

Release Notes and Update Instructions

ConferenceSHOT ePTZ Auto-Tracking Camera

Current Release

ConferenceSHOT ePTZ 1.1.0

June 26, 2023

New features

- You can now send Command Line Interface Shell (CLISH) commands using SSH as a secure alternative to Telnet. SSH access is disabled by default, and can be enabled on the device's Security page.
- You can now restore factory defaults using the IR remote:
 - Press the Data Screen button.
 - Clear preset 1, then clear preset 5.
 - Press the Data Screen button again. The camera enters standby mode and is ready to restore defaults.
 - Disconnect power, then reconnect. The camera returns to factory default settings.
- When not using this device for the USB stream's audio, you can now disable USB Audio Enumeration setting on the Streaming page.
- A new behavior setting, "When Exiting Standby", provides the choice of returning to the camera's last known PTZ position rather than the default behavior of recalling the Home preset when coming out of standby. The new setting is available on the System page's General tab.
- You can now control the on-screen IP and MAC address display from the System page of the web interface. The Device Utilities area on the Firmware tab provides a Data Screen button that shows the current state of the display.
- A new CLISH command, video resolution, returns the current HDMI output resolution (`video resolution get`) or sets the HDMI output resolution (`video resolution set <value>`). Resolution values are:
 - auto
 - 1080p/60
 - 1080p/59.94
 - 1080p/50
 - 1080p/30
 - 1080p/25
 - 720p/60
 - 720p/59.94
 - 720p/50

Improvements

- Under certain lighting conditions, motion could cause a reddish glow to appear. This has been fixed.
- When using a non-16:9 IP streaming resolution, the image is now cropped correctly to prevent image distortion.

Release History

ConferenceSHOT ePTZ 1.0.0

November 3, 2021

Notes

- Initial release.


Firmware Update Instructions – ConferenceSHOT ePTZ

The process for updating firmware is the same for virtually all Vaddio products. *The screen shot in this procedure is from a different camera.*

Caution

The camera must remain connected to power and to the network during the update. Interrupting the update could make the camera unusable. If the update does not run, DO NOT DISCONNECT POWER. Call Vaddio Tech Support immediately: +1 763-971-4400 or 800-572-2011.

1. Download the firmware file if you have not done so already.
2. Access the device's web interface and log in as `admin`.
3. On the System page, select Choose File and select the file you downloaded. Then select Begin Firmware Update.

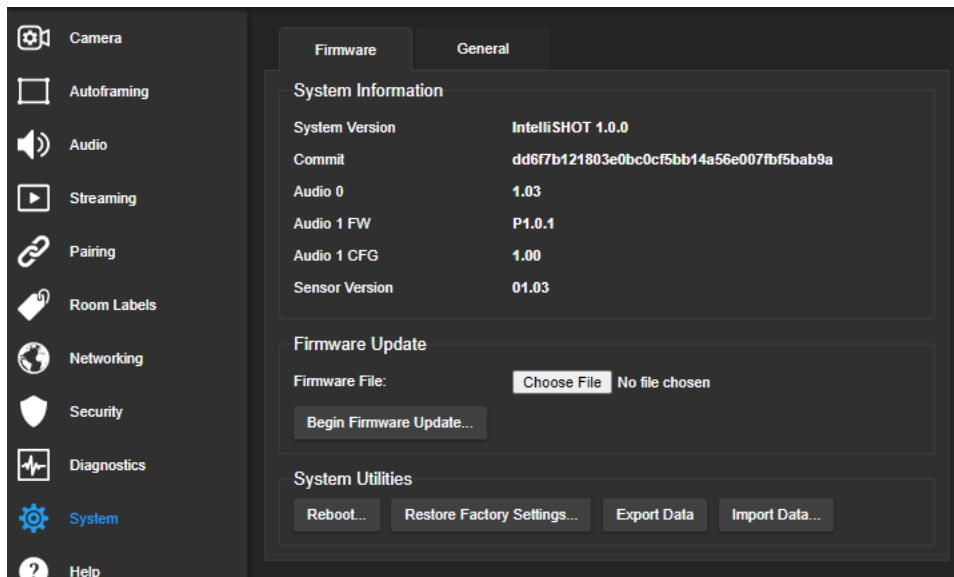

4. Read the Confirm dialog box, then select OK. You will be prompted to log in again when the process is complete.

This update can take up to 5 minutes to complete. While you're waiting, you could try the following:

- Think about the most wonderful, amazing thing you experienced as a kid.
- List the traits of a hypothetical perfect pet.
- It's been said that there's no such thing as useless knowledge. Can you disprove this?

After the update is complete, the System page will display the new firmware version under System Information. Enjoy that new-firmware smell!

Vaddio is a brand of Legrand AV Inc. · www.legrandav.com · Phone 800.572.2011 / +1.763.971.4400 · Fax +1.763.971.4464
Email – Europe, Middle East, Africa: av.emea.vaddio.support@legrand.com | All other regions: av.vaddio.techsupport@legrand.com

Vaddio is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

©2023 Legrand AV Inc.

A brand of  **legrand**