


HC 284 PUB

71,1 cm / 28" Diagonal
LED Backlight – Format 16:9

- 28" 16:9 LED Backlight Monitor
- 3840 x 2160 Ultra-HD 4K Resolution
- 178°/178° Ultra Wide Viewing Angle
- Digital Inputs: DP + HDMI
- USB 3.0 HUB
- Built-In Stereo Speakers
- Frameless Design and Slim Profile
- Tilt and Wall-Mountable (VESA)
- Low Power Consumption
- External Power Adaptor
- Low Blue Light Mode, Flicker Free
- PIP: Picture In Picture
- PBP: Picture by Picture



71,1 cm / 28"

Part No.: HC 284 PUB

SIZE, RESOLUTION



28"
16:9 Aspect Ratio



Ultra HD (4K)
3840 x 2160

CONNECTIVITY, SPEAKER



HDMI
Display Port



Built-In
Stereo Speaker

VIEWING ANGLE, USB



178°/178° Wide
Viewing Angle



USB 3.0 HUB

OTHER FEATURES



Slim
Design



Tilt





Low Blue
Light
Mode



Flicker
Free

Display Size	71,1 cm / 28" Diagonal
Panel Type	LED Backlight - AAS Panel*
Aspect Ratio	16:9
Resolution (H x V)	3840 x 2160 Ultra-HD 4K
Brightness	300cd/m ² (Typical)
Contrast (Typ.)	1.000:1 (Typical)
Contrast (Active)	10.000.000:1 (Active)
Viewing Angle L/R; U/D	178° H – 178° V (CR >10)
Response Time	5 msec (with OD)
Pixel Pitch	0,16 (H) x 0,16 (V) mm
Panel Surface	Anti-Glare, Haze-level 25%; Hard Coating 3H
Display Colors	1.073B
Horizontal Frequency	30 ~ 135 kHz
Vertical Frequency	56 ~ 75 Hz
Max Display Frequency	3840 x 2160 @ 60Hz
Input 1	HDMI 2.0 x 1
Input 2	DP 1.2 x 1
Input 3	USB HUB 3.0 (1 upstream, 2 downstream)
Input 4	USB 2.0 (only for FW update)
Buil-in Speakers	Yes, 2W x 2, Earphone jack
Power Consumption	On: 27W; Standby: 0,5W; Off: 0,3W
AC Power Range	External PSU DC: 12V – 4A Input: AC 100 ~ 240 Volt; 50 ~ 60 Hz
Product Dimensions	638,7 x 190 x 462,5 mm with stand (W x D x H) 638,7 x 42,7 x 369,2 mm without stand (W x D x H)
Packing Dimensions	720 x 135 x 437 mm (W x D x H)
Net / Gross Weight	4,55 Kg / 6,1 Kg

VESA Mounting	Yes, 100 x 100 mm
Monitor Stand	Fixed Stand (Quick Release)
Tilt / Kensington Lock	-5°~15° (±2°) / Yes
Pivot / Swivel	- / -
Controls	Menu (Enter) / < (Bri) / > (Vol) / Exit (Input) / Power
Color	Warm / Normal / Cool / User Modes
Preset Mode	Standard, ECO, Movie, Game Modes
On Screen Display	7 OSD Languages
Other Features	PIP: Picture In Picture / PBP: Picture By Picture Low Blue Light Mode / Flicker Free
Accessory	Power Adaptor; Power Cable (1,5m); DP 1.2 Cable (1,5m); Quick Start Guide; Warranty Card

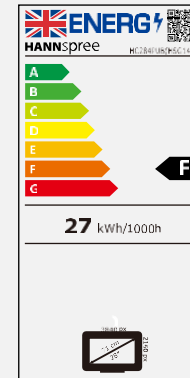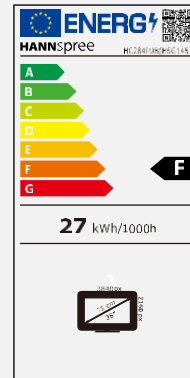

Supplier's Name	HANNspree
Model Name	HC284PUB
Energy efficiency class for standard Dynamic Range (SDR)	F
Annual Energy Power Consumption (kWh/1000h)	27 kWh/1000h
On mode power demand for Standard Dynamic Range (SDR)	27 W
Off mode power demand (W)	0,3 W
Standby mode power demand (W)	0,5 W
Screen Diagonal (cm / inches)	71,1cm / 28"
Resolution	3840 x 2160

PART NO.:
HC 284 PUB

