

Aero Range - Wi-Fi 6 Outdoor AP

SIL WCAP-AX-EXT







SIL WCAP-AX-EXT 1800Mbps 802.11AX Dual Band Wireless Outdoor AP

All New Robust Performance, Wireless Outdoor Access Point

OVERVIEW

The SIL WCAP-AX-EXT is a powerful, IP67 wireless outdoor access point.

As part of the new Intelligent Wi-Fi 6 "Aero" range by SilverNet, the cloud-managed WCAP-AX-EXT is designed to build high performance enterprise Wi-Fi networks, while also making enterprise management simple.

Offering superior outdoor Wi-Fi range with a TX-Power up to 23dBm, plus a Wireless cover distance up to 200 metres, it's ideal for numerous uses, particularly commercial and hospitality applications. From providing hotspot functionality, to supporting various hotspot authentication methods such as vouchers, local accounts or, for example Facebook, it provides strong support in across shopping centres, schools, hotels and more.

With options to manage the AP locally or via the cloud, the flexibility of this equipment allows you to offer a full, end-to-end managed Wi-Fi service to meet your client's needs. It is also efficient when used as a standalone AP.

Keep things running smoothly for both you and your customer. You'll stay informed about your customer's Wi-Fi client signal health and internet quality, putting an end to common, unnecessary support calls. Time consuming tasks like RF troubleshooting and bulk software upgrades are a breeze, and installation is a simple, speedy job.

Its strong outer shell helps protect the equipment from external forces, be that external signals or extreme weather conditions, and with a 1 year warranty as standard you'll have nothing to worry about.

Features

- WIFI 6, 802.11ax chipset, 1800Mbps
- Coverage Range: 200m
- WAN 10/100/1000-BASE-T
- PoE 802.af
- Channel optimisation
- Automatic interference avoidance
- Up to 8 SSID (4 on 2.4GHz, 4 on 5.8GHz)
- IP67 Rated Outdoor Enclosure

- Client Load Balancing
- AES Encryption
- VLANS
- PING Watchdog
- MAC Access control
- Easy to install
- Local or Cloud Management
- 1 Year warranty

Copyright © SilverNet Limited. All rights reserved. All other company and product names may be trademarks of their respective companies. Whilst every effort is made to make sure the information shown is accurate, SilverNet Limited can not accept liability for any errors that may arise. No freedom to use information, patents, trademarks or other intellectual property rights is implied by the publication of this document. E&OE. SilverNet Limited reserve the right to change specifications and other information within this document without notice and your attention is brought to the fact that performance figures are under ideal conditions. Actual performance will depend on many environmental factors, and it is recommended that a site survey is undertaken prior to installation. Please also note that this equipment may also be subject to local legislative restrictions. It is the end user's responsibility to ensure that the installation complies with any such restrictions that are in force.



Distributed By:

SILVERNET WIRELESS-NETWORK-SOLUTIONS

Superior Performance Features

Full body UV Stabilised IP67 Enclosure

The protective shell of the WCAP-AX-EXT is an incredible shield to both environmental factors and signal interference.

Made with innovative new generation materials it can effectively shield the interference of external signals to the host. It's also adaptive; through heat dissipation can adapt to harsh environments like storms, extreme cold and snow.

Seamless Roaming

Roaming has never been smoother.

802.11k and 802.11v Seamless Roaming provides smooth, unnoticeable switching to whichever access point has the most optimal signal when moving between APs.

Intelligent Spectrum Management

Success in the 2.4GHz and 5GHz spectrum requires an intelligent management system to remain interference free. The WCAP-AX-EXT has you covered.

It automatically selects the best channel on startup, and uses an ongoing auto channel algorithm to alert and change channels if performance suffers due to interference.

Increased Efficiency with OFDMA


Reduced latency and efficient channel usage are the benefits of using OFDMA

Picture your Wi-Fi connection as a series of delivery vans, delivering data packets to your users. With 802.11ax, a "van" can deliver multiple packets to multiple users simultaneously, by splitting the bandwidth into individual "delivery" slots.

This results in a vast improvement in efficiency, working for both uploads and downloads.





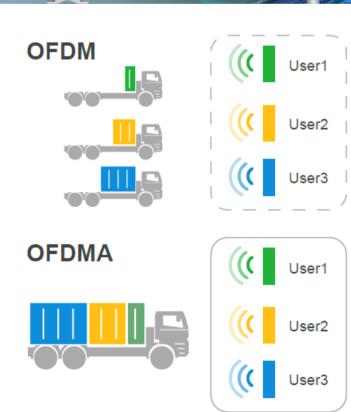



Technical Specifications

Part No.	SIL WCAP-AX-EXT		
Performance			
Max Throughput	1800Mbps (2.4GHz: 600Mbps, 5GHz: 1200Mbps)		
Client Capacity	160+		
Wireless Protocols	802.11ax/ac/a/n/g/b		
Flash	SPI NOR 8MB + 128MB		
Memory	512MB		
Modes	WISP Wireless Range Extender (Repeater)		
	Wireless Range Extender (Repeater) Wired WiFi Extension (AP Mode)		
Power Consumption	24W		
Power Over Ethernet	48V PoE on WAN Port		
Radio			
MIMO & Modulation	2x2:2 MIMO OFDMA Up to 256-QAM		
Bandwidth	20/40/80/160 MHz Channels		
Frequency Range	2400 – 2484MHz; 5150 – 5850MHz		
Max Output Power	23dBm		
Ante	enna		
Туре	Internal		
Pattern	3dBi @ 2.4GHz, 6dBi @ 5.8GHz		
Inte	rface		
WAN / LAN	2 x 10/100/1000-BASE-T		
Reset Button	1x Reset Button (Press & Hold for 10 seconds to revert to factory default)		
Physical			
Dimensions (mm)	180mm W x 85mm H x 304mm L		
Enclosure	UV Stabilized Plastic		
IP Rating	IP67		
Environment			
Operating Temperature	-30°C to +70°C		
Operating Humidity	5% to 95% Non-Condensing		
Storage Temperature	-40°C to +70°C		
Lightning Level	Common Mode: 6KV Differential Mode: 2KV		
Standards			
Approvals	IEC62368-1:2014+A11:2017		
	ETSI EN 301 489-1		
	ETSI EN 300 328		
	ETSLEN 300 440 ETSLEN 300 893		
Safety	IEC/EN		
RoHS Compliance	Yes		
Wi-Fi Certified	Yes		
Reset Button Physical Physica	1x Reset Button (Press & Hold for 10 seconds to revert to factory default) 180mm W x 85mm H x 304mm L UV Stabilized Plastic IP67 ronment -30°C to +70°C 5% to 95% Non-Condensing -40°C to +70°C Common Mode: 6KV Differential Mode: 2KV rolards IEC62368-1:2014+A11:2017 EN IEC 62311:2023 ETSI EN 301 489-1 ETSI EN 301 489-1 ETSI EN 301 489-1 ETSI EN 301 489-17 ETSI EN 300 328 ETSI EN 300 440 ETSI EN 300 440 ETSI EN 300 4893 IEC/EN		



Part Numbers & Accessories

802.11ax Access Points

Part Code	Description
SIL WCAP-AX	Wi-Fi standard 802.11ax/ac/n/a/g/b, Operating on 2.4GHz & 5GHz, Speeds up to 1800Mbps, 18dBm, 4dBi MIMO antenna, Multi-SSID Up to 8 SSID Per radio, wireless security: WPA2-PSK, WPA-Enterprise (WPA/WPA1,TKIP/AES) Concurrent Clients 120+ Range 150m.
SIL WCAP-AX-EXT+	Wi-Fi Standard 802.11ax/ac/n/a/g/b. Frequency 2.4GHz & 5GHz, Speeds up to 1800Mbps, Max TX Power 24dBm, Quad N-Type Connector for Dual Band, Up to 8 SSID Per Radio, Wireless Security WEP,WPA-PSK,WPA Enterprise, (WPA/WPA2,TKIP/AES) Concurrent clients 160+.
SIL WCAP-AX-W	Wi-Fi standard 802.11ax/ac/n/a/g/b, Operating on 2.4GHz and 5GHz, at a speeds up to 1800Mbps, 2dBi 2.4GHz / 5dBi 5GHz Dual Band Omni with up to 8 SSID Per radio, range up to 50m with 120+ concurrent clients.

AP Controller

Part Code	Description
SIL WAC-AX	Dual-Core 1.8GHz CPU, 2GB DDR RAM, 32G SSD, Ethernet 5*10/100/1000Mbps LAN / WAN port, 1 x 10/100/1000Mbps WAN Port, 2x USB 1.1 Port, 1 x RJ45 Console Port, Power & SSID Indicator, Desk-top and Mount Rack.