Blackmagicdesign

ATEM 4 M/E Advanced Panel 40

This massive model is big enough to perfectly match the features on the ATEM Constellation switcher! It features 4 M/E rows with 40 input buttons per row and 4 independent system control LCDs for each row. This massive panel includes 24 LCD's for custom labeling of every button on every row!
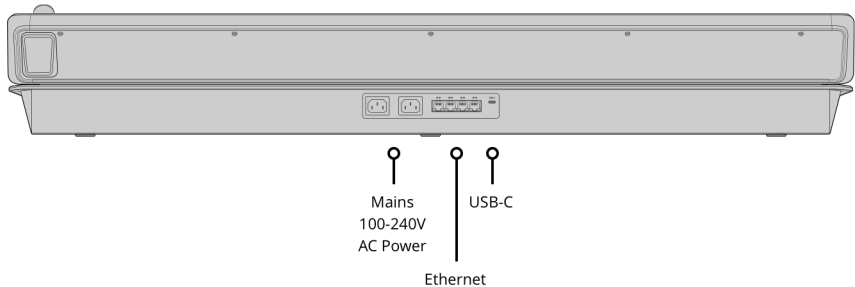
£14,739

Connections

Ethernet
4 x 10/100/1000 BaseT with loop output for additional control panels or computers.

Software Updates
1 x USB-C for firmware updates.

Mains
100-240V
AC Power

USB-C

Ethernet

Product Specifics

Number of Mix Effects Rows	**Crosspoint Label**	**Preview Transition**
4	10 rows 24 character LCD	4
Direct Cross Points	**On-Air indicator**	**Transition Rate Displays**
40	20	Via main menu
Shifted Cross Points	**Power Status Indicators**	**LCD Menu Displays**
80	None	4
Crosspoint Button Type	**DSK Transition Selectors**	**Menu Control**
Tri-Color LED	4 x Auto, Cut, Tie/Preview	4 x 20 buttons

Dedicated Macro Buttons	Source Select Bus	Numeric Keypad
4 x 40	4	1

Transport Control Buttons	Fader Bar	
24	4	

Destination Bus	3 Axis Joystick	
4	1	

Software

Software Applications
ATEM Software Control Panel.

Operating Systems

Mac 10.14 Mojave,
Mac 10.15 Catalina or later.

Windows 10, 64-bit.

Power Requirements

Input Voltage	Redundant Power	Power Usage
2 x Internal 100 - 240V AC.	Yes	250W

Physical Specifications

Environmental Specifications

Operating Temperature
0° to 40° C (32° to 104° F)

Storage Temperature
-20° to 60° C (-4° to 140° F)

Relative Humidity
Up to 95%

What's Included

ATEM 4 M/E Advanced Panel 40

Warranty

12 Month Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller