

MC5x/MC6x Technical Accessory Guide





NOTE: MC55X to be discontinued 12/2020 - see PMB 10439
MC67NA (GSM) discontinued 2/2020 - PMB 10262
MC67ND (dual carrier) discontinued 1/2018 - PMB 3001
MC55A0 discontinued 8/2017 - PMB 2960
MC55N0 discontinued 5/2017 - PMB 2960
MC65 discontinued 6/2015
MC55 discontinued 4/2011

Does not include MC50 accessories. See separate guide for MC50 accessories









NOTE: This document is only for general reference. Solutions Pathway and related PMBs should be used for product availability, pricing, and final solution selection.







* Zebra does not endorse or specifically recommend any **third-party products, accessories, or hardware**. ZEBRA DISCLAIMS ANY AND ALL LIABILITY, INCLUDING ANY EXPRESS OR IMPLIED WARRANTIES, WHETHER ORAL OR WRITTEN, FOR SUCH THIRD PARTY PRODUCTS, ACCESSORIES, OR HARDWARE. THE CUSTOMER ACKNOWLEDGES THAT NO REPRESENTATION HAS BEEN MADE BY ZEBRA AS TO THE FITNESS OF THE THIRD-PARTY PRODUCTS, ACCESSORIES, OR HARDWARE FOR THE CUSTOMER'S INTENDED PURPOSE.






Cradles/Charging






Part Number	Picture	Description	Notes	Required Items
CRD-MC5X-RCHG1		Single Slot Cradle	<ul style="list-style-type: none"> ▶ Cradle provides additional stability for devices with RFID Sled (RFD5500) to be docked in cradle. ▶ Provides USB support (no Serial/RS232) ▶ Supports terminal and spare battery charging (1X or 2X) ▶ LED notification of spare battery charging status. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R). ▶ Also requires 25-68596-01R for host communication.
CRD5500-1000UR		Single Slot Cradle	<ul style="list-style-type: none"> ▶ Discontinued 6/2014. Now use CRD-MC5X-RCHG1. ▶ Provides USB support (no Serial/RS232) ▶ Supports terminal and spare battery charging (1X or 2X) ▶ LED notification of spare battery charging status. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01) OR ▶ PWR-14000-148R) ▶ AC Line Cord (23844-00-00R). ▶ Also requires 25-68596-01R for host communication.
CRD5500-100UES		Single Slot Cradle Kit	<ul style="list-style-type: none"> ▶ Provides USB support (no Serial/RS232) ▶ Supports terminal and spare battery charging (1 to 2.5X) ▶ LED notification of spare battery charging status. ▶ Includes PWR-BGA12V50W0WW, CBL-DC-388A1-01R and 23844-00-00R. As of 6/2014 will now use CRD-MC5X-RCHG1. ▶ Energy Star Compliant 	25-68596-01R for host communication.
CRD5500-100UR		Single Slot Cradle Kit	<ul style="list-style-type: none"> ▶ Provides USB support (no Serial/RS232) ▶ Supports terminal and spare battery charging (1 to 2.5X) ▶ LED notification of spare battery charging status. ▶ Includes KT-14000-148R and 23844-00-00R ▶ Discontinued 12/2010- replaced by CRD5500-100UES 	25-68596-01R for host communication.

CRD5500-101UES		Single Slot Cradle Kit	<ul style="list-style-type: none"> ► Provides USB support (no Serial/RS232) ► Supports terminal and spare battery charging (1 to 2.5X) ► LED notification of spare battery charging status. ► Includes PWR-BGA12V50W0WW and CBL-DC-388A1-01R. As of 6/2014 will now use CRD-MC5X-RCHG1. ► Kit usually order by International customers ► Energy Star Compliant 	23844-00-00R, 25-68596-01R for host communication.
CRD5500-101UR		Single Slot Cradle Kit	<ul style="list-style-type: none"> ► Provides USB support (no Serial/RS232) ► Supports terminal and spare battery charging (1 to 2.5X) ► LED notification of spare battery charging status. ► Includes KT-14000-148R ► Kit usually order by International customers ► Discontinued 12/2010- replaced by CRD5500-101UES 	23844-00-00R, 25-68596-01R for host communication.
CRD5501-1000XR		Single Slot Ethernet/Modem Cradle	<ul style="list-style-type: none"> ► Discontinued 10/2020 - see PMB 10477 ► Provides Ethernet or Modem support using toggle switch on bottom of cradle ► Includes Ethernet patch cable and telephone patch cable. ► Also provides USB support (no Serial/RS232) ► Supports terminal and spare battery charging (1X or 2X) ► LED lights on front of cradle provide notification of spare battery charging status and Modem/Ethernet activity. ► LED lights on rear of cradle provide notification of Ethernet speed and link/activity. ► Requires modem driver and country configurator utility to be installed on device (available on support website) ► MC67 Android will not support modem, only USB and Ethernet. 	<ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01) ► AC Line Cord (23844-00-00R). ► Also requires 25-68596-01R for ActiveSync host communication.
CRD5500-1000XR		Single Slot Ethernet/Modem Cradle	<ul style="list-style-type: none"> ► Discontinued 7/31/2013, now use CRD5501-1000XR. ► Provides Ethernet or Modem support using toggle switch on bottom of cradle ► Includes Ethernet patch cable and telephone patch cable. ► Also provides USB support (no Serial/RS232) ► Supports terminal and spare battery charging (1X or 2X) ► LED lights on front of cradle provide notification of spare battery charging status and Modem/Ethernet activity. ► LED lights on rear of cradle provide notification of Ethernet speed and link/activity. ► Requires Keyboard Firmware version 4.2 or higher and USB Modem Driver to be installed on MC55 (available on http://support.symbol.com) ► Not compatible with Android versions of MC67 	<ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01 OR PWRS-14000-148R) ► AC Line Cord (23844-00-00R). ► Also requires 25-68596-01R for ActiveSync host communication.

PSCMC67UE (3rd party) * http://www.portsmith.com		Portsmith Single Slot USB/Ethernet Cradle 	<ul style="list-style-type: none"> ▶Cradle communicates with the terminal via USB . ▶Connects to the LAN via a 10/100 mbps Ethernet connection. ▶Cradle accommodates terminals equipped with standard or extended batteries. ▶Also includes spare battery charging and supports both standard and extended capacity batteries. ▶Includes a USB port (mini-A/B) allowing direct connectivity to a host computer or other USB peripherals. ▶PSCMC67UE Kit includes Cradle, Power Supply, USB Cable, Ethernet Cable, US AC Line Cord. 	Portsmith Power Supply #190362-000LF or 190362-002LC
PSCMC55-65UE (3rd party) * http://www.portsmith.com		Portsmith Single Slot USB/Ethernet Cradle 	<ul style="list-style-type: none"> ▶Discontinued 2013, now use PSCMC67UE ▶Cradle communicates with the terminal via USB . ▶Connects to the LAN via a 10/100 mbps Ethernet connection. ▶Cradle accommodates terminals equipped with standard or extended batteries. ▶Also includes spare battery charging and supports both standard and extended capacity batteries. ▶Includes a USB port (mini-A/B) allowing direct connectivity to a host computer or other USB peripherals. 	Portsmith Power Supply #190362-000LF or 190362-002LC
CRD5501-4000CR		4-Slot Charge Only Cradle		<ul style="list-style-type: none"> ▶DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶AC Line Cord (23844-00-00R)
CRD5500-4000CR		4-Slot Charge Only Cradle	▶Discontinued 11/2012. Now use CRD5501-4000CR	<ul style="list-style-type: none"> ▶DC Line Cord (50-16002-029R) and Power Supply (PWRS-14000-241R) OR DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶AC Line Cord (23844-00-00R)
CRD5500-400CES		4-Slot Charge Only Cradle Kit	<ul style="list-style-type: none"> ▶Discontinued 11/2012. Now use CRD5501-401CES and 23844-00-00R. ▶Charges 4 terminals ▶Does not charge spare batteries. ▶Includes PWRS-14000-241R power supply, 50-16002-029R DC line cord, and 23844-00-00R AC line cord ▶Energy Star Compliant 	
CRD5500-400CR		4-Slot Charge Only Cradle Kit	<ul style="list-style-type: none"> ▶Charges 4 terminals ▶Does not charge spare batteries. ▶Includes 50-14000-241R power supply, 50-16002-029R DC line cord, and 23844-00-00R AC line cord ▶Discontinued 12/2010- replaced by CRD5500-400CES 	







CRD5501-401CES		4-Slot Charge Only Cradle Kit	<ul style="list-style-type: none"> ▶ Charges 4 terminals ▶ Does not charge spare batteries. ▶ Includes DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ Energy Star Compliant 	23844-00-00R
CRD5500-401CES		4-Slot Charge Only Cradle Kit	<ul style="list-style-type: none"> ▶ Discontinued 11/2012. Now use CRD5501-401CES ▶ Charges 4 terminals ▶ Does not charge spare batteries. ▶ Includes PWR5-14000-241R power supply, and 50-16002-029R DC line cord ▶ Kit usually order by International customers ▶ Energy Star Compliant 	23844-00-00R
CRD5500-401CR		4-Slot Charge Only Cradle Kit	<ul style="list-style-type: none"> ▶ Charges 4 terminals ▶ Does not charge spare batteries. ▶ Includes 50-14000-241R power supply, and 50-16002-029R DC line cord ▶ Kit usually order by International customers ▶ Discontinued 12/2010- replaced by CRD5500-401CES 	23844-00-00R
215593 (3rd party) * http://www.proclipusa.com/category/zebra		4-Slot Charge Only Cradle Kit	<ul style="list-style-type: none"> ▶ Charges 4 terminals ▶ Does not charge spare batteries. ▶ Includes power supply and worldwide AC line cords 	
PSP5MC67-01 (3rd party) * http://www.portsmith.com		Portsmith 5-Slot Charge-Only Dock	<ul style="list-style-type: none"> ▶ Charges five devices per module from a single power supply. ▶ Durable rugged ABS cradle materials ▶ Precision alignment of the handheld into the cradle ▶ One handed insertion and removable ▶ Safe and regulated power at each cup - 5VDC 2A delivered to each slot ▶ Powder-coated steel chassis ▶ Better space efficiency compared to five individual charging docks ▶ Dimensions: 23" wide, 5" deep, 7" tall ▶ Includes power supply and line cord for use in North America. 	
PSP4MC67-02 (3rd party) * http://www.portsmith.com		Portsmith 4-Slot Charge-Only Dock - for Rack Mounting	<ul style="list-style-type: none"> ▶ Charges four devices per rack module from a single power supply. ▶ Durable rugged ABS cradle materials ▶ Precision alignment of the handheld into the cradle ▶ One handed insertion and removable ▶ Safe and regulated power at each cup - 5VDC 2A delivered to each slot ▶ Powder-coated steel chassis ▶ Mounts in any industry standard server or wall mount rack ▶ 6U or 10.5 inches tall ▶ Includes power supply and line cord for use in North America. 	

CRD5501-4000ER		4-Slot Ethernet/Charging Cradle	<ul style="list-style-type: none"> ▶ Allows speeds up to 1 Gb ▶ Uses less power than CRD5500-4000ER with IEEE 802.3az, "EEE" (Energy Efficient Ethernet) ▶ Charges 4 terminals ▶ Does <u>not</u> charge spare batteries. ▶ Ethernet connectivity to host ▶ Ethernet daisy chain support ▶ USB Host connection to MC55/65 ▶ Requires additional driver from support website. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00R)
CRD5500-4000ER		4-Slot Ethernet/Charging Cradle	<ul style="list-style-type: none"> ▶ Discontinued 12/3/2012, now use CRD5501-4000ER ▶ Charges 4 terminals ▶ Does <u>not</u> charge spare batteries. ▶ Ethernet connectivity to host ▶ Ethernet daisy chain support ▶ USB Host connection to MC55/65 - does not require additional software on device. 	<ul style="list-style-type: none"> ▶ DC Line Cord (50-16002-029R) and Power Supply (PWRS-14000-241R) OR ▶ DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00R)
CRD5501-401EES		4-Slot Ethernet/Charging Cradle Kit	<ul style="list-style-type: none"> ▶ Allows speeds up to 1 Gb ▶ Charges 4 terminals ▶ Does not charge spare batteries. ▶ Ethernet connectivity to host ▶ Ethernet daisy chain support ▶ USB Host connection to MC55/65 ▶ Includes DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ Uses less power than CRD5500-4000ER with IEEE 802.3az, "EEE" (Energy Efficient Ethernet) ▶ Requires additional driver from support website. 	AC Line Cord (23844-00-00R).
CRD5500-400EES		4-Slot Ethernet/Charging Cradle Kit	<ul style="list-style-type: none"> ▶ Discontinued 12/3/2012, now use CRD5501-401EES and 23844-00-00R ▶ Charges 4 terminals ▶ Does not charge spare batteries. ▶ Ethernet connectivity to host ▶ Ethernet daisy chain support ▶ USB Host connection to MC55/65 - does not require additional software on device. ▶ Includes PWRS-14000-241R power supply, and 50-16002-029R DC line cord, and 23844-00-00 AC line cord ▶ Energy Star Compliant 	
CRD5500-400ER		4-Slot Ethernet/Charging Cradle Kit	<ul style="list-style-type: none"> ▶ Charges 4 terminals ▶ Does not charge spare batteries. ▶ Ethernet connectivity to host ▶ Ethernet daisy chain support ▶ USB Host connection to MC55/65 - does not require additional software on device. ▶ Includes 50-14000-241R power supply, and 50-16002-029R DC line cord, and 23844-00-00 AC line cord ▶ Discontinued 12/2010- replaced by CRD5500-400EES 	








CRD5500-401EES		4-Slot Ethernet/Charging Cradle Kit	<ul style="list-style-type: none"> ▶ Discontinued 12/3/2012, now use CRD5501-401EES ▶ Charges 4 terminals ▶ Does not charge spare batteries. ▶ Ethernet connectivity to host ▶ Ethernet daisy chain support ▶ USB Host connection to MC55/65 - does not require additional software on device. ▶ Includes PWRS-14000-241R power supply, and 50-16002-029R DC line cord, and 23844-00-00 AC line cord ▶ Kit usually order by International customers ▶ Energy Star Compliant 	23844-00-00R
CRD5500-401ER		4-Slot Ethernet/Charging Cradle Kit	<ul style="list-style-type: none"> ▶ Charges 4 terminals ▶ Does not charge spare batteries. ▶ Ethernet connectivity to host ▶ Ethernet daisy chain support ▶ USB Host connection to MC55/65 - does not require additional software on device. ▶ Includes 50-14000-241R power supply, and 50-16002-029R DC line cord, and 23844-00-00 AC line cord ▶ Kit usually order by International customers ▶ Discontinued 12/2010- replaced by CRD5500-401EES 	23844-00-00R
KT-136648-01R		Wall Mount Bracket for 4-Slot Cradles	<ul style="list-style-type: none"> ▶ Allows cradle to be mounted on a wall. ▶ Replaces 8710-050006-01R. Updated design allows additional wall clearance when using CRD3000-4000 cradle and gun version of device. 	CRD5500-4000ER or CRD5500-4000CR
8710-050006-01R		Wall Mount Bracket for 4-Slot Cradles	<ul style="list-style-type: none"> ▶ Discontinued 8/2011, now use KT-136648-01R ▶ Allows cradle to be mounted on a wall. 	CRD5500-4000ER or CRD5500-4000CR
KT-132400-01R		19" Rack Mount Bracket	<ul style="list-style-type: none"> ▶ Enables mounting of one 4-Slot Cradle (CRD5500-4000ER or CRD5500-4000CR) to a standard network rack. ▶ Cradle must first be mounted to Wall Mount Bracket which then attaches to Rack Mount Bracket. ▶ Bracket hides Power Supply and DC Line Cord 	Wall Mount Bracket (KT-136648-01R)






VCD5500-1201R		Vehicle Cradle	<ul style="list-style-type: none"> ► Works with 1X or 2X batteries ► Does NOT charge spare batteries ► Does not provide any ports for connecting peripherals. ► Redesigned to eliminate the slight possibility of the cradle catching on the keyboard overlay after repeated insertions and loosening it. The lower housing has been moved down a few millimeters to eliminate any possibility of interfering with the keyboard overlay 	<p>Cradle Power Supply cable 25-128973-01R (straight cable) or 25-128974-01R (right angle cable)</p> <p>Requires integrator/installer to provide a means to mount the cradle in the vehicle.</p>
VCD5500-1001R		Vehicle Cradle kit	<ul style="list-style-type: none"> ► Includes power wiring harness from cradle to vehicle. ► Works with 1X or 2X batteries ► Does NOT charge spare batteries ► Does not provide any ports for connecting peripherals. ► Redesigned to eliminate the slight possibility of the cradle catching on the keyboard overlay after repeated insertions and loosening it. The lower housing has been moved down a few millimeters to eliminate any possibility of interfering with the keyboard overlay 	Requires integrator/installer to provide a means to mount the cradle in the vehicle.
VCD5500-1000R		Vehicle Cradle kit	<ul style="list-style-type: none"> ► Discontinued 2/2011, now use VCD5500-1001R ► Includes power wiring harness from cradle to vehicle. ► Works with 1X or 2X batteries ► Does NOT charge spare batteries ► Does not provide any ports for connecting peripherals. 	Requires integrator/installer to provide a means to mount the cradle in the vehicle.
25-128973-01R		Vehicle Cradle Power supply cable (straight)	<ul style="list-style-type: none"> ► to be discontinued 2/2021, see PMB 10520 ► Cable is more rugged than predecessor cable (25-61987-01R) 	
25-61987-01R		Vehicle Cradle Power supply cable (straight)	<ul style="list-style-type: none"> ► Discontinued - Now use 25-128973-01R which is a more rugged cable ► Cable is normally included with the Vehicle Cradle (VCD5500) 	
25-128974-01R		Vehicle Cradle Power supply cable (90° bend)	<ul style="list-style-type: none"> ► Cable has 90° bend at vehicle cradle connector end for tighter vehicle installations 	





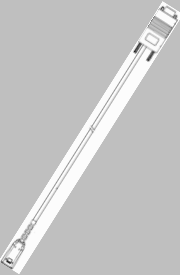


VCH5500-1000R		Vehicle Holder	<ul style="list-style-type: none"> ▶ Discontinued 7/2020 - see PMB 10477 ▶ Suction mounts to vehicle's windshield or other smooth surface ▶ Works with 1X or 2X batteries 	VCA5500-12R to charge MC55 while in the holder.
VCH5500-111R		Vehicle Holder Kit	<ul style="list-style-type: none"> ▶ Discontinued 7/2020 - see PMB 10477 ▶ Suction mounts to vehicle's windshield or other smooth surface ▶ Works with 1X or 2X batteries ▶ Includes VCA5500-01R Auto Charge cable 	
VCH5500-101R		Vehicle Holder Kit	<ul style="list-style-type: none"> ▶ Discontinued 10/2009, replaced by VCH5500-111R ▶ Suction mounts to vehicle's windshield or other smooth surface ▶ Works with 1X or 2X batteries ▶ Includes VCA5500-12R Auto Charge cable 	
RAM-HOL-SYM3PU (3rd party) * http://www.ram-mount.com		Vehicle Cradle	<ul style="list-style-type: none"> ▶ Accepts between 12-28 Volt DC Input. ▶ USB connection included ▶ Two externally mounted stylus ▶ Cradle can be mounted in a different environments using additional bracket options available on website. 	
TIS Multicradle (3rd party) * http://www.tis-gmbh.de/en/		TIS Multi-Cradle Vehicle Cradles	<ul style="list-style-type: none"> ▶ Powered vehicle cradle with either cigarette light adapter or bare wire connector ▶ "Rock&Lock" mechanism enables easy insertion and a reliable lock ▶ Optional interfaces/ports: <ul style="list-style-type: none"> - Integrated smart-card reader - RS232 (USB to serial conversion)(can provide 5V/150 mA power for scanner) - USB (standard USB A connector) - External speaker ▶ Front accessible screw holes enable easy dashboard or wall mounting ▶ Power indication LED ▶ Wide input voltage range: 9-30V ▶ Serial port not compatible with Android versions of MC67 	


<p>ProClip various (3rd party) *</p> <p>http://www.proclipusa.com/category/zebra</p>		<p>ProClip Vehicle Cradles</p>  <p>See Zebra's ProClip accessory overview video at: http://www.zebra.com/us/products/Accessories/ProClip/ProClipOverview</p>	<ul style="list-style-type: none"> ► Available in both powered and un-powered versions (cigarette lighter adapter or straight through power cable) ► Certain models also provide for USB On-The-Go connection which can be used for USB host or RS232 connections (with additional add-on cables available from the website) ► Certain models also provide spare battery charging slot. ► Cradle tilts and swivels ► Compatible with all device battery sizes. ► Works with snap-on accessories ► Serial port not compatible with Android versions of MC67 	
<p>PSVMC67-01 (Charge-Only with Cigarette Lighter Adapter plug)</p> <p>PSVMC67-02 (Charge-Only with Hard-wired power connection)</p> <p>(3rd party) *</p> <p>http://www.portsmith.com</p>		<p>PortSmith Vehicle Cradles</p>	<ul style="list-style-type: none"> ► Available in both hard-wired and cigarette light adapter cable configurations ► Durable cradle design for rugged enterprise use ► AMPS hole pattern for simple wall, pedestal or vehicle dashboard mounting ► Swivel mount ► Works with snap-on accessories ► Additional cradles that provide communication ports also available. Contact Portsmith at 208-888-5813. 	
SAC5500-4000CR		4-Slot Battery Charger	<ul style="list-style-type: none"> ► This cradle charges spare batteries only (1X or 2X size). 	<ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01) ► AC Line Cord (23844-00-00R).
SAC5500-400CES		4-Slot Battery Charger Kit	<ul style="list-style-type: none"> ► This cradle charges spare batteries only (1X or 2X size). ► Includes PWR-BGA12V50W0WW, CBL-DC-388A1-01 and 23844-00-00R ► Energy Star Compliant 	
SAC5500-400CR		4-Slot Battery Charger Kit	<ul style="list-style-type: none"> ► This cradle charges spare batteries only (1X or 2X size). ► Includes KT-14000-148R and 23844-00-00R ► Discontinued 12/2010- replaced by SAC5500-400CES 	

SAC5500-401CES		4-Slot Battery Charger Kit	<ul style="list-style-type: none"> ▶ This cradle charges spare batteries only (1X or 2X size). ▶ Includes PWR-BGA12V50W0WW and CBL-DC-388A1-01. ▶ Kit usually order by International customers ▶ Energy Star Compliant 	23844-00-00R
SAC5500-401CR		4-Slot Battery Charger Kit	<ul style="list-style-type: none"> ▶ This cradle charges spare batteries only (1X or 2X size). ▶ Includes KT-14000-148R ▶ Kit usually order by International customers ▶ Discontinued 12/2010- replaced by SAC5500-401CES 	23844-00-00R
SAC2000-4000CR		Four-Slot Spare Battery Charger for RFD5500	<ul style="list-style-type: none"> ▶ Used to charge battery of RFD5500 (RFID Trigger Handle Sled) 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R).
KT-SAC2000-4US		Four-Slot Spare Battery Charger Kit for RFD5500	<ul style="list-style-type: none"> ▶ Used to charge battery of RFD5500 (RFID Trigger Handle Sled) ▶ Includes PWR-BGA12V50W0WW, CBL-DC-388A1-01 and 23844-00-00R AC Line Cord 	
KT-SAC2000-4WW		Four-Slot Spare Battery Charger Kit for RFD5500	<ul style="list-style-type: none"> ▶ Used to charge battery of RFD5500 (RFID Trigger Handle Sled) ▶ Includes PWR-BGA12V50W0WW and CBL-DC-388A1-01. ▶ Kit usually order by International customers 	▶ 23844-00-00R or compatible AC Line Cord
VCA5500-01R		Auto Charge/Cigarette Lighter Adapter Cable	<ul style="list-style-type: none"> ▶ 12-24 volt DC input ▶ Updated to reuse the auto charge power adapter design that was implemented for MC75 and MC9500 product families 	
VCA5500-12R		Auto Charge/Cigarette Lighter Adapter Cable	<ul style="list-style-type: none"> ▶ Discontinued 10/2009, replaced by VCA5500-01R ▶ 12-24 volt DC input 	

25-112560-01R		Charge Only Cable Cup	<ul style="list-style-type: none"> ▶ 5 inch long cable ▶ Convenient for those customers who only require cable charging when traveling. 	Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R)
Communication Cables				
Part Number	Picture	Description	Notes	Required Items
25-108022-04R		USB Communication/Charging Cable with Cup	<ul style="list-style-type: none"> ▶ Includes a more robust thermoplastic polyurethane (TPU) material for the cable jacket. 	Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging
25-108022-03R		USB Communication/Charging Cable with Cup	<ul style="list-style-type: none"> ▶ Discontinued 9/2014, now use 25-108022-04R ▶ Meets radiated and conducted emissions on the MC65 terminal 	Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging
25-108022-02R		USB Communication/Charging Cable with Cup	<ul style="list-style-type: none"> ▶ Discontinued 10/2013, now use 25-108022-03R ▶ Meets radiated and conducted emissions on the MC65 terminal 	Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging
25-108022-01R		USB Communication/Charging Cable with Cup	<ul style="list-style-type: none"> ▶ Discontinued 9/2011, now use 25-108022-02R 	Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging
25-68596-01R		USB Single-Slot cradle to ActiveSync PC/Host cable		CRD5500-1000UR
25-136283-01R		Serial Cable	<ul style="list-style-type: none"> ▶ Standard DB9 serial connection ▶ 40" (coiled cable) ▶ USB connection to MC device, converted to RS232 Serial connection ▶ No device charging capabilities ▶ No power output on serial pins (can't power serial scanner) ▶ May require USB to Serial drivers to be installed from Support website. ▶ Not compatible with Android versions of MC67 	

25-127558-02R		DEX Cable	<ul style="list-style-type: none"> ► Provides a more robust thermoplastic polyurethane (TPU) material for the cable jacket vs. 25-127558-01R. ► Standard ¼" plug connection to vending machine ► 40" (coiled cable) ► USB connection to device, converted to RS232 Serial to DEX connection ► No device charging capabilities ► May require USB to Serial drivers to be installed from Support website. ► Not compatible with Android versions of MC67 	
25-127558-01R		DEX Cable	<ul style="list-style-type: none"> ► Discontinued 4/2015, now use 25-127558-02R ► Standard ¼" plug connection to vending machine ► 40" (coiled cable) ► USB connection to device, converted to RS232 Serial to DEX connection ► No device charging capabilities ► May require USB to Serial drivers to be installed from Support website. ► Not compatible with Android versions of MC67 	
25-116536-01R		Programming Cable for DCR7X00	<ul style="list-style-type: none"> ► Discontinued 12/2013 ► Needed for programming and key injection ► Cable connects PC to DCR7X00 via serial port 	Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R)
KT-DCR7X00-CBLES		Programming Cable Kit for DCR7X00	<ul style="list-style-type: none"> ► Discontinued 12/2013 ► Includes 25-116536-01R, PWRS-14000-249R, and 50-16000-182R ► Needed for programming and key injection ► Cable connects PC to DCR7X00 via serial port ► Energy Star Compliant 	
KT-DCR7X00-CBL		Programming Cable Kit for DCR7X00	<ul style="list-style-type: none"> ► Includes 25-116536-01R, 50-14000-249R, and 50-16000-182R ► Needed for programming and key injection ► Cable connects PC to DCR7X00 via serial port ► Discontinued 12/2010- replaced by KT-DCR7X00-CBLES 	




KT-DCR7X00-CBL-ITL		Programming Cable Kit for DCR7X00	<ul style="list-style-type: none"> ► Includes 25-116536-01R and 50-14000-249R ► Needed for programming and key injection ► Cable connects PC to DCR7X00 via serial port ► Kit usually order by International customers ► Discontinued 12/2010- replaced by KT-DCR7X00-CBL-ITLES 	50-16000-182R
FAUSB01 (3rd party) * http://www.blackbox.com		USB A Female to USB A Female adapter	<ul style="list-style-type: none"> ► Allows the M55 to act as a USB host to connect to devices like USB flash drives, etc. ► This adapter works with the MC55 Cable Cup adapter. ► Requires USB Client/Host toggle applet to be installed in the device's Control Panel. 	25-108022-01R
GXQU-06 (3rd party) * (search online for retailer)		JDI GoldX QuickConnect 5-in-1 USB Cable Kit (6 ft.)	<ul style="list-style-type: none"> ► Allows the MC55 to act as a USB host to connect to devices like USB flash drives, etc. ► This cable works with the MC55 Single Slot cradle ► Use a mini A connector on one end and an A female connector on the other end. 	CRD5500-1000UR
RDUYS08220007		USB mini-A to USB A Female adapter	<ul style="list-style-type: none"> ► Allows the MC55 to act as a USB host to connect to devices like USB flash drives/memory sticks, mice, etc. ► This adapter works with the MC55 Single Slot Cradle. 	
170373-000 (3rd party) * http://www.portsmith.com		USB Cable: mini-A plug to mini-B plug	<ul style="list-style-type: none"> ► Allows the MC55 Single Slot Cradle to be connected to USB client peripherals like PortSmith's PS6U1UPE USB Ethernet Adapter. ► Can also be used to connect to other peripherals with a mini USB-B connector. 	
190087-000 (3rd party) * http://www.portsmith.com		USB Adapter Cable: type-A receptacle to mini-B plug	<ul style="list-style-type: none"> ► Allows the MC55 USB Communication/Charging Cable with Cup to be connected to USB client peripherals with a USB-A connector (i.e. USB mice, keyboards, etc.) 	
170573-000 (3rd party) * http://www.portsmith.com		USB Cable: mini-A plug to type-B plug	<ul style="list-style-type: none"> ► Allows the MC55 Single Slot Cradle to be connected to USB client peripherals like PortSmith's PSA1U1E USB Ethernet Adapter. ► Can also be used to connect to other peripherals with a mini USB-B connector. 	
Printing Solutions				
Part Number	Picture	Description	Notes	Required Items







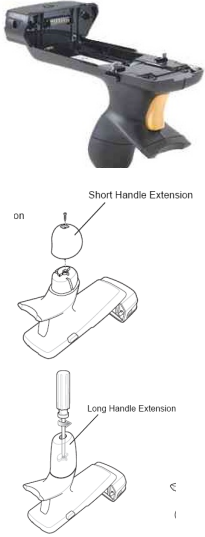

R4P-6U0A0000-00 (w/DEX) R4P-6U0A0100-00 (w/DEX and integrated MSR) R4P-6UBA0000-00 (w/DEX and Bluetooth) R4P-6UBA0100-00 (w/DEX, Bluetooth, integrated MSR)		RW420 Print Station for MC55/MC6X	Discontinued in 2014 and 2015	
200532-100 (w/Bluetooth, external/vehicle mount charge contacts) 200533-100 (w/Bluetooth, integrated MSR, DEX, external/vehicle mount charge contacts) (3rd party) * (Order from Datamax/O'Neil directly)		Datamax/O'Neil PrintPad for MC55/MC6X	<ul style="list-style-type: none"> ▶ Standard external charge port ▶ Standard Bluetooth ▶ Standard external charge contacts ▶ External light indicators ▶ Small foot print ▶ Prints standard 4.41" receipts and 4.41" 80-column invoices ▶ Accepts 2.25" roll diameter ▶ Print speed of up to 2 ips ▶ Includes (2) lithium batteries for 4400 mAh ▶ Optional features: <ul style="list-style-type: none"> - built-in MSR/credit card reader - DEX port - truck-mount bracket - settlement room brackets - shoulder strap ▶ Requires installation of CDC driver from http://www.datamax-oneil.com ▶ Serial/DEX port not compatible with Android versions of MC67 	





Snap-On Accessories







Part Number	Picture	Description	Notes	Required Items
MSR5500-100R		Snap-On MSR (Mag Stripe Reader)	<ul style="list-style-type: none"> ▶ Discontinued 6/2018 - PMB 2960 ▶ USB Interface to device ▶ Reads Tracks 1, 2, and 3 of a Magnetic Stripe ▶ Accommodates Power and Active Sync pass through to the MC55 while in a Single Slot Cradle, Four Slot Cradle, and all three charging cables (USB, Charge Only, and Auto Charge). ▶ MSR drivers must be downloaded from Support website. 	
DCR7X00-100R		Snap-On DCR (Debit Card Reader)	<ul style="list-style-type: none"> ▶ Discontinued 3/2015 ▶ Has 13-key pin pad on bottom of snap-on that will encrypt PIN data. ▶ Back of unit has one line 13-character LCD display ▶ Supports connection of charging cables (for MC7X) and provides USB pass-through ▶ DCR must be removed before inserting device in the Single Slot or 4-Slot cradle ▶ PED/PCI, APCA compliant ▶ Reads 3 MSR tracks to allow driver's license cards to be read. ▶ Communicates serially to MC65 via USB to Serial conversion ▶ NOT compatible with MC55 or MC67. Only compatible with MC65. 	DCR7X00-ADP







DCR7X00-200R		Snap-On DCR (Debit Card Reader) with Smart Card Reader	<ul style="list-style-type: none"> ▶ Discontinued 3/2015 ▶ For Canadian market ▶ Has 13-key pin pad on bottom of snap-on that will encrypt PIN data. ▶ Back of unit has two line LCD display ▶ Supports connection of charging cables (for MC7X) and provides USB pass-through ▶ DCR must be removed before inserting device in the Single Slot or 4-Slot cradle ▶ PED/PCI, APCA compliant ▶ Reads 3 MSR tracks to allow driver's license cards to be read. ▶ Communicates serially to MC55/MC65/MC67 via USB to Serial conversion ▶ Full contact Smart Card reader ▶ 2 SAM card slots ▶ Includes compliant software to enable Chip & PIN transactions ▶ EMV 1 and 2 certifications ▶ NOT compatible with MC55 or MC67. Only compatible with MC65. 	DCR7X00-ADP
DCR7X00-ADP		MC65 to DCR7X00 Adapter	<ul style="list-style-type: none"> ▶ Discontinued 10/2016 - PMB 2890 ▶ Allows the MC7X Debit/Smart Card Reader (DCR7X00) to be used with the MC65 ▶ Locking plate screws the DCR7X00 onto the Adapter to create a one-piece snap-on. ▶ NOT compatible with MC55 or MC67. Only compatible with MC65. 	








TRG5500-101R		Snap-On Pistol Grip handle	<ul style="list-style-type: none"> ► Expected to be discontinued 6/2022 - PMB 2960 ► Includes the standard trigger handle with short handle boot (makes handle length 3.64" , 92.4mm) and long handle boot (makes handle length 4.39" , 111.6mm). Customer can decide which boot option to use with handle. ► Works with WWAN and non-WWAN configurations as well as 1x and 1.5x battery configurations ► Accommodates Power and Active Sync pass through to the MC55/MC65 while in a Single Slot Cradle, Four Slot Cradle, and all three charging cables (USB, Charge Only, and Auto Charge). ► Works with MSR5500-100R (Snap-On MSR) and 25-127558-01R (DEX Cable) ► Will NOT work with the Vehicle Cradle (VCD5500). ► 4 ft. drop to concrete spec - breakaway at 4' ► Trigger handle drivers must be downloaded from Support website. ► Also compatible with Android versions of MC67 	► Optional - Lanyard (21-138874-01R)
TRG5500-100R		Snap-On Pistol Grip handle	<ul style="list-style-type: none"> ► Discontinued 5/25/12 - now use TRG5500-101R ► Works with WWAN and non-WWAN configurations as well as 1x and 1.5x battery configurations ► Accommodates Power and Active Sync pass through to the MC55/MC65 while in a Single Slot Cradle, Four Slot Cradle, and all three charging cables (USB, Charge Only, and Auto Charge). ► Works with MSR5500-100R (Snap-On MSR) and 25-127558-01R (DEX Cable) ► Will NOT work with the Vehicle Cradle (VCD5500). ► 4 ft. drop to concrete spec - breakaway at 4' ► Trigger handle drivers must be downloaded from Support website. ► Also compatible with Android versions of MC67 	► Optional - Lanyard (21-138874-01R)
<p>The following SKUs discontinued 10/2017 - PMB 3006</p> <p>RFD5500-GZ21US (US)</p> <p>RFD5500-GZ21EU (EMEA)</p> <p>RFD5500-GZ21CN (China)</p> <p>RFD5500-GZ21JP (Japan)</p> <p>discontinued 8/2017 - PMB 3006</p> <p>RFD5500-G011US (US)</p> <p>discontinued 5/2015, now use RFD5500-GZ21US</p> <p>RFD5500-G011EU (EMEA)</p> <p>discontinued 10/2014 - now use RFD5500-GZ21EU</p> <p>RFD5500-G011CN (China)</p> <p>discontinued 5/2015, now use RFD5500-GZ21CN</p>		RFID Trigger Handle Sled	<ul style="list-style-type: none"> ► Reads and writes EPC Class 1 Generation 2 tags (UHF). ► A rechargeable battery is used in the trigger handle to avoid reducing the run time of the MC55/65/67 (uses same battery as MT20xx series). ► The reader battery and MC55/65/67 can be charged together giving a "one piece, one charge" solution - Use snap-on Charge-Communication Cable, Single Slot Cradle, or 4-Slot Cradle. ► If necessary the battery can be swapped out in applications requiring continuous operation. ► Includes a circularly polarized antenna facing out of the rear side. ► Read range of up to 7 ft, depending on the type and number of RFID tags. ► Not compatible with MC55X or Android versions of MC67 	► Requires additional CAB file from Support Central to be installed on device.






1119-02-SO-UHF (for US) 1119-01-SO-UHF (for Europe) (3rd party) * http://www.tsl.uk.com http://www.bluestarinc.com		UHF RFID Reader 	<ul style="list-style-type: none"> ► Reads and writes EPC Class 1 Generation 2 tags. ► A rechargeable battery is used in the reader to avoid reducing the run time of the MC55/65/67. ► The reader battery and MC55/65 can be charged together giving a "one piece, one charge" solution. ► If necessary the battery can be swapped out in applications requiring continuous operation. ► Suitable for operation in European and US regulatory environments, including Dense Reader Mode. ► Includes a circularly polarized antenna facing out of the rear side. ► Read range of up to 1.5m (5ft), depending on the type and number of RFID tags. 	
Contact Jack Sheehan at Blue Star (800)354-9776 x3244				
1134-01-SO-MC65-LF-RFID (3rd party) * http://www.tsl.uk.com http://www.bluestarinc.com		Low Frequency (LF) RFID Reader 	<ul style="list-style-type: none"> ► Provides the ability to read and write to a wide variety of manufacturer specific transponders including NXP (Philips) HITAG, EM Microelectronic and Texas Instruments. ► Dual LF support at 125kHz and 134.2kHz ► Not compatible with MC67 	
Contact Jack Sheehan at Blue Star (800)354-9776 x3244				
1117-01-SO-MC65-RFID (3rd party) * http://www.tsl.uk.com http://www.bluestarinc.com		High Frequency (HF) RFID Reader 	<ul style="list-style-type: none"> ► Provides the ability to read and write to a wide variety of transponders at 13.56 MHz including ISO 15693,ICODE (I & II) and the complete Mifare family of ISO14443 (A&B) ► Not compatible with MC67 	
Contact Jack Sheehan at Blue Star (800)354-9776 x3244				
Misc				
Part Number	Picture	Description	Notes	Required Items
SG-MC5511110-01R		Rigid Holster with Belt Clip	<ul style="list-style-type: none"> ► Provides a secure place to store the terminal on the user's hip. ► The terminal is inserted with the screen toward the users body so that the display is protected. 	
SG-MC5521110-01R		Fabric Holster with Belt Clip		







<p>X6721DWSP (3rd party) *</p> <p>http://www.ultimacase.com</p>		<p>SoftTouch Case with D-rings for MC55/MC65/MC67</p> 	<ul style="list-style-type: none"> ► Elastic handstrap is adjustable with a rectangle ring for comfortable holding of the unit by users with a wide range of hand sizes. ► Elastic loop on each side for left or right handed user of stylus. ► Flap with snap at bottom for quick on/off. ► Two D-rings for shoulder strap attachment 	
<p>A1234ST (3rd party) *</p> <p>https://shilpitrading.com</p>		<p>Soft Wearable Holster</p>	<ul style="list-style-type: none"> ► Durable Ballistic Nylon Holster. ► Elastic side panels expand to accomodate varying device types and battery sizes. ► Compatible with MC55, MC6x, MC7x, and TC7x. ► Covered Belt Clip for quick on/off waist belt. ► Retaining strap at top to secure device in holster. ► Includes D-rings for optional shoulder strap use. ► Elastic loop on each side can be used for storing stylus. ► Can be used with optional Waist Belt for Holster (A1227ST) or Shoulder Strap (A1236ST) 	
<p>A1217ST (3rd party) *</p> <p>https://shilpitrading.com</p>		<p>Soft Wearable Holster with Shoulder Strap</p>	<ul style="list-style-type: none"> ► Leather-like material with smooth finish. ► Elastic side panels expand to accomodate varying device types and battery sizes. ► Compatible with MC55, MC6x, MC7x, and TC7x. ► Covered Belt Clip for quick on/off waist belt. ► Retaining strap at top to secure device in holster. ► Includes D-rings for use with included shoulder strap. ► Shoulder Strap is 3/8" wide and adjustable to 70" length. ► Elastic loop on each side can be used for storing stylus. ► Can be used with optional Waist Belt for Holster (A1227ST). 	









<p>A1216ST (3rd party) *</p> <p>https://shilpitrading.com</p>		<p>Soft Wearable Dual Holster with Shoulder Strap</p>	<ul style="list-style-type: none"> ► Leather-like material with smooth finish. ► Includes two pockets - one for device and another for cell phone, mobile payment unit or spare battery. ► Elastic side panels expand to accommodate varying device types and battery sizes. ► Compatible with MC55, MC6x, MC7x, and TC7x. ► Covered Belt Clip for quick on/off waist belt. ► Retaining strap at top to secure device in holster. ► Includes D-rings for use with included shoulder strap. ► Shoulder Strap is 3/8" wide and adjustable to 70" length. ► Elastic loop on each side can be used for storing stylus. ► Can be used with optional Waist Belt for Holster (A1227ST). 	
<p>O4925DWSP0S2 (3rd party) *</p> <p>http://www.ultimacase.com</p>		<p>Replacement Swivel Belt Clips for holsters</p> 		
<p>A1227ST (3rd party) *</p> <p>https://www.shilpitrading.com</p>		<p>Belt for Holster</p>	<ul style="list-style-type: none"> ► Belt is 2 inches wide ► Extends to 48 inches ► Quick on/off snap buckle 	
<p>21-138874-01R</p>		<p>Lanyard for Pistol Grip Trigger Handle (TRG5500-100R)</p>		
<p>KT-119150-03R (pack of 3) KT-119150-50R (pack of 50)</p>		<p>Replacement Stylus</p>	<ul style="list-style-type: none"> ► This is the stylus that ships with the unit. 	






STYLUS-00003-03R (pack of 3) STYLUS-00003-50R (pack of 50)		Tethered Stylus Kit	► Includes KT-119150-xxR Stylus and KT-12261-xxR Stylus Tether	
Stylus-00001-03R (pack of 3) Discontinued May 2013 Stylus-00001-10R (pack of 10) Discontinued		Spring Loaded Tetherable Stylus	► Does not include tether	
KT-152738-03R (pack of 3) KT-152738-50R (pack of 50) - Discontinued 12/2013		Replacement Stylus for MC55A0-HC (Health Care) unit	► Expected to be discontinued 6/2022 PMB 2960 ► This is the blue stylus that ships with the MC55A0-HC unit. ► Includes tether	
KT-122621-03R (pack of 3) KT-122621-50R (pack of 50)		Elastic Stylus Tethers	► Can be used to tether the stylus that ships with the MC55.	
SG-MC5523341-03R		Hand Strap	► Includes pin	
SG-MC5523341-01R		Hand Strap, Antibacterial	► Expected to be discontinued 6/2022 PMB 2960 ► For MC55A0 HC (Health Care) devices ► Includes pin	
N/A		Headset	Use a Bluetooth Headset. Wired headsets are not supported by the MC55/65/67.	

<p>B350-XT</p> <p>(3rd party) *</p> <p>http://www.blueparrott.com</p>		<p>BlueParrott Bluetooth Headset for voice directed applications</p>	<ul style="list-style-type: none"> ► Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired ► Not intended to support peer-to-peer communications (PTT) or VoIP calls. ► Provides 24 hours talk time. ► Works with StoneStreet Bluetooth stack. Will not function with Microsoft BT stack or voice applications that depend on the Microsoft BT stack. ► Allows the use of other BT devices (i.e. RS507 scanner or mobile printer) 	<ul style="list-style-type: none"> ► May require Bluetooth Wideband Speech CAB file from support site to enable StoneStreet BT stack wideband (16 KHz) audio support.
<p>3PTY-VXI-B350XT</p> <p>(Zebra orderable SKU)</p> <p>http://www.vxicorp.com</p>		<p>BlueParrott Bluetooth Headset for voice directed applications</p> 	<ul style="list-style-type: none"> ► Discontinued 10/2018, now use HS3100 series - PMB 10005 ► Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired ► Not intended to support peer-to-peer communications (PTT) or VoIP calls. ► Provides 24 hours talk time. ► Works with StoneStreet Bluetooth stack. Will not function with Microsoft BT stack or voice applications that depend on the Microsoft BT stack. ► Allows the use of other BT devices (i.e. RS507 scanner or mobile printer) ► Compatible with MC67 only ► Zebra Compatible certification for VDP application use with MC32. 	<ul style="list-style-type: none"> ► May require Bluetooth Wideband Speech CAB file from support site to enable StoneStreet BT stack wideband (16 KHz) audio support.
<p>3PTY-VXI-B250XTP</p> <p>(Zebra orderable SKU)</p> <p>http://www.vxicorp.com</p>		<p>BlueParrott Bluetooth Headset for voice directed applications</p> 	<ul style="list-style-type: none"> ► Discontinued 10/2018, now use HS3100 series - PMB 10005 ► Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired ► Not intended to support peer-to-peer communications (PTT) or VoIP calls. ► Provides 20 hours talk time. ► Works with StoneStreet Bluetooth stack. Will not function with Microsoft BT stack or voice applications that depend on the Microsoft BT stack. ► Allows the use of other BT devices (i.e. RS507 scanner or mobile printer) ► Compatible with MC67 only 	<ul style="list-style-type: none"> ► May require Bluetooth Wideband Speech CAB file from support site to enable StoneStreet BT stack wideband (16 KHz) audio support.
<p>3PTY-VXI-EXPWAYII</p> <p>(Zebra orderable SKU)</p> <p>http://www.vxicorp.com</p>		<p>BlueParrott Bluetooth Headset for voice directed applications</p> 	<ul style="list-style-type: none"> ► Discontinued 10/2018, now use HS3100 series - PMB 10005 ► Used to enable Voice Directed Picking (VDP) or Speech Applications in warehouse environments when the use of a wireless headset is desired ► Not intended to support peer-to-peer communications (PTT) or VoIP calls. ► Provides 8 hours talk time. ► Works with StoneStreet Bluetooth stack. Will not function with Microsoft BT stack or voice applications that depend on the Microsoft BT stack. ► Allows the use of other BT devices (i.e. RS507 scanner or mobile printer) ► Compatible with MC67 only ► Zebra Compatible certification for VDP application use with MC92, VC70, WT41 and MC32. 	<ul style="list-style-type: none"> ► May require Bluetooth Wideband Speech CAB file from support site to enable StoneStreet BT stack wideband (16 KHz) audio support.

K551011		Savox Bluetooth Remote Speaker/Mic (RSM)	<ul style="list-style-type: none"> ▶ Discontinued 3/2019, now order from Savox ▶ Easily scan and pair an MC55A or MC65 to RSM using the Stone Street Bluetooth stack (Driver required) ▶ Communicate with others over PTT Express. ▶ Rugged wireless speaker microphone ▶ Allows cable-free movement ▶ Familiar speaker microphone functions; PTT and volume buttons ▶ 2.5mm connector for earpiece or headset ▶ LED status indication ▶ High speaker volume ▶ Includes: <ul style="list-style-type: none"> - Savox RSM - Modular Wired earpiece - Wall Charger - USB Cable - Quick Start Guide - Carrying Strap 	Requires driver from Zebra support website
PSAK-UCM (3rd party) * http://www.portsmith.com		Portsmith USB Modem Adapter	<ul style="list-style-type: none"> ▶ Discontinued ▶ Connects to Single Slot USB cradle. Acts as USB Peripheral device to MC55/MC6X (USB host) ▶ Requires no separate power supply operates on power draw directly from the USB connection. ▶ Kit includes PSA1U1M adapter and three USB cables for connecting to a variety of devices. ▶ Requires software driver from http://www.portsmith.com ▶ Not compatible with Android versions of MC67 	CRD5500-1000UR and USB Mini A to Type B conversion cable 170573-000 (PortSmith cable included in kit) OR 25-108022-01R and USB A Receptacle to Type-B Plug conversion cable. This will also require MC55/MC6X Control Panel applet software to force MC55/MC6X in USB Host mode.
PS6U1M (3rd party) * http://www.portsmith.com		USB Modem Adapter	<ul style="list-style-type: none"> ▶ Discontinued ▶ Connects to device via Single Slot cradle or USB Cable ▶ Acts as USB Host device to MC55 (USB Peripheral) ▶ Requires driver for MC device from PortSmith website ▶ Not compatible with Android versions of MC67 	CRD5500-1000UR and 25-68596-01R OR 25-108022-01R
PSA1U1E (3rd party) * http://www.portsmith.com		Portsmith USB Ethernet Adapter 	<ul style="list-style-type: none"> ▶ Connects to MC55/MC65/MC67 via Single Slot USB cradle. Acts as USB Peripheral device to MC55/MC65/MC67 (USB host) ▶ Requires no separate power supply, has grounded wiring from both the USB and Ethernet ports, and operates on very low power draw directly from the USB connection. ▶ Molded end caps enable the adapter to be aligned side by side or top to bottom, for efficient use of desktop space and organization of cables. ▶ PSAK-UCE KIT includes: PSA1U1E adapter and three USB cables for connecting to a variety of devices. ▶ Requires software driver from http://www.portsmith.com 	CRD5500-1000UR and USB Mini A to Type B conversion cable 170573-000 (PortSmith cable included in kit) OR 25-108022-01R and USB A Receptacle to Type-B Plug conversion cable. This will also require MC55/MC6X Control Panel applet software to force MC55/MC6X in USB Host mode.

PS6U1UPE (3rd party) *		USB Ethernet Adapter 	<ul style="list-style-type: none"> ▶ Discontinued 8/2012, now use PSA1U1E ▶ Connects to MC55 via Single Slot USB cradle or USB Cable. Acts as USB Peripheral device to MC55 (USB host) 	CRD5500-1000UR and USB Mini A to Mini B conversion cable 170373-000 (PortSmith cable) OR 25-108022-01R and USB A receptacle to mini B conversion cable 190087-000 (PortSmith cable). This will also require MC55 Control Panel applet software to force MC55 in USB Host mode.
KT-137521-03R		Screen Protector (pack of 3)	<ul style="list-style-type: none"> ▶ For use with applications with high touch screen usage, Zebra recommends the use of a screen protector to minimize wear and tear. ▶ Screen protectors enhance the usability and durability of touch screen displays. 	
KT-67525-01R		Screen Protector (pack of 3)	<ul style="list-style-type: none"> ▶ Discontinued 6/26/12, now use KT-137521-03R ▶ For use with applications with high touch screen usage, Zebra recommends the use of a screen protector to minimize wear and tear. ▶ Screen protectors enhance the usability and durability of touch screen displays. 	
Additional Screen Protectors (3rd party) *		Additional Screen Protectors	<ul style="list-style-type: none"> ▶ NuShield AG™ - works well indoors under bright lights to minimize glare. ▶ NuShield AM™ - antimicrobial film is an antiglare film designed for hospitals, public kiosks, restaurants and POS terminals where transmission of disease is a primary concern. ▶ NuShield DayVue™ - antireflective film is the best choice for displays that are being used outdoors. 	
KT-88330-03R		ESD USB Adapter (3 pack)	<ul style="list-style-type: none"> ▶ Discontinued 9/2011 ▶ Provides ESD protection when connecting device to PC. 	
KT-88330-10R		ESD USB Adapter (10 pack)	<ul style="list-style-type: none"> ▶ Discontinued 11/2011 ▶ Provides ESD protection when connecting device to PC. 	
Power Cords/Power Supplies				
Part Number	Picture	Description	Notes	Required Items

CBL-DC-388A1-01		DC Power Cord	<ul style="list-style-type: none"> ► Used along with Power Supply PWR-BGA12V50W0WW to power Single Slot Cradles and SACX000 4-Slot Battery Charger. ► Cable length is 1.8 meters 	
PWR-BGA12V50W0WW		Power Supply	<ul style="list-style-type: none"> ► Used to power Single Slot Cradles and SACX000 4-Slot Battery Charger. ► 100-240 VAC, 12V, 4.16A, 50W ► Provides US DOE Level VI compliance for power efficiency. ► Replaces PWRS-14000-148R 	DC Line Cord (CBL-DC-388A1-01) and AC Line Cord (23844-00-00R)
KIT-PWR-12V50W		Power Supply Kit	<ul style="list-style-type: none"> ► Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01) 	AC Line Cord (23844-00-00R)
PWRS-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ► Discontinued 1/2017, now use PWR-BGA12V50W0WW and CBL-DC-388A1-01 - see PMB 2923 and PMB 2851 ► Replaces KT-14000-148R ► Used to power Single Slot Cradle and SACX000 4-Slot Battery Charger ► 100-240 VAC, 12VDC, 3.33A ► Energy Star Compliant 	23844-00-00R
50-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ► Discontinued 12/2007 - replaced by KT-14000-148R ► Used to power Single Slot Cradle and SACX000 4-Slot Battery Charger 	23844-00-00R
KT-14000-148R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ► Replaces 50-14000-148R ► Used to power Single Slot Cradle and SACX000 4-Slot Battery Charger ► Discontinued 12/2010 - now use PWRS-14000-148R 	23844-00-00R
CBL-DC-383A1-01		DC Line Cord	<ul style="list-style-type: none"> ► Used to power Snap-On USB/Charge Cable with Power Supply PWR-BUA5V16W0WW ► Cable length is 6 ft. 	
PWR-BUA5V16W0WW		Power Supply	<ul style="list-style-type: none"> ► Used to power Communication/Charge Cable Cups ► 100-240VAC, 5.4V, 3A, 16W ► Meets US DOE Level VI efficiency standard ► Replaces PWRS-14000-249R 	DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R)

PWRS-14000-249R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Discontinued 10/2016 in NALA and 1/2017 in EMEA/APAC - replaced by PWR-BUA5V16W0WW and CBL-DC-383A1-01 - PMB 2887. ▶ Replaces 50-14000-249R ▶ Used with Communication/Charge Cable Cups ▶ 100-240VAC, 5.4 VDC, 3A ▶ Energy Star Compliant 	50-16000-182R
50-14000-147R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Discontinued 12/2007 - replaced by 50-14000-249R ▶ Used with Communication/Charge Cable Cups 	50-16000-182R
50-14000-249R		Power Supply with integrated DC Cord	<ul style="list-style-type: none"> ▶ Replaces 50-14000-147R ▶ Used with Communication/Charge Cable Cups ▶ Discontinued 12/2010 - now use PWRS-14000-249R 	50-16000-182R
CBL-DC-382A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used with Power Supply PWR-BGA12V108W0WW to power 4-Slot Cradles. 	
50-16002-029R		DC Power Cord	<ul style="list-style-type: none"> ▶ Used with Power Supply PWRS-14000-241R to power 4-Slot Cradles. ▶ Discontinued 2/2017, now use CBL-DC-382A1-01 - PMB 2851 and 2933 	
PWR-BGA12V108W0WW		Power Supply	<ul style="list-style-type: none"> ▶ Used to power Four Slot Cradles ▶ 100-240 VAC, 12V, 9A, 108W ▶ Provides US DOE Level VI compliance for power efficiency. ▶ Replaces PWRS-14000-241R 	CBL-DC-382A1-01 and 23844-00-00R
PWRS-14000-241R		Power Supply	<ul style="list-style-type: none"> ▶ Replaces 50-14000-241R ▶ Used to power Four Slot Cradles ▶ 100-240VAC, 12VDC, 9A ▶ Energy Star Compliant ▶ Discontinued 2/2017, now use PWR-BGA12V108W0WW - PMB 2851 and 2933 	50-16002-029R and 23844-00-00R
50-14001-004R		Power Supply	<ul style="list-style-type: none"> ▶ Discontinued 12/2007 - replaced by 50-14000-241R ▶ Used to power Four Slot Cradles 	50-16002-029R and 23844-00-00R
50-14000-241R		Power Supply	<ul style="list-style-type: none"> ▶ Replaces 50-14001-004R ▶ Used to power Four Slot Cradles ▶ Discontinued 12/2010 - now use PWRS-14000-241R 	50-16002-029R and 23844-00-00R

23844-00-00R		AC Line Cord	► This AC Line Cord is for use in North America. See the AC Line Cords by Country TAG for comparable line cords to use in other countries.	
50-16000-182R		AC Line Cord	► Used with 50-14000-147R/50-14000-249R/PWRS-14000-249R/PWR-BUA5V16W0WW. ► This AC Line Cord is for use in North America. See the AC Line Cords by Country TAG for comparable line cords to use in other countries.	
Batteries				
Part Number	Picture	Description	Notes	Required Items
BTRY-MC55EAB00 BTRY-MC55EAB00-10 (10 pack) BTRY-MC55EAB00-50 (50 pack) BTRY-MC55EAB00-IN (for India)		Spare 1X Battery (2400 mAh)	► To be discontinued 8/2022 - PMB 2960 Rev B	
BTRY-MC55EAB02 BTRY-MC55EAB02-10 (10 pack) BTRY-MC55EAB02-50 (50 pack)		Spare 1.5X Battery (3600 mAh)		
BTRY-MC55EAB02-H BTRY-MC55EAB02-10H (10 pack) BTRY-MC55EAB02-50H (50 pack) BTRY-MC55EAB02-HI (for India) - discontinued 2/2019 - see PMB 10057		Spare 1.5X White Battery (3600 mAh)	► For MC55A0 HC (Health Care) devices ► To be discontinued 8/2022 - PMB 2960 Rev B	
KT-BTYMT-01R		Spare Battery for RFD5500 (2400 mAh)	► Battery for RFD5500 (RFID Trigger Handle Sled)	