

Series 7 Large Managed Network Switch

SIL 73816MP-10G

Industrial Gigabit PoE+ Managed Switches



OVERVIEW

The SIL 73816MP-10G is a robust fully managed layer 2 Switch, designed to operate efficiently in demanding environments.

This Industrial Gigabit PoE+ Managed Switch offers extensive connectivity options, with 16 x 10/100/1000Base-T ports, 8 x 1000Base-FX SFP slots, and 4 x 10G SFP+ slots.

The dual input design ensures dependable, uninterrupted operation. Additionally, the Switch is fanless, which minimizes noise and reduces the risk of dust and debris accumulation.

This Switch has low power consumption, ensuring cost-effective, efficient operation. The Industrial Gigabit PoE+ Managed Switch also boasts high reliability, making it an ideal choice for mission-critical applications.

The 73816MP-10G is a dependable solution for extending Ethernet over distance via fibre daisy chain. This will simplify installation and reduce costs, as it eliminates the need for separate power supplies for IP video cameras and wireless access points.

This rugged Switch has an extended temperature range for use in harsh environments, and is suitable for security, surveillance, manufacturing, transportation, oil and gas, power utilities, mining, and other outdoor applications.

Fully compliant to IEEE802.3af/at for Power-over-Ethernet over twisted pair cables, it also features a modular SFP slot for pluggable 1.25Gbps SFP transceivers.

Features

- 16 x 10/100/1000Base-T
- 8 x 1000Base-FX SFP slots + 4 x 10G SFP+
- 56Gbps Backplane bandwidth
- IEEE803.af/at compliant
- RJ45 supports auto MDI/MDI-X function
- Auto negotiation speed, half/full duplex
- Store and forward
- Max packet size: 10K bytes
- MAC address size: 16K
- Wide range power design (9~56VDC)
- Operating temperature (-40°C ~+75°C)
- Resettable fuse to protect against overcurrent
- Reverse Polarity Protection
- DIN Rail or wall mountable
- EFT protection for power line
- Ethernet ESD protection
- IP40 Protection
- Rugged

Copyright © SilverNet Limited. All rights reserved. All other company and product names may be trademarks of their respective companies. Whilst every effort is made to make sure the information shown is accurate, SilverNet Limited can not accept liability for any errors that may arise. No freedom to use information, patents, trademarks or other intellectual property rights is implied by the publication of this document. E&OE. SilverNet Limited reserve the right to change specifications and other information within this document without notice and your attention is brought to the fact that performance figures are under ideal conditions. Actual performance will depend on many environmental factors and it is recommended that a site survey is undertaken prior to installation. Please also note that this equipment may also be subject to local legislative restrictions. It is the end users responsibility to ensure that the installation complies with any such restrictions that are in force.



Distributed By:

Technical Specifications

Part No.	SIL 73816MP-10G
Ports	
Total number of ports	28
Gigabit Ethernet	16
Gigabit Fibre	8
10Gb Fibre	4
Number of PoE ports	16
Max output per port	30W
Performance	
Switch Bandwidth	56Gbps
MAC address size	16K
Processing type	Store and Forward
Time delay	<7µs
Jumbo Frames	10K bytes
Packet buffer space	12Mbit
Power	
Power input	9~56VDC, Redundant (2 Inputs Available)
Power consumption	10W Max
Standards	
Standards	G.8032 (ERPS) IEEE.802.3, IEEE802.3u, IEEE802.3z, IEEE802.3x, IEEE802.3ad, IEEE802.1p, IEEE802.1x, IEEE802.3ab, IEEE802.1Q, IGMP snooping
EMC	UKCA BS EN 55032:2015/A11:2020 UKCA BS EN IEC 61000-3-2:2019+A1:2021 UKCA BS EN 61000-3-3:2013/A2:2021 UKCA BS EN 55035:2017/A11:2020
EMI	FCC Part 15 Class A
EMS	IEC 61000-4-2 (ESD): Level 4 (8K/15K) IEC 61000-4-3 (RS): Level 3 (10V/m) IEC 61000-4-4 (EFT): Level 3 (1V/2V) IEC 61000-4-5 (surge): Level 3 (4KV/2KV) IEC 61000-4-6 (RF coupling): (10V/m) IEC61000-4-8 (Power Frequency Magnetic Field):Level 4 (30A/m)
LVD	UKCA BS EN IEC 62368-1:2020+A11:2020
ROHS	UKCA BS IEC 62321-1:2013, IEC 62321-3-1:2013 UKCA BS IEC 62321-4:2013+AMD1:2017, IEC 62321-5:2013 UKCA BS IEC 62321-6:2015, IEC 62321-7-1:2015 UKCA BS IEC 62321-7-2:2017, IEC 62321-8:2017
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32 0.5m
Vibration	IEC 60068-2-6
Physical	
Dimensions and weight	155mm x 128mm x 88mm ; 1.35kg
Enclosure	IP40 Protection, Aluminium Alloy
Mounting	DIN Rail, Wall mountable
Environment	
Operating Temperature	-40~+75°C (Storage -40~+85°C)
Humidity	5-90% (non-condensing)

Standard Features

STANDARD FEATURES

Physical Ports

- RJ45 with Auto MDI/MDI-X and Auto-negotiation
- SFP 100/1000Base-X
- SFP+ 10Gb

Power over Ethernet

- Complies with IEEE 802.3af / IEEE 802.3at Power over Ethernet (minimum 48-56VDC input required)
- IEEE 802.3af / 802.3at / devices powered
- Supports PoE power up to 30.8 Watts for each PoE port
- Auto detect powered device (PD)
- Circuit protection helps reduce power interference between ports
- Remote power feeding up to 100m
- PoE Management features
- IEEE 802.3af and IEEE 802.3at mode switch control
- Total PoE power budget control
- Per port PoE function enable/disable
- PoE Admin mode control
- PoE Port Power feeding priority
- Per PoE port power limit
- PD classification detection
- Temperature threshold control
- PoE Usage threshold control
- PD Alive check/reboot
- PoE schedule

Rugged Design

- IP40 Aluminium metal case protection
- DIN-rail and wall mount design
- 48V DC, redundant power with polarity reverse protect function
- Supports EFT protection 4K for power line
- Supports 4K Ethernet ESD protection
- 40°C~+75°C operating temperature

Security

- IP-Based Access Control List (ACL)
- MAC-Based Access Control List
- Source MAC / IP address binding
- DHCP Snooping to filter untrusted DHCP messages

Layer 2 Features

- Prevents packet loss with back pressure (Half-Duplex) and IEEE 802.3x pause frame flow control (Full-Duplex)
- Store and Forward architecture and runt/CRC filtering
- Storm control support
- Broadcast / Multicast / Unicast
- Supports VLAN
- IEEE 802.1Q Tagged VLAN
- Up to 255 VLANs groups, out of 4094 VLAN IDs
- Provider Bridging (VLAN Q-in-Q) support (IEEE 802.1ad)
- Supports Spanning Tree Protocol
- STP, IEEE 802.1D Spanning Tree Protocol
- RSTP, IEEE 802.1w Rapid Spanning Tree Protocol
- MSTP, IEEE 802.1s Multiple Spanning Tree Protocol, spanning tree by VLAN
- BPDU Guard
- Supports Link Aggregation
- 802.3ad Link Aggregation Control Protocol (LACP)
- Provides Port Mirror (1-to-1)
- Port mirroring to monitor the incoming or outgoing traffic on a particular port
- Loop protection to reduce the possibility of broadcast loops

Quality of Service

- Ingress shaper and egress rate limit per port bandwidth control
- 8 priority queues on all switch ports
- Traffic classification
- IEEE 802.1p CoS
- Typical network application
- Strict priority and Weighted Round Robin (WRR) CoS policies
- Supports QoS and In/Out bandwidth control on each port


Multicast

- Supports IGMP snooping v1, v2 and v3
- Supports MLD snooping v1 and v2
- Querier mode support
- IGMP snooping port filtering

Management

- Switch Management Interfaces
- Console / Telnet Command Line Interface
- Web switch management
- SNMP v1 and v2c switch management
- Built-in Trivial File Transfer Protocol (TFTP) client
- Firmware upload / download via HTTP / TFTP
- NTP (Network Time Protocol)
- Reset button for system reboot or reset to factory default

Dimension Diagrams

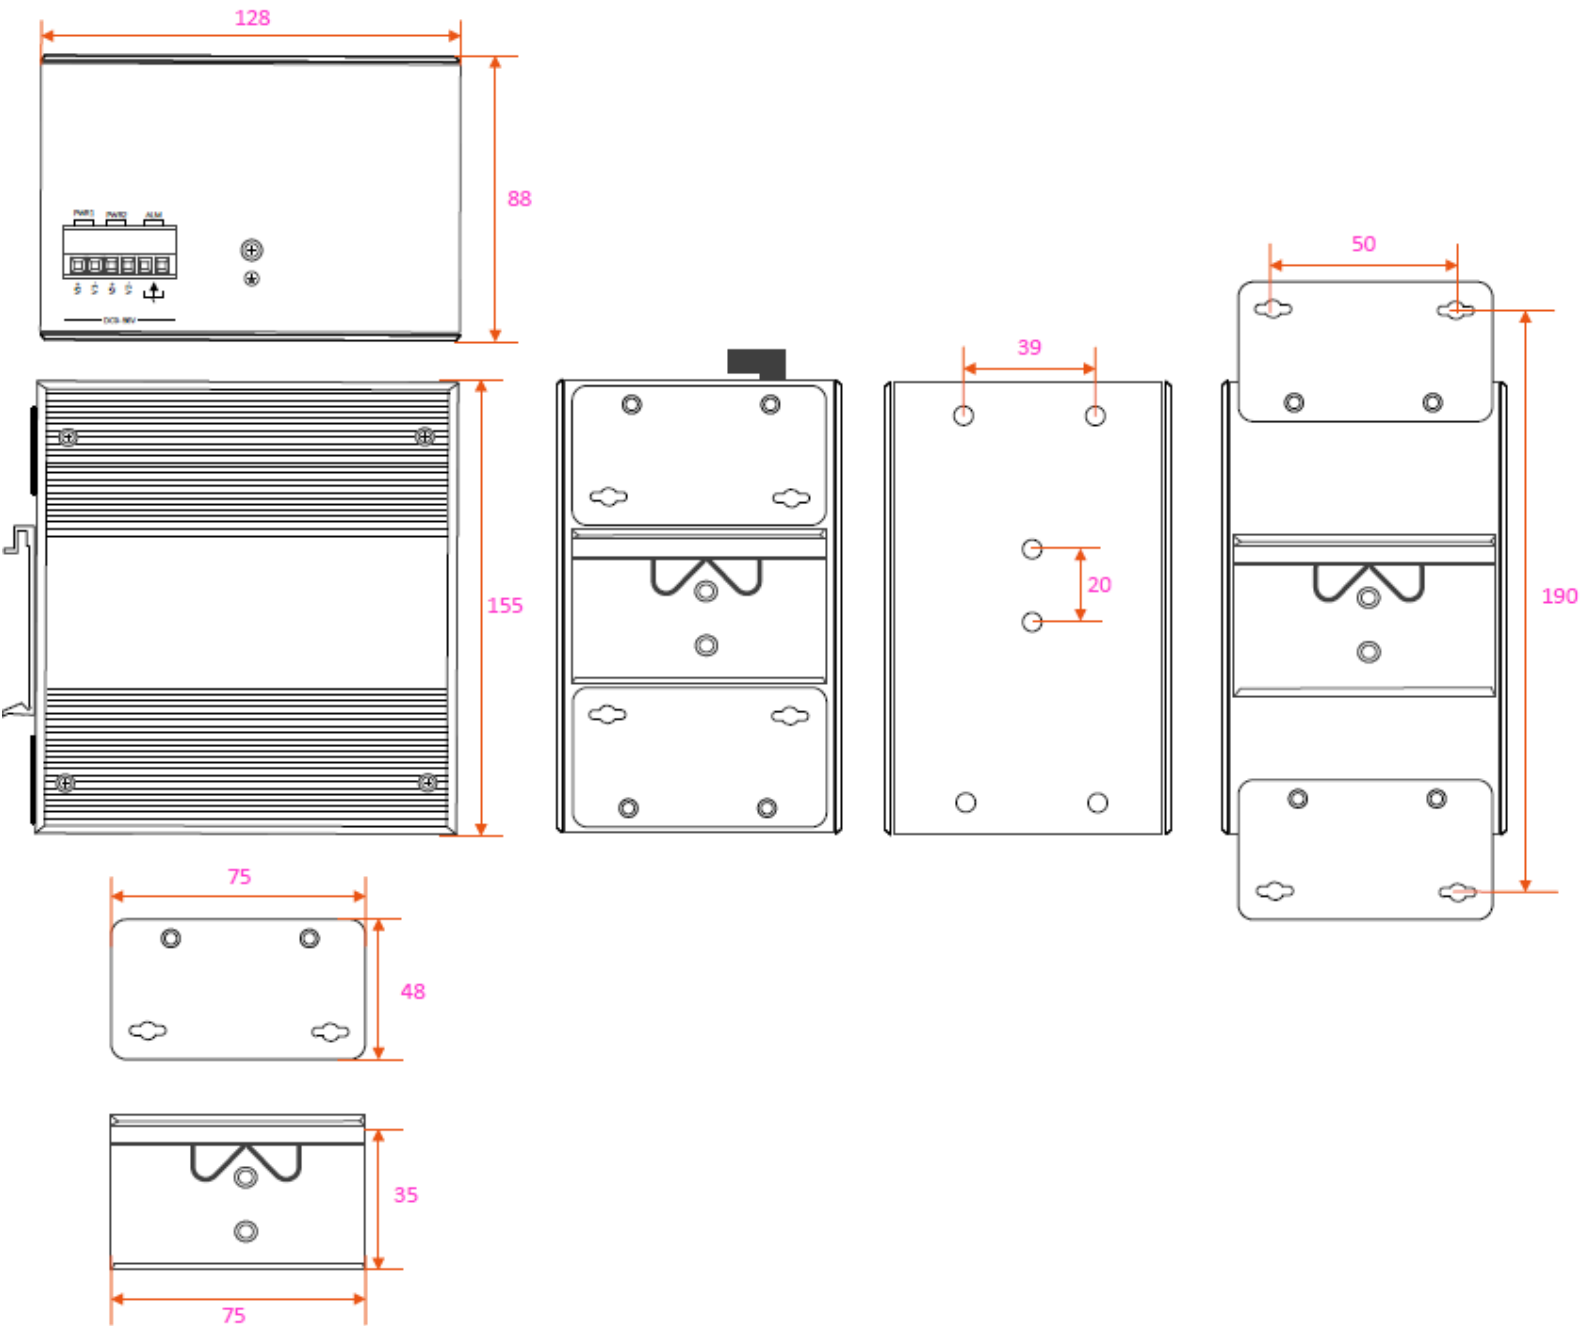


Additional Features



Redundant Ring

Fast Recovery for Critical Network Applications

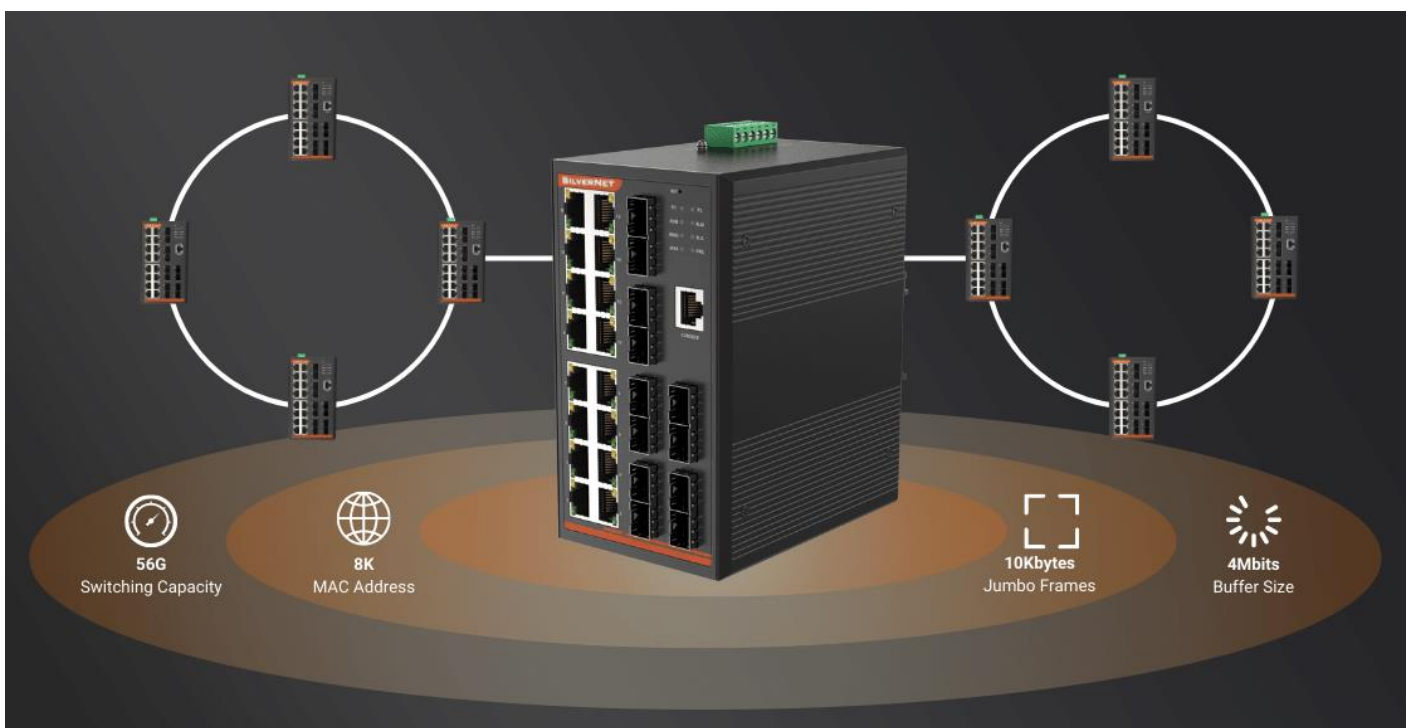

Part Numbers & Accessories

Managed Fibre Switches

Part Code	Description
SIL 73204MP	10/100/1000M 2Gx4GE POE+, two SFP slot, Excluding Power Supply
SIL 73208MP	10/100/1000M 2Gx8GE POE+, two SFP slot, Excluding Power Supply
SIL 73416MP	10/100/1000M 4Gx16GE POE+, four SFP slot, Excluding Power Supply
SIL 73024MP	10/100/1000M 24GE, 16 ports POE+, Excluding Power Supply

Power Supplies

Part Code	Description
SIL NDR-120-48 (48V 2.5A)	120W 48V 2.5A Industrial Din Rail Power Supply
SIL NDR-240-48 (48V 5A)	240W 48V 5A Industrial Din Rail Power Supply
SIL NDR-480-48 (48V 10A)	480W 48V 10A Industrial Din Rail Power Supply

1Gbps Fibre Transmission

Part Code	Description
SIL-SFP0-01-25-X850-0-5D	1G Multimode 850nm SFP, 550m
SIL-SFP0-01-25-X131-10XD	1G Singlemode 1310nm SFP, 10km
SIL-SFP0-01-25-X131-40XD	1G Singlemode 1310nm SFP, 40km
SIL-SFP0-01-25-X155-80XD	1G Singlemode 1550nm SFP, 80km
1Gbps BiDi	
SIL-SFP0-01-25-B131-10XD	1G SM 1310nm TX FP 10km with DDM, 1550nm RX
SIL-SFP0-01-25-B155-10XD	1G SM 1550nm TX FP 10km with DDM, 1310nm RX
SIL-SFP0-01-25-B139-10XD	1G SM 1310nm TX FP 10km with DDM, 1490nm RX
SIL-SFP0-01-25-B149-10XD	1G SM 1490nm TX FP 10km with DDM, 1310nm RX
SIL-SFP0-01-25-B131-40XD	1G SM 1310nm TX DFB 40km with DDM, 1550nm RX
SIL-SFP0-01-25-B155-40XD	1G SM 1550nm TX DFB 40km with DDM, 1310nm RX

10Gbps Fibre Transmission

Part Code	Description
SIL-08-10-X850-0-3D	10G Multimode 850nm SFP+, DDM, Duplex LC Connector, 300m
SIL-08-10-X131-02XD	10G Multimode 1310nm SFP+, DDM, Duplex LC Connector, 220m
SIL-08-10-X131-10XD	10G Singlemode 1310nm SFP+, DDM, Duplex LC Connector, 10km
10Gbps BiDi	
SIL-08-10-B127-10XD	10G SM SFP+ 1270nm TX FP 10km with DDM, Simplex LC Connector, 1330nm RX
SIL-08-10-B133-10XD	10G SM SFP+ 1330nm TX FP 10km with DDM, Simplex LC Connector, 1270nm RX
SIL-08-10-B127-40XD	10G SM SFP+ 1270nm TX FP 40km with DDM, Simplex LC Connector, 1330nm RX
SIL-08-10-B133-40XD	10G SM SFP+ 1330nm TX FP 40km with DDM, Simplex LC Connector, 1270nm RX