



DATA SHEET

Micro HDMI[®] to HDMI[®] Dongle Adapter Converter

This adapter is a great addition to your existing HDMI Adapter Ring.

OVERVIEW

This Micro HDMI to HDMI Dongle Adapter Converter is a great addition to your existing HDMI Adapter Ring—an easy and convenient solution for connecting a micro HDMI port to an HDMI enabled device in your home or office. This adapter carries a digital video signal, supporting up to a 4K resolution and meets the requirements for high performance applications.

Avoid frustration by simply plugging the adapter into your computer, then attach it to the existing HDMI cable from your monitor or projector. The portable, compact design also makes it easy to carry in a laptop bag when traveling or on the go.

Easily attach this Micro HDMI Dongle Adapter to any of the following [HDMI Adapter Rings](#).

FEATURES

- Adapts a micro HDMI output to HDMI, so no need to purchase a new monitor
- Dongle style adapter reduces strain, prolonging the life of the port
- Plug and play, so no additional software or drivers needed
- Adapter supports up to a 4K video resolution, so meeting attendees will be able to see the displayed content for improved comprehension and detailed decision making

ITEM	DESCRIPTION
------	-------------

C2G30067	Micro HDMI to HDMI Dongle Adapter Converter (with eyelet)
C2G30068	Micro HDMI to HDMI Dongle Adapter Converter (without eyelet)

SIGNAL SPECIFICATIONS

- Testing: 100% Functional Test at 4K/30Hz

ELECTRICAL SPECIFICATIONS


- Conductor Resistance: at 20°C, 32AWG: 588Ω/KM;
34AWG: 959Ω/KM
- Voltage Rating: 30V
- Insulation Resistance: 10 Ω/KM min at 20°C DC 500V
- Dielectric Strength: AC 500V/1 Minute No Breakdown

PHYSICAL SPECIFICATIONS

- Temperature Rating: 80°C
- Minimum Bend Radius: 25mm (about 0.98 in)
- Cable Jacket Rating: VW-1
- Tensile Strength: Unaged: 1500psi; Aged: 70% min.

PHYSICAL CHARACTERISTICS

- Connector 1: HDMI Female; Solder Type, Contacts: Brass, Gold Flash, Housing: LCP, Black, Shell: Nickel Plated
- Connector 2: micro HDMI; Solder Type, Contacts: Brass, Gold Flash, Housing: LCP, Black, Shell: Nickel Plated
- Adapter Hood: Molded Black (Pantone/#Black 6C) PVC
- Color Band: Orange; 12 x 1.5mm (about 0.06 in)
- Jacket Material: PVC
- Jacket Thickness: 0.51mm (about 0.02 in) AVG
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2

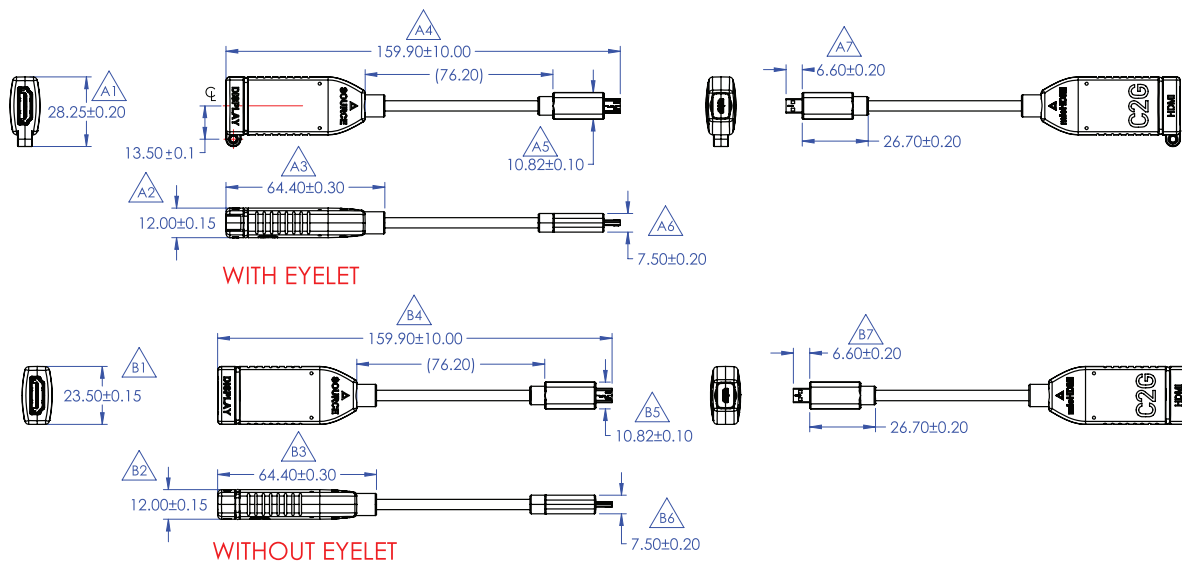

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY

USA 800.506.9607 | c2g.com | legrandav.com | customer-service@c2g.com

EMEA +31 495 580 840 | c2g.com/uk | legrandav.com | c2g.emea@av.legrand.com

©2022 Legrand AV Inc. 220627 Rev A 9/22 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.