

# **ATEM Television Studio** HD8



ATEM Television Studio HD8 is a compact live production switcher with built in broadcast control panel. Get a fully featured broadcast quality live production studio with 8 standards converted 3G-SDI inputs, built in streaming, master recorder, multiview, USB webcam support, DVE, 4 ATEM Advanced Chroma Keyers, media players, talkback, 4 way Ethernet switch and optional internal cloud media storage.

£2,515

### Connections

#### **SDI Video Inputs**

8

## **SDI Video Outputs**

12

#### **SDI Rates**

1.5G, 3G

## **HDMI Video Outputs**

1

### **Total Audio Inputs**

2 x XLR balanced analog audio,

1 x BNC 32 Ch MADI digital audio,

2 x RCA stereo analog audio,

1 x 5 pin XLR Talkback.

## **Total Audio Outputs**

4 x 1/4 inch Jack analog audio, 1 x BNC 64 Ch MADI digital audio, up

to 50 active,

1 x 5 pin XLR Talkback.

### **SDI Audio Inputs**

4 Ch embedded audio on all SDI inputs.

#### **SDI Audio Outputs**

2 Ch embedded audio on all SDI outputs.

#### **Timecode Connections**

1 x BNC In, 1 x BNC Out.

#### Reference Input

1 x BNC In, 1 x BNC Out. Tri-Sync or Black Burst.

### Video Input Re-Sync

On all 8 inputs.

## Frame Rate and Format Converters

On all 8 inputs.

## **SDI Aux Outputs**

2

#### **SDI Program Outputs**

## **Webcam Output**

2 x USB-C supporting 720p or 1080p at PGM frame rate.

## **Total Multi Views**

1 x 3G-SDI

1 x HDMI

#### Remote

RJ12 supports RS-422

### Control Panel Connection

Ethernet. Direct connection between panel and chassis, or via network.

#### Internal Timecode Generator

Yes

## **Talkback**

RJ45 for 3rd party talkback systems.

### **Tally Output**


Added via ethernet connection to Blackmagic Design GPI and Tally Interface product. (Not included).

### **Ethernet**

4 x RJ45 with internet network switch. Supports 10/100/1000 BASE-T.

### Computer Interface

2 x USB-C supports USB 2.0 for external drive recording, webcam out, software control, software updates and switcher connection.

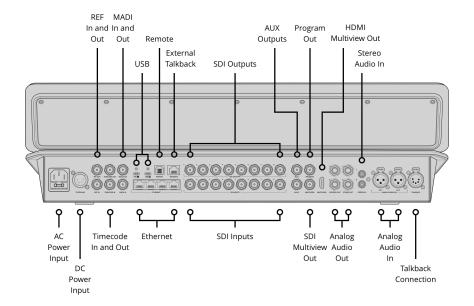

### Standards

**SD Video Standards** 

None

1

**HD Video Input Standards** 

720p50, 720p59.94, 720p60 1080i50, 1080i59.94, 1080i60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60 **SDI Compliance** 

SMPTE 292M, SMPTE 296M, SMPTE 424M, SMPTE 425M level A and B.

**Video Sampling** 

4:2:2

**Color Precision** 

10-bit.

Color Space

**REC 709** 

**SDI Auto Switching** 

Automatically detects between 1.5G-SDI and level A or level B 3G-SDI.

## **Product Specifics**

Number of Mix Effects Rows	Source Select Bus	Fader Bar
1	1	1
Direct Cross Points	Dedicated Macro Buttons	Record Buttons
10	10 plus shift 10	2
Shifted Cross Points	Transition Type Buttons	Stream Buttons
20	5	2
Crosspoint Button Type	Transition Rate	DSK Transition Selectors

Tri-Color LED Set via system LCD menu display

**Crosspoint Label**6 rows 24 character LCD

8

Preview Transition AUX Buttons

12

Fade to Black Buttons

1

System LCD Displays

1

Numeric Keypad

1

3 Axis Joystick

1

**Upstream Keyers** 

4

**Downstream Keyers** 

2

**Advanced Chroma Keyers** 

4

SuperSource

7

DVEs

2

Linear/Luma Keyers

7

Transition Keyer (Stinger/DVE)

1 Stinger, 1 DVE.

**Total Number of Layers** 

8

**Pattern Generators** 

7

**Color Generators** 

2

**Control Panel** 

Integrated panel with full control of

switching and settings.

**Routable Windows** 

16

**Windows Source Labels** 

Yes

Tally

Red for program and green for

preview indication.

**Talkback Support** 

Yes

Mix Minus Support

Yes

## Streaming

## **Direct Streaming**

Supports direct live streaming using Real Time Messaging Protocol (RTMP) over ethernet or a shared internet connection over USB-C.

## Recording

## **Direct Recording Video and Audio**

USB-C expansion port can record directly to external media.

## Video Recording

Program recorded as a H.264 .mp4 file at the streaming quality setting and at the ATEM video standard with AAC audio.

## Media Format

Supports media formatted ExFAT (Windows/Mac). APFS or HFS+ (Mac).

## Multi View Monitoring

### **Multi View Monitoring**

1 x multi view via SDI and HDMI configurable to 16, 13, 10, 7 or 4 up views. Includes monitoring of Program, Preview, Inputs, Media Players, DSKs, SuperSource, Clean Feed with optional labels and audio meters.

### Multi View Video Standard

HD

## **Display Minimum Resolution**

1366 x 768

## Media Player

### Media Players

2

#### Channels

Fill and key for each media player.

## Media Pool Still Image Capacity

20

## Media Pool Still Image Format

PNG, TGA, BMP, GIF, JPEG and TIFF.

### **Media Pool Clip Capacity**

2 x up to 1080p60.

## Media Player Clip Length in 720 HD

400 frames.

## Media Player Clip Length in 1080 HD

200 frames.

### Media Pool Video File Format

TGA sequence.

#### Media Pool Audio File Format

WAV, MP3 and AIFF.

## Processing

## **Processing Delay**

< 10 lines when genlocked and in the same format as the switcher.

#### **Audio Mixer**

58 Channel mixer. Selectable On/Off/Audio-Follow-Video. Level and Peak metering.

Master gain control.
6 band parametric EQ, Dynamics including Expander, Gate,
Compressor and Limiter.

#### Camera Control

When used with most Blackmagic Design cameras, ATEM can control focus, iris and zoom of compatible lenses and camera settings including gain, white balance, tint, shutter, ND filter, color corrector, tally and record start/stop.

### **Down Conversion**

None

### Software

#### **Control Panel Included**

ATEM Software Control Panel included free for Mac 12.0 Monterey, Mac 13.0 Ventura or later. and Windows 10 or 11.

## **Software Updates**

Using USB or Ethernet connection directly connected to Mac OS or Windows computers. Includes ATEM Setup Utility.

## **Operating Systems**



Mac 12.0 Monterey, Mac 13.0 Ventura or later.



Windows 10 and 11.

## Power Requirements

## **Power Supply**

1 x Internal 100 - 240 AC 50/60Hz with IEC C14 socket. 1 x 4 pin XLR 12V DC In for external power supply or battery use.

## **Power Usage**

100 W max.

## Physical Specifications







## Physical Installation

## **Physical Installation**

Desktop or in-desk mount.

## **Environmental Specifications**

## **Operating Temperature**

0° to 40° C (32° to 104° F)

## Storage Temperature

-20° to 60° C (-4° to 140° F)

## **Relative Humidity**

0% to 90% non-condensing

What's Included
ATEM Television Studio HD8 Welcome wallet with QR code for software download
Warranty
12 Months Limited Manufacturer's Warranty.
All items on this website are copyright Blackmagic Design Pty. Ltd. 2024, all rights reserved. All trademarks are property of their respective owners. MSRP excludes VAT and local shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. Privacy Policy
Blackmagic Design Authorized Reseller