





# Installation Guide


## 1. Package Contents




1 × Switch




1 × Power Cord



1 × Rack mount kit





1 × Power adapter



1 × Installation guide


## 2. Hardware Introduction

### • 2.1 Front Panel

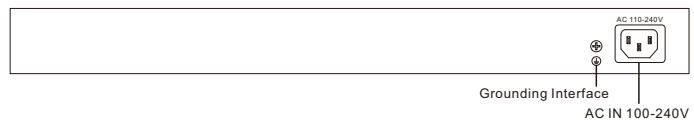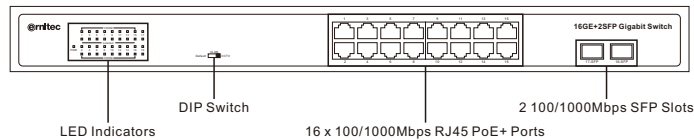


DIP Switch Description	
Default	The transmission distance of PoE port can be up to 100m with 100Mbps.
VLAN	All downlink ports are isolated from each other, but can communicate with uplink ports.
CCTV	CCTV mode is to ensure voice and video applications remain clear and lag-free.
LED Light	
PWR (Power indicator)	Off: the device is power off or failed On: the device power on is normal
Link/Act Indicator	Off: ports link down On: ports link up Blinking: data on TX/RX
1000Mbps indicator	Off: The negotiate speed is 10/100Mbps, not 1000Mbps On: The negotiate speed is 1000Mbps and ports link up Blinking: The negotiate speed is 1000Mbps and data on TX/RX

## 3. Hardware Installation

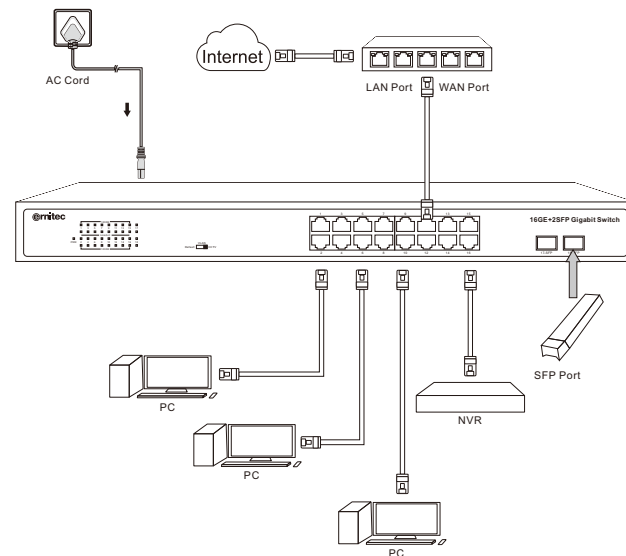

## 4. Installation

### • Rack-mounted installation

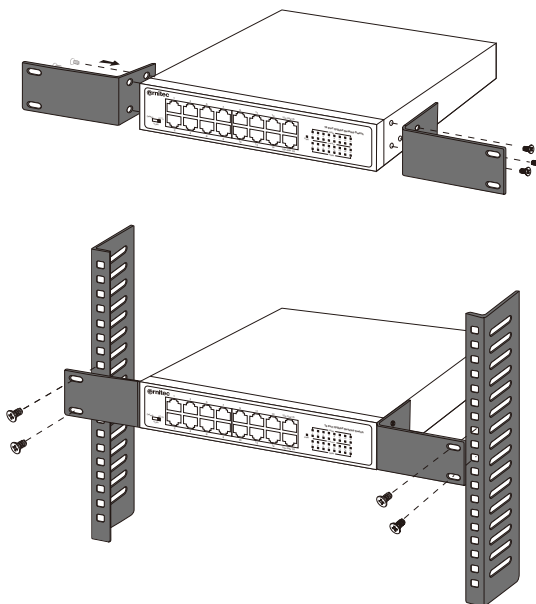

## Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	
Dealer Signature	

- If the product defects within three months after purchase, we will provide you a new product of the same model.
- If the product defects within the three-year warranty period, we will provide the professional maintenance service.
- Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
- Any other defects that are not caused by workmanship or product quality, such as natural disaster, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card losing will disqualify the product from limited warranty.