



## M10

Mobile Computers

## Features

### Comprehensive data capture.

The M10 Pilot Pro can be integrated with a variety of data capture options including Mega Pixel 1D/2D barcode Comprehensive data capture. The M10 can be integrated with a variety of data capture options including Mega Pixel 1D/2D barcode scanning, NFC RFID reading, fingerprint recognition and GPS/Beidou/GLONASS.

### Versatile connectivity.

With dual band 802.11 a/b/g/n/ac WiFi and 4G/3G/2G support, the M10 keeps you connected. Further optimizing this, the dual SIM option allows you to use the most suitable provider no matter where you are. It's a match for any leading consumer-brand mobile phone experience.

### Powerful performance.

The Android 11.0 operating system helps you get more from your mobile computer. It's intuitive, fast and tailored to you and your choice of software, applications and operational use. A 2.0GHz octacore processor keeps you running even smoother.

### Long Lasting Battery.

The M10 is equipped with a 4800mAh battery. Supplemented by a low-power design, the usage time is significant. The device is so power-efficient that you won't need to change the battery to operate well beyond a standard shift. To top it off, it supports fast-charging via its Type-C port.

### Android Enterprise Recommended.


The M10 is the first Newland unit to be Android Enterprise recommended. Additionally, GMS services are included.

### Antimicrobial Casing.

With healthcare in mind, the M10 features an antimicrobial casing that is built to resist even the harshest cleaning agents.

### Biometric Security.

The M10 has fingerprint biometrics for extra security and a faster login. Positioned on the back of the device, the device can be comfortably unlocked with one hand without having to press the front of the screen.

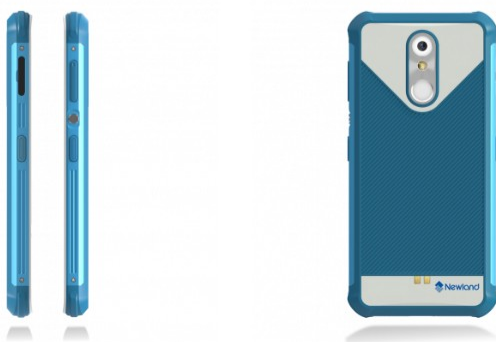

## Suggested industries



Retail



Logistics



Hospitality



Healthcare

# M10 Technical specifications

## Data Capture

1D	All major 1D symbologies
2D	All major 2D symbologies

## Performance

Operating System	Android 11.0 - GMS, Android Enterprise Recommended (AER)
Processor	2.0 GHz octa-core 64-bit
Memory RAM	4GB
Memory Flash	64GB
Memory Storage Expansion (max.)	TF card (max 128GB) slot

## Physical

Audio Jack	Type-C earphone via Type-C USB Port
Battery Type	3.8V, 4800 mAh
Camera	Front Camera: 2 megapixels, fixed focus; Rear camera: 13 megapixels, auto focus, with LED flashlight
Dimensions (mm)	157 x 76.3 x 12.6mm
Display	5.7" (1440x720) 18:9, 420 Nits
Expansion Slot	TF card slot (max. 128GB); Nano+Nano or Nano+ TF
Interfaces	support Type-C Earphone Type-C 2.0 OTG
Keypad	5 keys (side keys included)
Notifications	Vibrator, speaker and multi-color LEDs
Power Supply Input	AC110 ~ 220V, 50~60Hz
Power Supply Output	Quick Charger (Output: DC5V/7V/9V, 1.67 A)
Sensors	Light & Proximity sensor, magnetic sensor, gyroscope sensor
Touch Panel	Capacitive touch screen, Gorilla® Glass
Weight	231g (including battery)

## Housing

Antimicrobial housing	Escherichia coli, Staphylococcus aureus
-----------------------	---

## Wireless

WWAN RADIO	2G: GSM/GPRS/EDGE (850/900/1800/1900MHz); 3G: WCDMA (B1, B2, B5, B8); CDMA 1X/EV-D0 (BC0); TDSCDMA(B34, Band39); 4G: TD-LTE (B34, B38, B39, B40, B41); FDD-LTE (B1,B2,B3,B5,B7,B8,B20,B28)
WLAN RADIO	IEEE 802.11 a/b/g/n/ac, 2.4GHz and 5GHz
WPAN RADIO	Bluetooth 5.0
RFID	13.56MHz RFID: 15014443NB, 15015693, 15018000-3, MI FARE, Felica RF, Kovio, NFC Forum Type 1-4 tags
GPS	GPS (AGPS), Beidou, GLONASS, Galileo

## Environmental

Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Storage Temperature	-30°C to 60°C (-22°F to 140°F)
Humidity	5% to 95% (non-condensing)

### Newland EMEA HQ

+31 (0) 345 87 00 33

[info@newland-id.com](mailto:info@newland-id.com)

[newland-id.com](http://newland-id.com)

Feel free to contact us or a partner near you

visit [newland-id.com/partners](http://newland-id.com/partners)

Specifications are subject to change without notice

© Newland EMEA 2023, all rights reserved

# M10 Technical specifications

Electro Static Discharge (ESD)	±12kV (air discharge); ±8kV (direct discharge)
Drop	1.5m drops to concrete (BG/T 2423.8-1995 PART2), 1.22m drops to concrete MIL-STD-81 0G
IP Rating	IP67
Accessories	
Optional	AC adapter, USB C cable, single-slot charging cradle, 4-slot charging cradle, TPU Boot
Software	
MDM (certified)	Ndevor, SOTI, Airwatch, VMWare Workspace ONE UEM
Warranty	
Standard	2 years