


### Overview

#### HP Pro SFF 290 G9 Desktop PC

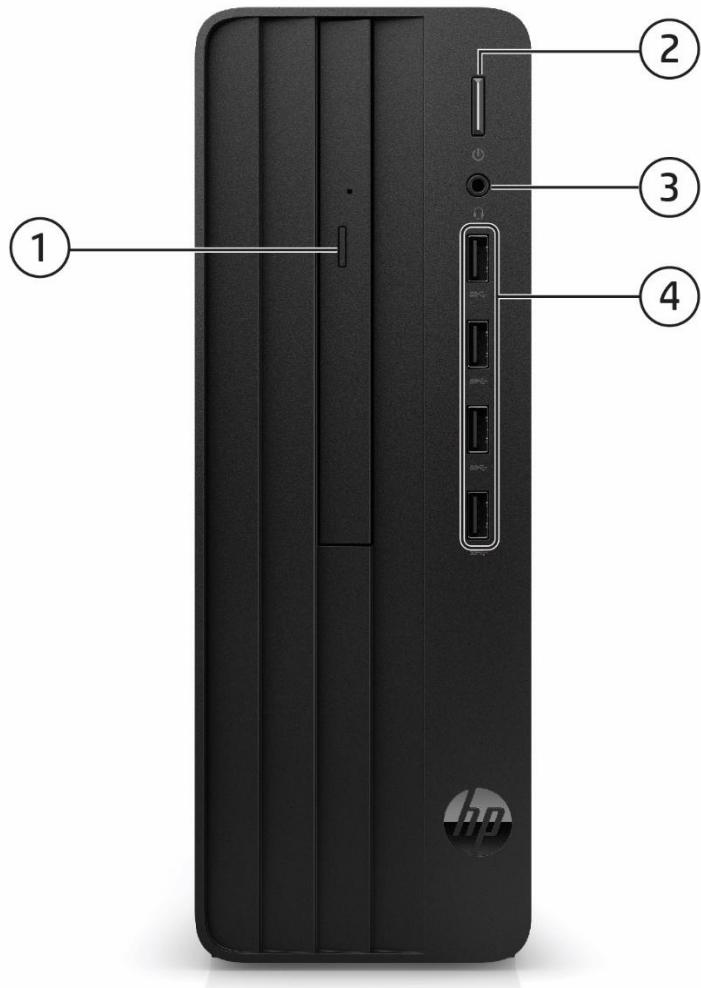

1. Slim-height Bay - supporting an optical disk drive (optional)
2. Power Button
3. Microphone/Headphone Combo Jack
4. (4) SuperSpeed USB 5Gbps signaling rate Ports<sup>1</sup>

#### Not shown

##### Slots

- (1) PCI Express4.0 x16
- (1) PCI Express3.0 x1
- (1) M.2 for WLAN
- (1) M.2 2230/2280 storage


1. SuperSpeed USB 5Gbps = USB3.2 Gen1

##### Bays

- (1) 3.5"
- (1) 9.5mm internal optical drive bay

### Overview

#### HP Pro SFF 290 G9 Desktop PC

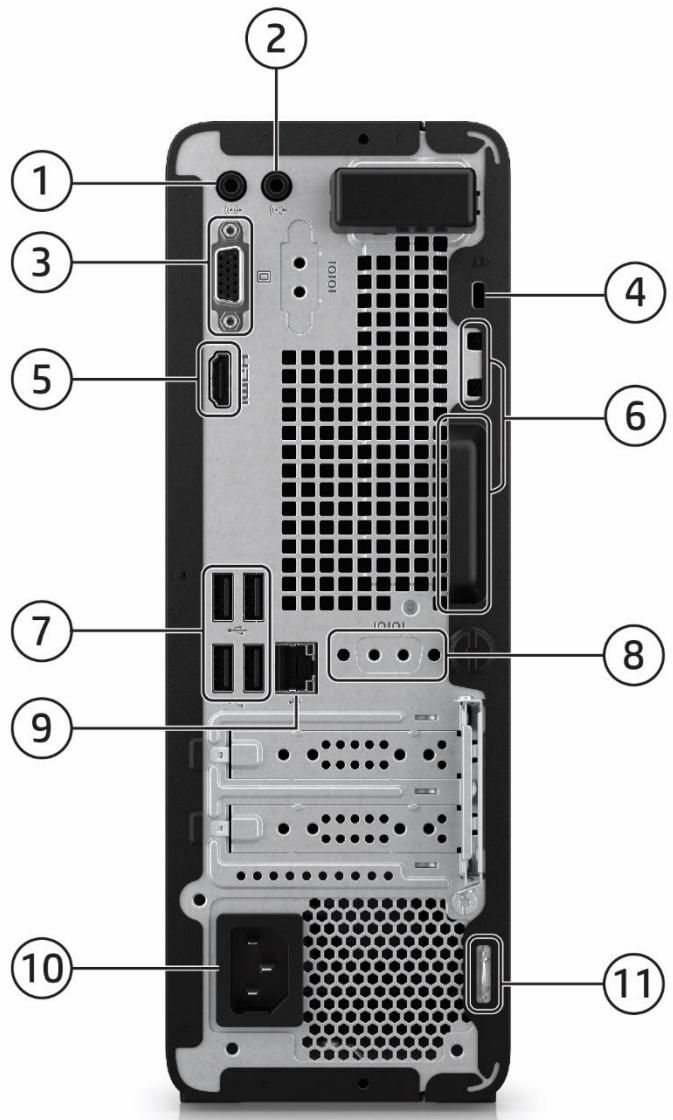

1. Audio Line out	6. Integrated accessories cable lock
2. Audio Line in	7. (4) USB 2.0 ports
3. VGA Port <sup>1</sup>	8. Serial port (optional)
4. Standard lock slot	9. RJ-45 Network Connector
5. HDMI Port <sup>1</sup>	10. Power Cord Connector
	11. Padlock Loop

#### Not Shown

Parallel Port (Optional via PClex1 slot)

4 Serial Port (Optional via PCIe slot)

Intrusion Sensor (Optional)

1. Port will be covered up when configured with processor which is without internal graphics.

#### AT A GLANCE

### Overview

#### AT A GLANCE

- Windows 11 Pro 64, Win 11 Home 64, Win 11 Pro 64 Downgrade (Win 10 Pro 64)<sup>1</sup> or FreeDOS.
- Intel® Intel® H670 chipset supporting up to Intel® 13<sup>th</sup> processors featuring Intel® UHD Graphics.
- Supports an optional discrete graphics card.
- Integrated 10/100/1000 Ethernet Controller or ac 2x2 +Bluetooth 5 M.2 2230 PCI-e+USB WW<sup>3</sup> or 802.11ac (1x1) Wi-Fi® and Bluetooth® 4.2 Combo<sup>3</sup> or Realtek 8852BE Wi-Fi6 +BT5.2 Screw WLAN.
- Up to 64GB DDR4-3200 Unbuffered Memory (UDIMM).
- Independent monitor support via VGA and HDMI interfaces.
- TPM 2.0 support (firmware).
- Supports both Hard Disk Drives and SATA TLC / PCIe® NVMe™ M.2 SSD or PCIe® NVMe™ TLC M.2 SSD.
- 8 USB Ports (including 4 SuperSpeed USB 5Gbps ports).
- 180W 85%/ 90% HE power supply and 240W 92% HE power supply<sup>1</sup>.
- Security cable lock supported (sold separately).
- Intrusion sensor supported (optional).
- Optional HP Care Packs available; terms and conditions vary by country; certain restrictions and exclusions apply<sup>2</sup>.

1. Available on select skus only.

2. 180W 85%/90% available in select regions only.

3. HP Care Packs sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit [www.hp.com/go/cpc](http://www.hp.com/go/cpc). HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

**NOTE: See important legal disclosures for all listed specs in their respective features sections.**

### Standard Features and Configurable Modules

#### OPERATING SYSTEMS

##### Preinstalled

- Windows 11 Pro<sup>1</sup>
- Windows 11 Home - HP recommends Windows 11 Pro for Business<sup>1</sup>
- Windows 11 Home Single Language - HP recommends Windows 11 Pro for Business<sup>1</sup>
- Windows 11 Pro (preinstalled with Windows 10 Pro Downgrade)<sup>1,2</sup>
- FreeDOS

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

2. This system is preinstalled with Windows 10 Pro software and also comes with a license for Windows 11 Pro software and provision for recovery software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

#### PROCESSORS\*

##### Intel® Celeron® Processors<sup>1,2,3</sup>

CPU Intel Celeron G6900 Dual Core 3.4GHz 3200MHz 46W (3.4GHz, 4MB cache, 2 cores)

##### Intel® Pentium®<sup>1,2</sup>

CPU Intel Pentium Gold G7400 Dual Core 3.7GHz 3200MHz 46W (3.7GHz, 6MB cache, 2 cores)

##### Intel 12<sup>th</sup> Processors

##### Intel® Core™ i3<sup>1,2,3</sup>

CPU Intel Core i3-12100 4C 3.3GHz 3200MHz 60W (3.3GHz, turbo up to 4.3GHz, 12MB cache, 4 cores)

##### Intel® Core™ i5<sup>1,2,3</sup>

CPU Intel Core i5-12400 6C 2.5GHz 3200MHz 65W (2.5GHz, turbo up to 4.4GHz, 18MB cache, 6 cores)

CPU Intel Core i5-12500 6C 3.0GHz 3200MHz 65W (3.0GHz, turbo up to 4.6GHz, 18MB cache, 6 cores)

##### Intel® Core™ i7<sup>1,2,3</sup>

CPU Intel Core i7-12700 12C 2.1GHz 3200MHz 65W (2.1GHz, Up to 4.8GHz with Intel® Turbo Boost<sup>4</sup>, 25MB cache, 12 cores)

##### Intel 13<sup>th</sup> Processors

##### Intel® Core™ i3<sup>1</sup>

CPU Intel Core i3-13100 4C 3.4GHz 3200MHz 60W (3.4GHz, turbo up to 4.5GHz, 12MB cache, 4 cores)

##### Intel® Core™ i5<sup>1</sup>

CPU Intel Core i5-13400 10C 2.5GHz 3200MHz 65W (2.5GHz, turbo up to 4.6GHz, 20MB cache, 10 cores)

CPU Intel Core i5-13400F 10C 2.5GHz 3200MHz 65W (2.5GHz, turbo up to 4.6GHz, 20MB cache, 10 cores)

CPU Intel Core i5-13500 14C 2.5GHz 3200MHz 65W (2.5GHz, turbo up to 4.8GHz, 24MB cache, 14 cores)

CPU Intel Core i5-13600 14C 2.7GHz 3200MHz 65W (2.7GHz, turbo up to 5.0GHz, 24MB cache, 14 cores)

##### Intel® Core™ i7<sup>1</sup>

CPU Intel Core i7-13700 16C 2.1GHz 3200MHz 65W (2.1GHz, Up to 5.2GHz with Intel® Turbo Boost<sup>2</sup>, 30MB cache, 16 cores)

### Standard Features and Configurable Modules

1. Your product does not support Windows 8 or Windows 7. In accordance with Microsoft's support policy, HP does not support the Windows® 8 or Windows 7 operating system on products configured with Intel 8th generation and forward processors or provide any Windows® 8 or Windows 7 drivers on <http://www.support.hp.com>
2. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.
3. In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>.
4. Intel® Turbo Boost technology requires a PC with a processor with Intel Turbo Boost capability. Intel Turbo Boost performance varies depending on hardware, software and overall system. See <http://www.intel.com/technology/turboboost> for more information.

**\*NOTE:** Not all processors are available; it varies by version.

### Standard Features and Configurable Modules

#### CHIPSET

Intel® H670 Chipset

#### GRAPHICS

##### Integrated<sup>1,2</sup>

Intel® UHD

Graphics 770 (integrated on 13<sup>th</sup> Core i7-i5 processors)

Intel® UHD

Graphics 730 (integrated on 13<sup>th</sup> Core i5-i3 processors)

Graphics 710 (integrated on Pentium and Celeron)

##### Discrete Graphics

NVIDIA® Quadro® T400 (4 GB GDDR6 dedicated)

AMD Radeon™ RX 6300XT Graphics (2 GB GDDR6)

1. HD content required to view HD images.

2. Integrated Intel software is available on select models only and requires separately purchased projector, tv or computer monitor with an integrated or external receiver. External receivers connect to the projector, tv or computer monitor via a standard VGA, HDMI cable, also sold separately.

#### MEMORY

Both slots are customer accessible / upgradeable, Supports Dual Channel Memory

Form Factor	Type	Maximum	# of Slots
Small Form Factor	DDR4 3200	64 GB capacity	2 DIMM <sup>1</sup>
4GB DDR4-3200 UDIMM NECC (1x4GB)			
8GB DDR4-3200 UDIMM NECC (1x8GB)			
8GB DDR4-3200 UDIMM NECC (2x4GB)			
16GB DDR4-3200 UDIMM NECC (1x16GB)			
16GB DDR4-3200 UDIMM NECC (2x8GB)			
32GB DDR4-3200 UDIMM NECC (1x32GB)			
32GB DDR4-3200 UDIMM NECC (2x16GB)			
64GB DDR4-3200 UDIMM NECC (2x32GB)			

1. Memory modules support data transfer rates up to 3200 MT/s; actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

### Standard Features and Configurable Modules

#### STORAGE AND DRIVES

**NOTE:** Starting from November 1<sup>st</sup>, 2023, all shipments will require Windows to be installed when selecting a SSD. HDD can only be configured as additional data drives and not as the boot drive.

##### **SATA3 - 3.5" or 2.5" 6Gb/s HDDs\***

2TB 7200 RPM SATA Hard Disk Drive

1TB 7200 RPM SATA Hard Disk Drive

500GB 7200 RPM SATA Hard Disk Drive<sup>1</sup>

1. Available on select skus only.

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

##### **M.2 Solid State Drives**

256GB\* M.2 NVMe

512GB\* M.2 NVMe

1TB\* M.2 NVMe

128GB\* M.2 2280 PCIe NVMe Three Layer Cell SSD<sup>1</sup>

256GB\* M.2 2280 PCIe NVMe Three Layer Cell SSD

512GB\* M.2 2280 PCIe NVMe Three Layer Cell SSD

1TB\* M.2 2280 PCIe NVMe Three Layer Cell SSD

1. Available on select skus only.

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows) of system disk is reserved for the system recovery software.

#### OPTICAL DISC DRIVES

DVD-ROM 9.5mm<sup>2</sup>

DVD-Writer 9.5mm<sup>2</sup>

2. Optical drives are optional or add on features. HD-DVD disks cannot be played on this drive. No support for DVD-RAM. Actual speeds may vary. Don't copy copyright-protected materials.

#### NETWORKING/COMMUNICATIONS

##### **Networking**

Integrated 10/100/1000M GbE LAN

##### **Wi-Fi® and Bluetooth®**

Realtek RTL8822CE-CG 802.11a/b/g/n/ac (2x2) with Bluetooth® wireless card M.2 PCIe<sup>®1</sup>

Realtek RTL8821CE-CG 802.11a/b/g/n/ac (1x1) with Bluetooth® wireless card M.2 PCIe<sup>®1</sup>

Realtek 8852BE Wi-Fi6 +BT5.2 wireless card Screw WLAN<sup>2</sup>

1. Wireless cards are optional or add-on features and requires separately purchased wireless access point and internet service. Availability of public wireless access points limited. Wi-Fi 5 (802.11 ac) is backwards compatible with prior 802.11 specs.

2. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 (802.11ax) is backwards compatible with prior 802.11 specs.

### Standard Features and Configurable Modules

#### AUDIO/MULTIMEDIA

Realtek ALC3867-CG

Integrated Hi-Definition Audio

Combo Jack, Headphone/ Microphone

Line-in/ Line-out (3.5mm)

### Standard Features and Configurable Modules

#### KEYBOARDS/POINTING DEVICES/BUTTONS AND FUNCTIONS KEYS

##### Keyboard

- HP USB 320K Keyboard
- HP 125 Wired Keyboard
- HP 125 Antimicrobial Wired Keyboard

##### Mouse

- HP Wired Desktop 320M mouse
- HP 125 Wired Mouse
- HP 128 Laser Wired Mouse
- HP 125 Antimicrobial Wired Mouse (China only)

#### PORTS

##### Front

- Slim-height Bay - supporting an optical disk drive (optional)
- (4) SuperSpeed USB 5Gbps signaling rate
- Microphone/Headphone Combo Jack
- Power Button

##### Not Shown

- (1) PCI Express4.0 x16
- (1) PCI Express3.0 x1
- (1) M.2 for WLAN
- (1) M.2 2230/2280 storage

##### Rear

- Audio Line out
- Audio Line in
- HDMI Port
- Standard lock slot
- VGA Port
- (4) USB 2.0 port
- RJ-45 Network Connector
- Power Cord Connector
- Padlock loop
- Integrated Accessories Cable Lock
- Serial port (optional)

### Standard Features and Configurable Modules

#### Not Shown

- (1) Parallel Port (Optional via PClex1 slot)
- (1) 4x Serial port (Optional via PClex1 slot)<sup>1</sup>
- (1) PS/2 Port (Optional)
- (1) Intrusion Sensor (Optional)

#### 1. Available for selected regions

#### BAYS

- (1) 3.5" internal storage
- (1) 9.5mm internal optical drive bay

### SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

#### Security and Protection

McAfee\* LiveSafe<sup>TM1</sup>

#### Productivity

- Microsoft 365 (sold separately and requires Internet access for activation)
- Dropbox<sup>2</sup>

#### ODD Playback

sMedio True DVD for HP

#### App Stores and Content Purchasing

Amazon<sup>4</sup>

#### HP Utilities and Support

HP Documentation

HP JumpStarts

HP Audio Switch<sup>5</sup>

HP Support Assistant<sup>6</sup>

myHP

#### BTB

HP Setup Integrated OOB

#### Hardware Enabling Drivers or software utility

HP System Event Utility

**\*NOTE:** Available for LA region only.

1. Free 1-year subscription of McAfee LiveSafe service included. Internet access required and not included. Subscription required after expiration.

2. New Dropbox users are eligible to get 25 GB of Dropbox space free for 12 months from date of registration. For complete details and terms of use, including cancellation policies, visit the Dropbox website at <https://www.dropbox.com/help/space/hp-promotion>. Internet service required and not included.

3. Simply sign up and start using Xerox® DocuShare® Go. No credit card. No obligation. Data will become unavailable unless a subscription is

### Standard Features and Configurable Modules

entered before the end of the 30 day free trial period. See visit <http://www.xerox.com/docusharego> for details.

4. Internet access required and not included.

5. Easily switch between speaker and microphone sources with intuitive controls and a consistent app experience

6. For more information visit [hp.com/go/hpsupportassistant](http://hp.com/go/hpsupportassistant) [Link will vary outside of the U.S.] HP Support Assistant is available for Android and Windows based PCs.

### POWER

#### Power Supply

180W

EPA85 Full range 115V/230V

EPA90 (Gold) Full range 115V/230V

240W

EPA92 (Platinum) Full range

### WEIGHT AND DIMENSIONS

(configured with 1 HDD and 1 ODD)

**Chassis (W x D x H)** 3.74 x 11.93 x 10.63 in (95 x 303 x 270 mm) (w/bezel)

**System Weight** 8.82 lbs / 4 kg\*

**\*NOTE:** Weight varies by configuration and component

### UNIT ENVIRONMENTAL AND OPERATING CONDITIONS

#### General Unit Operating Guidelines

##### Environmental and Industry

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

##### Temperature Range

**Operating:** 5° to 35° C<sup>1</sup>

**Non-operating:** -30° to 60°<sup>1</sup>

##### Relative Humidity

**Operating:** 5% to 90% (non-condensing at ambient)

**Non-operating:** 5% to 90% (non-condensing at ambient)

##### Maximum Altitude (unpressurized)

**Operating:** 5,000 m

**Non-operating:** 50,000 ft (15240 m)

1. Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

### Standard Features and Configurable Modules

<b>Eco-Label Certifications &amp; declarations</b>	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>• IT ECO declaration</li> <li>• US ENERGY STAR®</li> <li>• US Federal Energy Management Program (FEMP)</li> <li>• EPEAT Silver registered in the United States. See <a href="http://www.epeat.net">http://www.epeat.net</a> for registration status in your country.</li> <li>• China Energy Conservation Program (CECP)</li> <li>• China State Environmental Protection Administration (SEPA)</li> <li>• Taiwan Green Mark</li> <li>• Commission Regulation (EC) No 617/2013 (ErP Lot 3)</li> </ul>		
<b>System Configuration</b>	<p>The configuration used for the Energy Consumption and Declared Noise Emissions data for the Desktop model is based on a "Typically Configured Desktop".</p>		
<b>Energy Consumption (in accordance with US ENERGY STAR® test method)</b>	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 50Hz</b>
Normal Operation (Short idle)	12.46W	12.51W	12.40W
Normal Operation (Long idle)	10.16W	10.22W	10.02W
Sleep	1.76W	1.75W	1.76W
Off	0.38W	0.41W	0.41W
	<p><b>NOTE:</b> Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system. Search keyword generator on HP's 3rd party option store for solar generator accessories at <a href="http://www.hp.com/go/options">http://www.hp.com/go/options</a>.</p>		
<b>Heat Dissipation*</b>	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 50Hz</b>
Normal Operation (Short idle)	42.49 BTU/hr	42.66 BTU/hr	42.28 BTU/hr
Normal Operation (Long idle)	34.65 BTU/hr	34.85 BTU/hr	34.17 BTU/hr
Sleep	6.00 BTU/hr	5.97 BTU/hr	6.00 BTU/hr
Off	1.30 BTU/hr	1.40 BTU/hr	1.40 BTU/hr
	<p><b>NOTE:</b> Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.</p>		
<b>Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)</b>	<p>Sound Power (<math>L_{WAd}</math>, bels)</p>		Sound Pressure ( $L_{pAm}$ , decibels)
Typically Configured – Idle	3.2		19.7
Fixed Disk – Random writes	3.3		20.7
Optical Drive – Sequential reads	4.5		38.2
Longevity and Upgrading	<p>This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:</p> <p>Spare parts are available throughout the warranty period and or for up to "3" years after the end of production.</p>		
Batteries	<p>This battery(s) in this product comply with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain: Mercury greater than 1ppm by weight Cadmium greater than 20ppm by weight</p>		

### Standard Features and Configurable Modules

	Battery size: CR2032 (coin cell) Battery type: Lithium		
<b>Additional Information</b>	<ul style="list-style-type: none"> <li>This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2011/65/EC.</li> <li>This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.</li> <li>This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).</li> <li>This product is in compliance with the IEEE 1680.1 (EPEAT) standard at the &lt;Silver&gt; level, see <a href="http://www.epeat.net">http://www.epeat.net</a></li> <li>Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.</li> <li>This product contains 28.2% post-consumer recycled plastic (by wt.)</li> <li>This product is 91.7% recycle-able when properly disposed of at end of life.</li> </ul>		
<b>Packaging Materials</b>	<b>External:</b>	PAPER/Corrugated	540 g
	<b>Internal:</b>	PAPER/Molded Pulp	350 g
		PLASTIC/Polyethylene low density - LDPE	30 g
<b>Material Usage</b>	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf</a>):</p> <ul style="list-style-type: none"> <li>Asbestos</li> <li>Certain Azo Colorants</li> <li>Certain Brominated Flame Retardants – may not be used as flame retardants in plastics</li> <li>Cadmium</li> <li>Chlorinated Hydrocarbons</li> <li>Chlorinated Paraffins</li> <li>Formaldehyde</li> <li>Halogenated Diphenyl Methanes</li> <li>Lead carbonates and sulfates</li> <li>Lead and Lead compounds</li> <li>Mercuric Oxide Batteries</li> <li>Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.</li> <li>Ozone Depleting Substances</li> <li>Polybrominated Biphenyls (PBBs)</li> <li>Polybrominated Biphenyl Ethers (PBBEs)</li> <li>Polybrominated Biphenyl Oxides (PBBOs)</li> <li>Polychlorinated Biphenyl (PCB)</li> <li>Polychlorinated Terphenyls (PCT)</li> <li>Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.</li> <li>Radioactive Substances</li> <li>Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)</li> </ul>		
<b>Packaging Usage</b>	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> <li>Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.</li> <li>Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li> <li>Design packaging materials for ease of disassembly.</li> <li>Maximize the use of post-consumer recycled content materials in packaging materials.</li> <li>Use readily recyclable packaging materials such as paper and corrugated materials.</li> <li>Reduce size and weight of packages to improve transportation fuel efficiency.</li> <li>Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li> </ul>		

### Standard Features and Configurable Modules

<b>End-of-life Management and Recycling</b>	<p>HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/go/reuse-recycle">http://www.hp.com/go/reuse-recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <a href="http://www.hp.com/go/recyclers">http://www.hp.com/go/recyclers</a>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p> <p>Global Citizenship Report <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a></p> <p>Eco-label certifications <a href="http://www8.hp.com/us/en/hp-information/environment/ecolabels.html">http://www8.hp.com/us/en/hp-information/environment/ecolabels.html</a></p> <p>ISO 14001 certificates: <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf</a> and <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf</a></p>
---	--

### SERVICE AND SUPPORT

On-site Warranty<sup>1</sup>: Available three-year (3-3-3) or one-year (1-1-1) limited warranty (varies by country) delivers on-site, next business day<sup>2</sup> service for parts and labor and complimentary limited technical support<sup>3</sup>. Three-year onsite and labor are not available in all countries. Service offers terms up to 5 years by choosing an optional HP Care Service<sup>4</sup>. To choose the right level of service for your HP product, visit HP Care Pack Central: <http://www.hp.com/go/cpc>.

1. Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.
2. On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
3. Technical support applies only to HP-configured and third-party HP qualified hardware and software.
4. HP Care Packs are sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit <http://www.hp.com/go/cpc>. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

### GRAPHICS

### Technical Specifications - Graphics

#### GRAPHICS

<b>Intel® UHD Graphics (integrated)</b>	
Graphics Controller	Integrated
DisplayPort™	Multimode capable; supports HDCP, Display Port Audio (2 streams), HBR2 link rates and Multi-Stream Technology for a maximum of 4 displays connected to any output controlled by Intel® Graphics
HDMI	Supports HDMI 1.4 features Supports HDCP 2.2 Supports audio over HDMI
VGA	VGA output
Memory	The actual amount of maximum graphics memory can be >4GB. System memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.
Maximum Color Depth	up to 10 bits/color
Graphics/Video API Support	HEVC 10b Enc/Dec HW VP9 10b Dec HW HDR Rec. 2020 DX12
Supported Display Resolutions and Refresh Rates	Max. Resolution (VGA) 1920x1080 @60Hz Max. Resolution (HDMI) 4K2K @24Hz

**Note:** The actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.  
**Note:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP  
Only supported on displays connected to the external DisplayPort™ connector.

#### NVIDIA® Quadro T400 Graphics Card

<b>Engine Clock</b>	2100 MHz
<b>Memory Clock</b>	5001 MHz
<b>Memory Size (width)</b>	4GB (64-bit)
<b>Memory Type</b>	256M x 16 GDDR6
<b>Max. Resolution (DP)</b>	7680x4320@60Hz
<b>Multi Display Support</b>	4 displays
<b>HDCP Compliance</b>	Yes
<b>Rear I/O connectors (bracket)</b>	mDPx3
<b>Cooling (active/passive)</b>	Active fan-sink (Active cooling with dynamic speed)
<b>Total power consumption (W)</b>	30W
<b>PCB form-factor with bracket</b>	LP PCB with LP bracket

#### AMD® Radeon™ RX 6300 2GB Graphics Card

<b>Engine Clock</b>	1512 MHz (Game) 2040MHz (Boost)
<b>Memory Clock</b>	2000 MHz

### Technical Specifications - Graphics

<b>Memory Size(width)</b>	2GB
<b>Memory Type</b>	512M x 32 GDDR6
<b>Max. Resolution (HDMI)</b>	7680x4320x36bpp @60Hz
<b>Max. Resolution (DP)</b>	7680x4320x24bpp @120Hz
<b>Multi Display Support</b>	2 displays
<b>HDCP Compliance</b>	Yes
<b>Rear I/O connectors (bracket)</b>	HDMIx1+DPx1
<b>Cooling (active/pассивный)</b>	Active fan-sink
<b>Total power consumption (W)</b>	32W
<b>PCB form-factor with bracket FH</b>	LP PCB with LP/FH bracket

### Technical Specifications – Storage

#### STORAGE

**NOTE:** Starting from November 1<sup>st</sup>, 2023, all shipments will require Windows to be installed when selecting a SSD. HDD can only be configured as additional data drives and not as the boot drive.

#### HP 2TB\* 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive\*

<b>Capacity</b>	2TB
<b>Rotational Speed</b>	7,200 rpm
<b>Interface</b>	SATA 6Gb/s NCQ
<b>Buffer Size</b>	64 MB
<b>Logical Blocks</b>	3,907,029,168
<b>Seek Time</b>	Read: <8.5 ms Write: <9.5 ms
<b>Height</b>	1.028 in/26.11 mm
<b>Width</b>	4.0 in/101.6 mm
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C)

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

#### 1TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

<b>Capacity</b>	1TB
<b>Rotational Speed</b>	7,200 rpm
<b>Interface</b>	Serial ATA 3.0 (6.0 Gb/s)
<b>Buffer Size</b>	32 MB
<b>Logical Blocks</b>	1,953,525,168
<b>Seek Time</b>	Read: <8.5 ms Write: <9.5 ms Full-Stroke: 21 ms
<b>Height</b>	1 in/2.54 cm
<b>Width</b>	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

#### 500GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

<b>Capacity</b>	500GB
<b>Rotational Speed</b>	7,200 rpm
<b>Drive Type</b>	Serial ATA 3.0 (6.0 Gb/s)
<b>Interface</b>	32 MB
<b>Buffer Size</b>	976,773,168

### Technical Specifications – Storage

<b>Seek Time</b>	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
<b>Height</b>	1 in/2.54 cm
<b>Width</b>	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

### 128GB M.2 2280 PCIe NVMe Three Layer Cell SSD

<b>Drive Weight</b>	< 10g
<b>Capacity</b>	128GB
<b>Height</b>	2.38mm
<b>Length</b>	80mm
<b>Width</b>	22mm
<b>Interface</b>	PCIE Gen3x4
<b>Maximum Sequential Read</b>	Up to 2800MB/s
<b>Maximum Sequential Write</b>	Up to 600MB/s
<b>Logical Blocks</b>	250,069,680
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	APST; ASPM L1.2; NVME spec 1.2

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

### 256GB M.2 2280 PCIe NVMe Three Layer Cell SSD

<b>Drive Weight</b>	< 10g
<b>Capacity</b>	256GB
<b>Height</b>	2.38mm
<b>Length</b>	80mm
<b>Width</b>	22mm
<b>Interface</b>	PCIE Gen3x4
<b>Maximum Sequential Read</b>	Up to 2700MB/s
<b>Maximum Sequential Write</b>	Up to 1000MB/s
<b>Logical Blocks</b>	500,118,192
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	APST; ASPM L1.2; NVME spec 1.2

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

### Technical Specifications – Storage

#### 512GB M.2 2280 PCIe NVMe Three Layer Cell SSD

<b>Drive Weight</b>	< 10g
<b>Capacity</b>	512GB
<b>Height</b>	2.38mm
<b>Length</b>	80mm
<b>Width</b>	22mm
<b>Interface</b>	PCIE Gen3x4
<b>Maximum Sequential Read</b>	Up to 2900MB/s
<b>Maximum Sequential Write</b>	Up to 1100MB/s
<b>Logical Blocks</b>	1,000,215,216
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	APST; ASPM L1.2; NVME spec 1.2

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

#### 1TB M.2 2280 PCIe NVMe Three Layer Cell SSD

<b>Drive Weight</b>	< 10g
<b>Capacity</b>	1TB
<b>Height</b>	2.3mm
<b>Length</b>	80mm
<b>Width</b>	22mm
<b>Interface</b>	PCIE NVMe
<b>Maximum Sequential Read</b>	Up to 2900MB/s
<b>Maximum Sequential Write</b>	Up to 1100MB/s
<b>Logical Blocks</b>	2,000,409,264
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	Pyrite

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

#### 256GB M.2 2280 PCIe NVMe SSD

<b>Drive Weight</b>	< 10g
<b>Capacity</b>	256GB
<b>Height</b>	2.38mm
<b>Length</b>	80mm
<b>Width</b>	22mm
<b>Interface</b>	PCIE NVMe Gen4x4
<b>Maximum Sequential Read</b>	Up to 3000MB/s
<b>Maximum Sequential Write</b>	Up to 1700MB/s
<b>Logical Blocks</b>	500,118,192
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	APST; ASPM L1.2; NVME spec 1.2

### Technical Specifications – Storage

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

#### 512GB M.2 2280 PCIe NVMe SSD

<b>Drive Weight</b>	< 10g
<b>Capacity</b>	512GB
<b>Height</b>	2.38mm
<b>Length</b>	80mm
<b>Width</b>	22mm
<b>Interface</b>	PCIE NVMe Gen4X4
<b>Maximum Sequential Read</b>	Up to 3000MB/s
<b>Maximum Sequential Write</b>	Up to 1800MB/s
<b>Logical Blocks</b>	1,000,215,216
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	APST; ASPM L1.2; NVME spec 1.2

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

#### 1TB M.2 2280 PCIe NVMe SSD

<b>Drive Weight</b>	< 10g
<b>Capacity</b>	1TB
<b>Height</b>	2.3mm
<b>Length</b>	80mm
<b>Width</b>	22mm
<b>Interface</b>	PCIE NVMe Gen4x4
<b>Maximum Sequential Read</b>	Up to 3500MB/s
<b>Maximum Sequential Write</b>	Up to 2500MB/s
<b>Logical Blocks</b>	2,000,409,264
<b>Operating Temperature</b>	0° to 70°C (32° to 158°F) [ambient temp]
<b>Features</b>	Pyrite

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

### Technical Specifications – Storage

#### 500GB 7200RPM 2.5in SATA HDD

<b>Capacity</b>	500GB
<b>Rotational Speed</b>	7,200 rpm
<b>Interface</b>	SATA 6 Gb/s
<b>Buffer Size</b>	32 MB
<b>Logical Blocks</b>	976,773,168
<b>Seek Time</b>	12 ms (Average)
<b>Height</b>	0.267 in/6.8 mm (nominal)
<b>Width (nominal)</b>	2.75 in/70 mm (nominal)
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

#### 1TB 7200RPM 2.5in SATA HDD

<b>Capacity</b>	1TB
<b>Rotational Speed</b>	7,200 rpm
<b>Interface</b>	SATA 6 Gb/s
<b>Buffer Size</b>	32 MB
<b>Logical Blocks</b>	1,953,525,168
<b>Seek Time</b>	12 ms (Average)
<b>Height</b>	0.374 in/9.5 mm (nominal)
<b>Width (nominal)</b>	2.75 in/70 mm (nominal)
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36GB (for Windows) of system disk is reserved for the system recovery software.

### Technical Specifications – Optical Disc Drives

#### OPTICAL DISC DRIVES

##### HP 9.5mm Desktop G2 Slim DVD Writer Drive

<b>Height</b>	9.5 mm height
<b>Orientation</b>	Either horizontal or vertical
<b>Interface type</b>	SATA/ATAPI
<b>Disc recording capacity</b>	Up to 8.5 GB DL or 4.7 GB standard
<b>Dimensions (W x H x D)</b>	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel
<b>Weight (max)</b>	0.31 lb (140 g)
<b>Read Speeds</b>	DVD-R DL - Up to 6X DVD+R - Up to 8X DVD+RW - Up to 8X DVD+R DL - Up to 6X DVD-R - Up to 8X DVD-RW - Up to 6X CD-R - Up to 24X CD-RW - Up to 10X DVD-RW, DVD+RW - Up to 8X DVD-R DL, DVD+R DL - Up to 8X DVD+R, DVD-R - Up to 8X DVD-ROM DL, DVD-ROM - Up to 8X CD-ROM, CD-R - Up to 24X CD-RW - Up to 24X
<b>Access time (typical reads, including settling)</b>	Random DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full Stroke DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical) Stop Time 6 seconds (typical)
<b>Power</b>	Source Slimline SATA DC power receptacle DC Power Requirement 5 VDC ± 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum)
<b>Environmental conditions (operating - non-condensing)</b>	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C)

##### HP 9.5mm Desktop G2 Slim DVD-ROM Drive

<b>Height</b>	9.5 mm height
<b>Orientation</b>	Either horizontal or vertical
<b>Interface type</b>	SATA/ATAPI
<b>Disc recording capacity</b>	Up to 8.5 GB DL or 4.7 GB standard
<b>Dimensions (W x H x D)</b>	5.04 x 0.37 x 5.0 in (128 x 9.5 x 127 mm) without bezel
<b>Weight (max)</b>	0.31 lb (140 g)
<b>Read Speeds</b>	DVD-R DL - Up to 6X DVD+R - Up to 8X DVD+RW - Up to 8X DVD+R DL - Up to 6X DVD-R - Up to 8X DVD-RW - Up to 6X CD-R - Up to 24X CD-RW - Up to 10X

### Technical Specifications – Optical Disc Drives

	DVD-RW, DVD+RW - Up to 8X
	DVD-R DL, DVD+R DL - Up to 8X
	DVD+R, DVD-R - Up to 8X
	DVD-ROM DL, DVD-ROM - Up to 8X
	CD-ROM, CD-R - Up to 24X
	CD-RW - Up to 24X
<b>Access time (typical reads, including settling)</b>	Random DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) Full Stroke DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical) Stop Time 6 seconds (typical)
<b>Power</b>	Source Slimline SATA DC power receptacle DC Power Requirement 5 VDC ± 5%-100 mV ripple p-p DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum)
<b>Environmental conditions (operating - non-condensing)</b>	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 80% Maximum Wet Bulb Temperature 84° F (29° C)

### Technical Specifications – Audio

#### HIGH DEFINITION AUDIO

<b>Type</b>	Integrated
<b>HD Audio Codec</b>	Realtek ALC3867-CG
<b>Audio I/O Ports</b>	Front side Combo jack for supporting CTIA, Rear side Line-in/ Line-out/ Mic-in jacks
<b>Wavetable Syntheses</b>	Yes
<b>Analog Audio</b>	Yes
<b>Internal Speaker</b>	NA
<b>DAC Sampling Rates</b>	16 to 24-bit; 44.1K/ 48 K/96K / 192K Hz
<b>ADC Sampling Rates</b>	16 bit, 44.1K/ 48K/ 96K/ 192K Hz

### Technical Specifications - Power

#### POWER SUPPLY

##### P/S 180W SFF ENTS20L EAP85

<b>Operating Voltage Range</b>	180 – 264 VAC
<b>Rated Voltage Range</b>	200-240V AC
<b>Rated Line Frequency</b>	50/60 Hz
<b>Operating Line Frequency</b>	47 – 63 Hz
<b>Rated Input Current</b>	180W: <1.3A
<b>Rated Input Current with Energy Efficient* Power Supply</b>	82/85/82% efficient at 20/50/100% load (230V)
<b>DC Output</b>	+12.1V
<b>Current Leakage (NFPA 99: 2102)</b>	Less than 500 microamps of leakage current at 120 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. Less than 100 microamps of leakage current at 120 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.
<b>Power Supply Fan</b>	50 x 20 mm (linear type)

##### P/S 180W SFF ENTS20L EAP90 (GOLD)

<b>Operating Voltage Range</b>	90 – 264 VAC
<b>Rated Voltage Range</b>	100-240V AC
<b>Rated Line Frequency</b>	50/60 Hz
<b>Operating Line Frequency</b>	47 – 63 Hz
<b>Rated Input Current</b>	180W: <2.3A
<b>Rated Input Current with Energy Efficient* Power Supply</b>	87/90/87% efficient at 20/50/100% load (115Vac) 88/92/88% efficient at 20/50/100% load (230V)
<b>DC Output</b>	+12.1V
<b>Current Leakage (NFPA 99: 2102)</b>	Less than 500 microamps of leakage current at 120 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. Less than 100 microamps of leakage current at 120 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.
<b>Power Supply Fan</b>	50 x 20 mm (linear type)

### Technical Specifications - Power

#### **P/S 240W SFF ENTS20L EAP92 (PLATINUM)**

<b>Operating Voltage Range</b>	90 – 264 VAC
<b>Rated Voltage Range</b>	100-240V AC
<b>Rated Line Frequency</b>	50/60 HZ
<b>Operating Line Frequency</b>	47 – 63 Hz
<b>Rated Input Current</b>	240W Platinum $\leq$ 2.9A
<b>Rated Input Current with Energy Efficient* Power Supply</b>	90/92/89% efficient at 20/50/100% load (115V) 91/93/90% efficient at 20/50/100% load (230V)
<b>DC Output</b>	+12V
<b>Current Leakage (NFPA 99: 2102)</b>	Less than 500 microamps of leakage current at 264 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1. Less than 100 microamps of leakage current at 264 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.
<b>Power Supply Fan</b>	50mm variable speed

### Technical Specifications – Weights and Dimensions

#### WEIGHTS AND DIMENSIONS

<b>Chassis (W x D x H)</b>	3.74 x 11.93 x 10.63 in (95 x 303 x 270 mm) (w/ bezel)
<b>System Volume</b>	463.16cu in 7.6L
<b>System Weight*</b>	8.82 lbs / 4 kg
<b>Packaged (H x W x D)</b>	13.46 x 7.72 x 19.65 in 342 x 196 x 499 mm
<b>Shipping Weight*</b>	13.2 lb / 6 kg
<b>Shipping Weight (Molded Pulp)*</b>	13.86 lb / 6.3 kg
<b>Palletization Profile</b>	12-units per layer 6 layer max 72 per pallet Footprint (HxWxD) 85.91 x 39.37 x 47.24 in (2182 x 1000 x 1200 mm)

**\*NOTE:** Weight varies by configuration and component

### Technical Specifications – Networking

#### NETWORKING

##### 10/100/1000 Integrated NIC

<b>Ethernet Features</b>	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
<b>Power Management</b>	ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
<b>Performance Features</b>	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling Jumbo Frame 9K
<b>Manageability</b>	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status

##### Realtek RTL8821CE-CG 802.11a/b/g/n/ac (1x1) with Bluetooth® wireless card M.2 PCIe®

<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac	
1. Wireless access point and internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 5 (802.11 ac) is backwards compatible with prior 802.11 specs.		
<b>Interoperability</b>	Wi-Fi® certified modules	
<b>Frequency Bands</b>	802.11b/g/n	<ul style="list-style-type: none"><li>• 2.402 – 2.482 GHz</li></ul> <p>Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p>
	802.11a/n	<ul style="list-style-type: none"><li>• 4.9 – 4.95 GHz (Japan)</li><li>• 5.15 – 5.25 GHz</li><li>• 5.25 – 5.35 GHz</li><li>• 5.47 – 5.725 GHz</li><li>• 5.825 – 5.850</li></ul>
<b>Data Rates</b>	<ul style="list-style-type: none"><li>• 802.11b: 1, 2, 5.5, 11 Mbps</li><li>• 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li><li>• 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li><li>• 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li></ul>	

### Technical Specifications – Networking

	<ul style="list-style-type: none"> <li>• 802.11ac: MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)</li> </ul>
<b>Modulation</b>	<p>Direct Sequence Spread Spectrum</p> <p>BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM</p>
<b>Security<sup>2</sup></b>	<ul style="list-style-type: none"> <li>• IEEE and 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x, WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul> <p><a href="#">2 Check latest software/driver release for updates on supported security features.</a></p>
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power<sup>3</sup></b>	<ul style="list-style-type: none"> <li>• 802.11b: +14dBm minimum</li> <li>• 802.11g: +12dBm minimum</li> <li>• 802.11a: +12dBm minimum</li> <li>• 802.11n HT20(2.4GHz): +12dBm minimum</li> <li>• 802.11n HT40(2.4GHz): +12dBm minimum</li> <li>• 802.11n HT20(5GHz): +10dBm minimum</li> <li>• 802.11n HT40(5GHz): +10dBm minimum</li> <li>• 802.11ac VHT80(5GHz): +10dBm minimum</li> </ul> <p><a href="#">3. Maximum output power may vary by country according to local regulations.</a></p>
<b>Power Consumption</b>	<ul style="list-style-type: none"> <li>• Transmit mode 2.0 W</li> <li>• Receive mode 1.6 W</li> <li>• Idle mode (PSP) 180 mW (WLAN Associated)</li> <li>• Idle mode 50 mW (WLAN unassociated)</li> <li>• Connected Standby 10mW</li> <li>• Radio disabled 8 mW</li> </ul>
<b>Power Management</b>	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>4</sup></b>	802.11b, 1Mbps: -93.5dBm maximum 802.11b, 11Mbps: -84dBm maximum 802.11a/g, 6Mbps: -86dBm maximum 802.11a/g, 54Mbps: -72dBm maximum 802.11n, MCS07: -67dBm maximum 802.11n, MCS15: -64dBm maximum 802.11ac, MCS0: -84dBm maximum

### Technical Specifications – Networking

	802.11ac, MCS9: -59dBm maximum	
	4 Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).	
<b>Antenna type</b>	High efficiency antenna. One embedded dual band 2.4/5 GHz antenna is provided to the card to support WLAN communications and Bluetooth communications	
<b>Form Factor</b>	PCI-Express M.2 MiniCard	
<b>Dimensions</b>	Type 2230: 2.3 x 22.0 x 30.0 mm	
<b>Weight</b>	Type 2230: 2.8g	
<b>Operating Voltage</b>	3.3v +/- 9%	
<b>Temperature</b>	<b>Operating:</b> <b>Non-operating:</b>	14° to 158° F (-10° to 70° C) -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	<b>Operating:</b> <b>Non-operating:</b>	10% to 90% (non-condensing) 5% to 95% (non-condensing)
<b>Altitude</b>	<b>Operating:</b> <b>Non-operating:</b>	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED White – Radio ON	

### HP Integrated Module with Bluetooth 4.0/4.1/4.2 Wireless Technology

<b>Bluetooth Specification</b>	4.0/4.1/4.2 Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)
<b>Data Rates and Throughput</b>	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.
<b>Receiver Sensitivity Legacy</b>	
<b>Power Consumption</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW
<b>Range</b>	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)
<b>Electrical Interface</b>	USB 2.0 compliant

### Technical Specifications – Networking

<b>Bluetooth Software Supported Link Topology</b>	Microsoft Windows Bluetooth Software
<b>Power Management Certifications</b>	Microsoft Windows ACPI, and USB Bus Support
<b>Certifications</b> <b>Bluetooth Profiles Supported</b>	BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

### Realtek RTL8822CE 802.11ac 2x2 Wi-Fi + BT5.1 wireless card

<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v
	1. Wireless access point and internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 5 (802.11 ac) is backwards compatible with prior 802.11 specs.
<b>Interoperability</b>	Wi-Fi® certified
<b>Frequency Band</b>	802.11b/g/n • 2.402 – 2.482 GHz 802.11a/n/ac • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz

### Technical Specifications – Networking

<b>Data Rates</b>	<ul style="list-style-type: none"> <li>• 802.11b: 1, 2, 5.5, 11 Mbps</li> <li>• 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li> <li>• 802.11ac: MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz &amp; 80MHz)</li> </ul>
<b>Modulation</b>	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
<b>Security<sup>2</sup></b>	<ul style="list-style-type: none"> <li>• IEEE and Wi-Fi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• WAPI</li> </ul> <p><a href="#">2 Check latest software/driver release for updates on supported security features.</a></p>
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power<sup>3</sup></b>	<ul style="list-style-type: none"> <li>• 802.11b: +18.5dBm minimum</li> <li>• 802.11g: +17.5dBm minimum</li> <li>• 802.11a: +18.5dBm minimum</li> <li>• 802.11n HT20(2.4GHz): +15.5dBm minimum</li> <li>• 802.11n HT40(2.4GHz): +14.5dBm minimum</li> <li>• 802.11n HT20(5GHz): +15.5dBm minimum</li> <li>• 802.11n HT40(5GHz): +14.5dBm minimum</li> <li>• 802.11ac VHT80(5GHz): +11.5dBm minimum</li> <li>• 802.11ac VHT160(5GHz): +11.5dBm minimum</li> </ul> <p><a href="#">3. Maximum output power may vary by country according to local regulations.</a></p>
<b>Power Consumption</b>	<ul style="list-style-type: none"> <li>• Transmit mode:2.0 W</li> <li>• Receive mode:1.6 W</li> <li>• Idle mode (PSP) 180 mW (WLAN Associated)</li> <li>• Idle mode:50 mW (WLAN unassociated)</li> <li>• Connected Standby/Modern Standby: 10mW</li> <li>• Radio disabled: 8 mW</li> </ul>
<b>Power Management</b>	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>4</sup></b>	802.11b, 1Mbps: -93.5dBm maximum 802.11b, 11Mbps: -84dBm maximum 802.11a/g, 6Mbps: -86dBm maximum 802.11a/g, 54Mbps: -72dBm maximum 802.11n, MCS07: -67dBm maximum 802.11n, MCS15: -64dBm maximum 802.11ac, MCS0: -84dBm maximum 802.11ac, MCS9: -59dBm maximum <p><a href="#">4 Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</a></p>

### Technical Specifications – Networking

<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure  Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
<b>Form Factor</b>	PCI-Express M.2 MiniCard with CNVi Interface
<b>Dimensions</b>	1. Type 2230: 2.3 x 22.0 x 30.0 mm 2. Type 1216: 1.67 x 12.0 x 16.0 mm
<b>Weight</b>	1. Type 2230: 2.8g 2. Type 126: 1.3g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	<b>Operating:</b> 14° to 158° F (-10° to 70° C) <b>Non-operating:</b> -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	<b>Operating:</b> 10% to 90% (non-condensing) <b>Non-operating:</b> 5% to 95% (non-condensing)
<b>Altitude</b>	<b>Operating:</b> 0 to 10,000 ft (3,048 m) <b>Non-operating:</b> 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED OFF – Radio ON
<b>HP Integrated Module with Bluetooth 4.0/4.1/4.2/5.0 Wireless Technology</b>	
<b>Bluetooth Specification</b>	4.0/4.1/4.2/5.0 Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)
<b>Data Rates and Throughput</b>	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.
<b>Power Consumption</b>	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
<b>Bluetooth Software Supported</b>	Microsoft Windows Bluetooth Software
<b>Link Topology</b>	
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support
<b>Certifications</b>	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
<b>Power Management</b>	ETS 300 328, ETS 300 826 Low Voltage Directive IEC60950-1/IEC62368-1
<b>Certifications</b>	UL, CSA, and CE Mark
<b>Bluetooth Profiles Supported</b>	BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising

### Technical Specifications – Networking

LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)
---

### Realtek 8852BE Wi-Fi6 +BT5.2 wireless card WLAN<sup>1</sup>

<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac IEEE 802.11d IEEE 802.11e IEEE 802.11h IEEE 802.11i IEEE 802.11k IEEE 802.11r IEEE 802.11v
1. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 (802.11ax) is backwards compatible with prior 802.11 specs.	
<b>Interoperability</b>	Wi-Fi® certified
<b>Frequency Band</b>	802.11b/g/n • 2.402 – 2.482 GHz 802.11a/n/ac • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz
<b>Data Rates</b>	• 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) • 802.11ac: MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz & 80MHz)
<b>Modulation</b>	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM

### Technical Specifications – Networking

<b>Security<sup>2</sup></b>	<ul style="list-style-type: none"> <li>IEEE and Wi-Fi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>AES-CCMP: 128 bit in hardware</li> <li>802.1x authentication</li> <li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>WPA2 certification</li> <li>IEEE 802.11i</li> <li>WAPI</li> </ul> <p>2 Check latest software/driver release for updates on supported security features.</p>
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power<sup>3</sup></b>	<ul style="list-style-type: none"> <li>802.11b: +18.5dBm minimum</li> <li>802.11g: +17.5dBm minimum</li> <li>802.11a: +18.5dBm minimum</li> <li>802.11n HT20(2.4GHz): +15.5dBm minimum</li> <li>802.11n HT40(2.4GHz): +14.5dBm minimum</li> <li>802.11n HT20(5GHz): +15.5dBm minimum</li> <li>802.11n HT40(5GHz): +14.5dBm minimum</li> <li>802.11ac VHT80(5GHz): +11.5dBm minimum</li> <li>802.11ac VHT160(5GHz): +11.5dBm minimum</li> </ul> <p>3. Maximum output power may vary by country according to local regulations.</p>
<b>Power Consumption</b>	<ul style="list-style-type: none"> <li>Transmit mode:2.0 W</li> <li>Receive mode:1.6 W</li> <li>Idle mode (PSP) 180 mW (WLAN Associated)</li> <li>Idle mode:50 mW (WLAN unassociated)</li> <li>Connected Standby/Modern Standby: 10mW</li> <li>Radio disabled: 8 mW</li> </ul>
<b>Power Management</b>	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>4</sup></b>	802.11b, 1Mbps: -93.5dBm maximum 802.11b, 11Mbps: -84dBm maximum 802.11a/g, 6Mbps: -86dBm maximum 802.11a/g, 54Mbps: -72dBm maximum 802.11n, MCS07: -67dBm maximum 802.11n, MCS15: -64dBm maximum 802.11ac, MCS0: -84dBm maximum 802.11ac, MCS9: -59dBm maximum <p>4 Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</p>
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure  Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
<b>Form Factor</b>	PCI-Express M.2 MiniCard with CNVi Interface
<b>Dimensions</b>	1. Type 2230: 2.3 x 22.0 x 30.0 mm 2. Type 1216: 1.67 x 12.0 x 16.0 mm

### Technical Specifications – Networking

<b>Weight</b>	1. Type 2230: 2.8g 2. Type 126: 1.3g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	<b>Operating:</b> 14° to 158° F (-10° to 70° C) <b>Non-operating:</b> -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	<b>Operating:</b> 10% to 90% (non-condensing) <b>Non-operating:</b> 5% to 95% (non-condensing)
<b>Altitude</b>	<b>Operating:</b> 0 to 10,000 ft (3,048 m) <b>Non-operating:</b> 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED OFF – Radio ON
<b>HP Integrated Module with Bluetooth® 4.0/4.1/4.2/5.0 Wireless Technology</b>	
<b>Bluetooth Specification</b>	4.0/4.1/4.2/5.0 Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)
<b>Data Rates and Throughput</b>	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.
<b>Power Consumption</b>	Peak (Tx): 330 mW Peak (Rx): 230 mW Selective Suspend: 17 mW
<b>Bluetooth Software Supported</b>	Microsoft Windows Bluetooth Software
<b>Link Topology</b>	
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support
<b>Certifications</b>	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
<b>Power Management</b>	ETS 300 328, ETS 300 826 Low Voltage Directive IEC60950-1/IEC62368-1
<b>Certifications</b>	UL, CSA, and CE Mark
<b>Bluetooth Profiles Supported</b>	BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2

### Technical Specifications – Networking

	Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)
--	---

After-Market Options (availability may vary by region)

### AFTER MARKET OPTIONS

<u>Type</u>	<u>Description</u>	<u>Part #</u>
<b>Memory</b>	HP 4GB DDR4-3200 DIMM	13L78AA
	HP 8GB DDR4-3200 DIMM	13L76AA
	HP 16GB DDR4-3200 DIMM	13L74AA
	HP 32GB DDR4-3200 DIMM	13L72AA
<b>Storage</b>	HP PCIe Gen 4 NVME TLC M.2 512GB SSD	406L8AA
	HP PCIe Gen 4 NVME TLC M.2 1TB SSD	406L7AA
	HP 500GB 7200PRM SATA 6.0Gb/s 3.5" Hard Drive	QK554AA
	HP 1TB 7200rpm SATA 6Gb/s 3.5" Hard Drive	QK555AA
	HP PCIe Gen 4 NVME TLC M.2 1TB SSD	406L7AA
<b>Graphics</b>	NVIDIA T400 4GB GDDR6 3mDP	5Z7E0AA
	AMD Radeon RX 6300 2GB GDDR6 DP + HDMI	7Y6P7AA
<b>Security</b>	HP Business PC Security Lock V3 Kit	3XJ17AA
	HP Keyed Cable Lock 10mm kit	T1A62AA
<b>Adapters</b>	HP PCIe x1 Parallel Port Card	N1M40AA
	HP HDMI Standard Cable Kit	T6F94AA
	HP USB to Serial Port Adapter	J7B60AA
	DisplayPort Cable Kit	VN567AA
<b>Networking</b>	Intel Ethernet I225-T1 GbE NIC Card	406L9AA
<b>Input</b>	HP Wired Desktop 320K Keyboard	9SR37AA
	HP 125 Wired Mouse	265A9AA
	HP 225 Wired Mouse and Keyboard Combo	286J4AA
	HP 225 Antimicrobial Wired Mouse and Keyboard Combo	286K3AA
	HP Wired Desktop 320K Keyboard	9SR37AA
	HP Wired Desktop 320M Mouse	9VA80AA
	HP 125 Wired Keyboard	266C9AA
	HP 125 Wired Mouse	265A9AA

### Change Log

© Copyright 2025 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Celeron®, Core, Pentium are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark of its proprietor, used by HP Inc. under license. NVIDIA, GeForce, Kepler and NVS are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. AMD and Radeon are trademarks of Advanced Micro Devices, Inc. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Wi-Fi® is a registered trademark of Wi-Fi Alliance®.

Date of change:	Version History:		Description of change:
June 21, 2023	From v1 to v2	Correction	Sku's for adapters in AMO corrected
August 17, 2023	From v2 to v3	Update	Back call outs image updated
August 21, 2023	From v3 to v4	Addition	Serial port (optional) added to Rear ports section
November 25, 2024	From v4 to v5	Update	256GB/512GB/1TB M.2 2280 PCIe NVMe SSD tables updated
March 10, 2025	From v5 to v6	Update	256GB/512GB/1TB PCIE NVME SSD "Value" added on description as long as 4x4 into Interface, the 2nd NOTE: PCIe Gen4 based removed
June 26, 2025	From v6 to v7	Update	Graphics integrated table and PSU for 180W and 240W titles updated
	From v7 to v8		
	From v8 to v9		
	From v9 to v10		
	From v10 to v11		
	From v11 to v12		