

Fairlight HDMI Monitor Interface



If you are using the Fairlight Console components in your own custom desk with HDMI monitors, you can use Fairlight HDMI Monitor Interface to generate the graphical feedback from Fairlight Console Channel Control! This compact converter can be placed discretely on the back of your HDMI monitor and converts the Fairlight console ethernet data to HDMI. You get instant graphic feedback for the channel control status just as you would with the Fairlight Console LCD Monitor! The interface input can also be switched to SDI so you can see the talent up close for checking lip sync while editing, and an SDI output that mirrors the HDMI output lets you connect the interface to a remote SDI monitor!

\$269

Connections

Ethernet

Ethernet supports 10/100/1000 BaseT.

HDMI Video Output

HDMI Type A out.

SDI Inputs

1 x 3G-SDI

SDI Video Outputs


2 x 3G-SDI

SDI Rates

1.5G, 3G.

Updates and Configuration

1 x USB Type-C for software configuration and software updates.

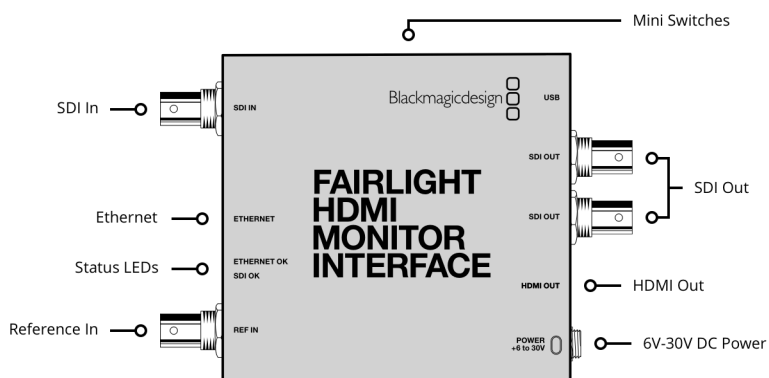

Standards

HDMI Video Standards

1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60

SDI Compliance

SMPTE 259M, SMPTE 292M,
SMPTE 296M, SMPTE 424M-B,
SMPTE 425 Level A and Level B.

SDI Color Space

YUV

SDI Video Standards

1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60, 1080i50,
1080i59.94, 1080i60

SDI Video Sampling

4:2:2

SDI Color Precision

10-bit

Updates and Configuration

1 x USB Type-C for software configuration and software updates.

Software

Internal software upgrade via updater application.

Settings Control

Fairlight Studio and Console setup utility software when connected by USB.

Power Requirements

Power Supply

+12V universal power supply included
with international socket adapters for
most countries.

Power Consumption

6W max.

Operational Voltage Range

6 - 30V DC.

Physical Specifications



Environmental Specifications

Operating Temperature

0° to 40°C (32° to 104°F)

Storage Temperature

-20° to 60°C (-4° to 140°F)

Relative Humidity

0% to 90% non-condensing

What's Included

Fairlight HDMI Monitor Interface

12V universal power supply with international socket adapters for most countries.

Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2024, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller