




Wiremold  
PLGMD SGL CRCT 30IN. OC 5FT. NM2400  
Part No. NM24GB530

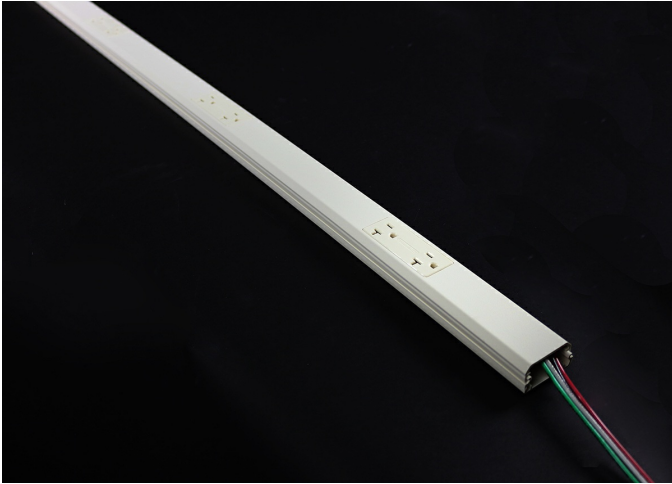

Plugmold® Multioutlet Systems are available in a wide variety of lengths and fittings and in a variety of finishes to provide versatile solutions for many applications. Plugmold options include single or alternating circuits, standard or isolated ground receptacles, GFCI protection, tamper-resistant protection, USB charging, Snapicoil® harnesses of prewired receptacles, and cord-ended units. Plugmold® Multioutlet Systems are available in black or ivory ScuffCoat™ finish, painted white or gray enamel steel, stylish stainless steel, anodized aluminum and durable textured ivory nonmetallic. The painted steel product works with many types of decor and is paintable to integrate with most color schemes. Durable stainless steel and anodized aluminum Plugmold products are corrosion-resistant, making them ideal for labs.

## Features & Benefits

5' (1.5m) length with 30" (762mm) receptacle spacing. 20A receptacles. 3-wire, #12 THHN (1 hot, 1 neutral, and insulated ground conductor). Packed 2 per carton. Each unit supplied with two (2) Blank End Fittings.

## Specifications

### General Info

|                   |               |                       |              |
|-------------------|---------------|-----------------------|--------------|
| Product Line      | Wiremold      | UPC Number            | 786776520187 |
| Country Of Origin | United States | Number of Receptacles | 2            |

|                    |            |          |                                                                                                                                                                                                                                                                                                                                             |
|--------------------|------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application Sector | Commercial | Standard | cULus Listed Base & Blank Cover: File E90378 Guide RJBT. Multioutlet Assemblies: File E15191 Guide PVGT. Fittings: File E90377 GuideRJPR. Base & Blank Cover & Plugmold Series w/Snapcoil Harness: Meets Article 386 of NEC. Meets Section 12-3032 of CEC. Plugmold Wired Sections: Meets Article 380 of NEC. Meets Section 12-3032 of CEC. |
|--------------------|------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|      |          |
|------|----------|
| Type | Plugmold |
|------|----------|

### Listing Agencies / 3rd Party Agencies

|                     |        |              |     |
|---------------------|--------|--------------|-----|
| cULus ListingNumber | E15191 | cULus Listed | Yes |
|---------------------|--------|--------------|-----|

---

Buy American Act Compliance

---

|       |     |
|-------|-----|
| NAFTA | Yes |
|-------|-----|

---

Additional Information

---

|                 |     |
|-----------------|-----|
| RoHS Conformant | Yes |
|-----------------|-----|

---

Technical Information

---

|          |       |                          |                        |
|----------|-------|--------------------------|------------------------|
| Amperage | 15 A  | Enclosure Type           | Non-Metallic           |
| Voltage  | 120 V | Environmental Conditions | Dry interior locations |

---