




M.2 SSD Slot



1x USB-C 3.2 Gen2
4x USB-A



Support triple display
2x HDMI & 1x DP



RJ45 Ethernet Port

Unleash your productivity.

Empower your workspace with Verbatim CDS-15S, a dynamic docking station featuring one USB-C 3.2 Gen2 and two USB-A 3.2 Gen2 ports for swift data transfer. The USB-A 480 Mb/s, RJ45, and SD/MicroSD slots ensure versatile connectivity.

Elevate your storage capabilities with the M.2 SSD slot, unlocking rapid access to essential files and simplifying automatic backup. Experience visual brilliance with dual HDMI and single DP 8K connection, facilitating immersive triple display setups.

This docking station seamlessly integrates high-performance components to streamline your workflow, catering to professionals handling data-intensive tasks.

USB-C™ Pro Docking Station

15 Port with SSD Slot

CDS-15S

General Information	
Product dimensions LxWxD	168 x 68,5 x 34 mm
Product weight	340
Material	Aluminum+ABS
Colour	Black/Grey
Connections	
Host Port	USB-C Host to connect to your device.
Power IN	USB-C PD: supports up to 80W charging, input max. 100W to connect your power supply.
USB Ports	1 x USB-A 2.0: up to 480Mb/s - Design for the connection of 2.4 GHz wireless devices, such as wireless keyboards/mouse adapters etc. 2 x USB-A 3.2 Gen1: up to 5Gb/s backwards compatible with USB 2.0. 1 x USB-A 3.2 Gen2: up to 10Gb/s backwards compatible with USB 3.2 Gen1 and USB 2.0. 1 x USB-C 3.2 Gen2: up to 10Gb/s Power: 5V 0.9A
Video*	2 x HDMI: 8K@30Hz, 4K/60Hz/10bit, 1080p/60Hz/48bit, 720p/60Hz/48bit Supports 1080p/720p - Bandwidth: 12G 1 x DP 1.4: 8K@30Hz, 4K/60Hz/10bit, 1080p/60Hz/48bit, 720p/60Hz/48bit. Supports 1080p/720p - Bandwidth: 8G
Audio	1 x Audio jack 3.5mm: in/out /8 channel sampling rate 192khz/16bit
Memory Card	1 x SD 4.0: Read speed: Up to 250MB/s, Write speed: Up to 250MB/s 1 x Micro SD 3.0 Read speed: Up to 104MB/s, Write speed: Up to 80MB/s
Ethernet	1 x RJ45, up to 1Gb/s
SSD Slot	M.2 NVMe PCIe M Key/B&M Key (10Gb/s) M.2 SATA B&M Key (5Gb/s)
Other Features	
Supported OS	Windows 10/11, MacOS 10.2 or higher
Status LED	Yes
Power Switch	Yes
Safety Lock	Kensington Security Lock Slot
Storage and Operating Conditions	
Operating Temperature	0°C to 40°C (32°F to 104°F)
Operating Humidity	20%-90%RH
Storage Temperature	-20°C to 85°C (-4°F to 185°F)
Storage Humidity	5%-95%RH

DP 1.4	HDMI	HDMI	DP
Single Display	8k@30Hz or 4K@120Hz	-	-
	-	8k@30Hz or 4K@120Hz	-
	-	-	8k@30Hz or 4K@120Hz
Dual Display	4K@60Hz	4K@60Hz	-
	-	4K@60Hz	4K@60Hz
	4K@60Hz	-	4K@60Hz
Triple Display	4K@60Hz	4K@30Hz	4K@30Hz

DP 1.2	HDMI	HDMI	DP
Single Display	4K@30Hz	-	-
	-	4K@30Hz	-
	-	-	4K@30Hz
Dual Display	2K@60Hz	1080p@60Hz	-
	-	2K@60Hz	1080p@60Hz
	1080p@60Hz	-	2K@60Hz
Triple Display	Supports a maximum of two displays.		


* Check which DP mode is supported by your device. MacOS only supports extension to one external monitor, second and third monitor can only mirror the first one. Windows has no limitations.

USB-C™ Pro Docking Station 15 Port with SSD Slot

CDS-15S

PN	Description	Bar Code	EAN128 Code	EAN14 Code
32173	USB-C Pro Docking Station 15 Port with SSD slot CDS-15S	023942321736	(02)0023942321736(37)05(91)893	50023942321731

Logistic Information	
Pack Dimensions L x W x H	220 x 115 x 36 mm
Pack Weight	436
Units per Pack	1
Outer Carton Dimensions L x W x H	235 x 200 x 140 mm
Outer Cartons Weight	2450
Units per Outer Carton	5
Outer Cartons per Layer	20
Layers per Pallet	7
Outer Boxes per pallet	140
Units per Pallet	700

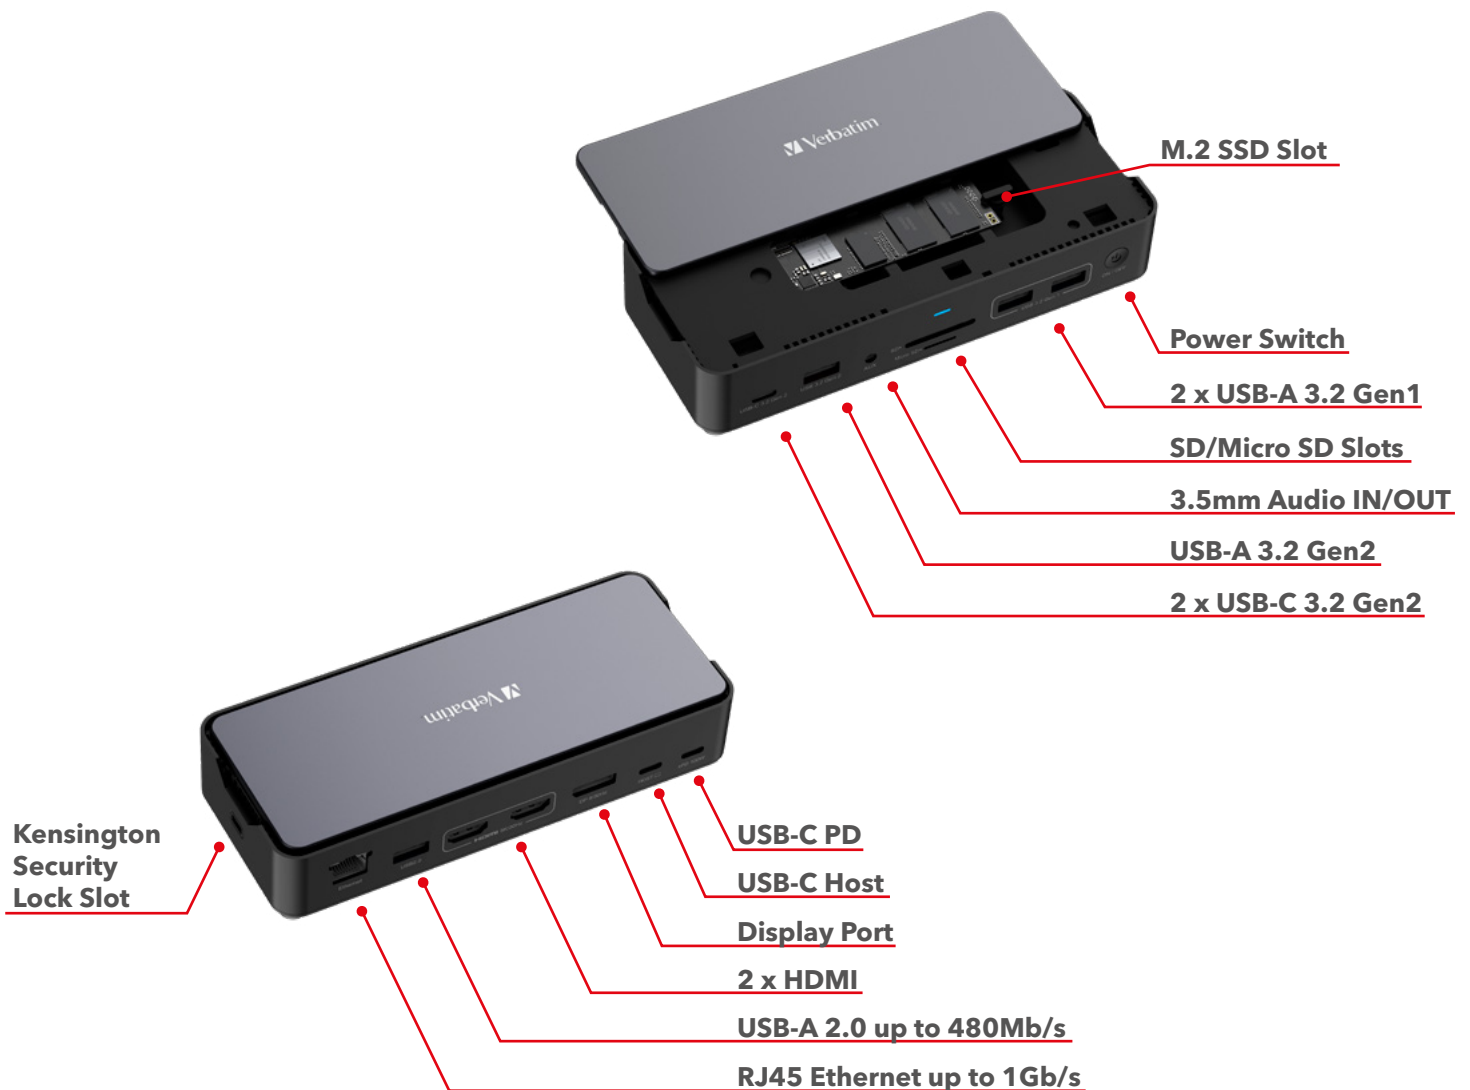

USB-C™ Pro Docking Station 15 Port with SSD Slot

CDS-15S

Verbatim
Technology you can trust



Front Angled



Front Angled Open



Back Angled



Connections



Angle Open Lit



Top Angled Open



Packaging 3D



Packaging Flat



Lifestyle 1



Lifestyle 2



Lifestyle 5



Lifestyle 4

Pack Contents:

- USB-C Pro Docking Station
- USB-C to USB-C Cable
- Quick Start Guide

System Requirements

- USB-C host port
- Windows 11, 10 or higher or
Mac OS X 10.2 or higher

Warranty

- 2 year limited warranty

For more information, please
contact your key account manager

Publication date: 23-01-2024
© 2024 Verbatim. All rights reserved.
All brand names are registered trademarks of their respective owners.
Unauthorized use strictly prohibited.
Specifications are subject to change without prior notice.