

HPE Aruba Networking 750 Series Campus Access Points QuickSpecs


Flagship Wi-Fi 7 access points for high performance, high-capacity, resiliency, and secure wireless connectivity

Ideal for the most demanding users and applications, the HPE Aruba Networking 750 Series Campus Access Points deliver secure, resilient, and high performance Wi-Fi 7 connectivity. The flagship 750 series deliver up to 18.7 Gbps maximum tri-band aggregate data rate and goes beyond the Wi-Fi 7 standard to take full advantage of the 6 GHz band, connect more Internet of Things (IoT) devices, strengthen security across wired and wireless, and enable highly accurate location aware capabilities.

Overview

HPE Aruba Networking Central helps drive efficient operations and provides AI-automation and machine learning (ML) insights for improved wireless connectivity.

Unique to HPE Aruba Networking, the 750 series access points include ultra tri-band (UTB) filtering and dual 10 Gbps Ethernet ports to help eliminate coverage gaps, provide greater resiliency, and deliver fast, secure connectivity.

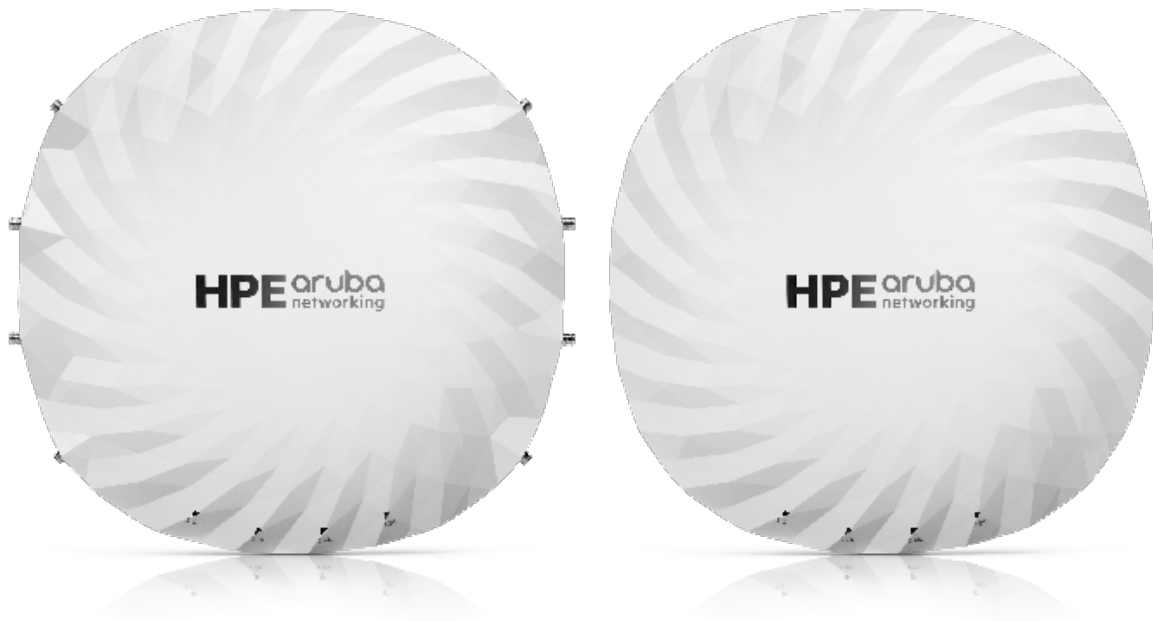

HPE Aruba Networking 750 Series Campus Access Points

Overview

Key Features

- Wi-Fi 7 (802.11be) brings multi-link operation (MLO) for channel aggregation, 4K QAM for higher throughput and lower latency, and unlocks the 6 GHz band to more than double the available capacity
- Three 4x4 MIMO radios provide tri-band coverage across 2.4 GHz, 5 GHz, and 6 GHz to deliver 18.7 Gbps maximum tri-band aggregate data rate
- Capable of up to 28.8 Gbps maximum aggregate data rate using optional dual 5 GHz and 6 GHz radio modes¹
- Up to three 320 MHz channels in 6 GHz support low-latency, bandwidth-hungry applications like high-definition video and augmented reality/virtual reality applications
- Patented Ultra Tri-Band (UTB) filtering enables 5 GHz and 6 GHz to operate without restrictions or interference
- High availability with dual HPE Smart Rate ports for redundant Ethernet and power. Configurable to 1, 2.5, 5, or 10 Gbps (or 100Mbps)
- IoT-ready platform with two integrated Bluetooth 5.4 and 802.15.4/ Zigbee radios and two USB-port extensions
- Built in GNSS receiver, barometric pressure sensor, and intelligent software enable APs to self-locate and act as reference points for accurate indoor location measurements
- MACsec support¹ extends wired Ethernet protection to the access point
- Offered as optional eco-friendly 5-packs
- AI-powered dynamic power save mode helps reduce energy use

Notes: ¹Feature available in a future software release.

Standard Features

AI-powered Wi-Fi 7

Managing Wi-Fi 7 access points is easier with HPE Aruba Networking Central that provides intelligent automation, AI insights, and unified infrastructure management. The 750 series is supported by HPE Aruba Networking Wireless Operating System (AOS 10).

More Capacity and Wider Channels

The HPE Aruba Networking 750 Series Campus Access Points are designed to take advantage of the 6 GHz band via three 4x4 MIMO radios, which translates into far greater speeds over the 2.4 and 5 GHz bands, wider channels for multi-gigabit traffic, and less interference. It delivers up to 18.7 Gbps maximum tri-band aggregate data rate, using three 4x4 MIMO radios (2.4 GHz, 5 GHz, and 6 GHz).

To further increase the wireless capacity, the 2.4 GHz radio can be reconfigured to deliver an optional dual-5 GHz or dual-6 GHz mode, which further increases the maximum aggregate data rate to 28.8 Gbps in dual 6 GHz mode.

Notes: Feature available in a future software release

Band	Channel Bandwidth	Peak Data Rate
6GHz	320 MHz	11.5 Gbps
5GHz	160 MHz	5.8 Gbps
2.4GHz	20 MHz	688 Mbps
	40 MHz	1.4 Gbps
Total using 2.4 GHz with 20 MHz		18.0 Gbps
Total using 2.4 GHz with 40 MHz		18.7 Gbps
Total using dual 6 GHz (no 2.4 GHz) ¹		28.8 Gbps

Powerful 4x4 MIMO Radios

It is able to sustain 3- and 4-spatial stream data rates with clients that support it. It also supports 4-spatial stream MU-MIMO with two 2SS client devices (or up to four 1SS devices) and adds MIMO redundancy when using 2SS client devices to increase likelihood of 2SS rates versus slower 1SS data rate.

Wi-Fi 7 Standard

The new Wi-Fi 7 standard (802.11be) extends the capabilities of Wi-Fi 6E, including the use of the 6 GHz band. New capabilities include wide 320 MHz bandwidth channels, multi-link operation (MLO) for channel aggregation across different bands and failover, and 4096 QAM (4K QAM) for higher peak data rates.

Advantages of 6 GHz

Wi-Fi 7 takes advantage of up to 1200 MHz in the 6 GHz band for higher throughput and improved application performance. With up to three 320 MHz channels or seven 160 MHz channels, Wi-Fi 7 can better support low-latency, bandwidth hungry applications like high-definition video and artificial reality/virtual reality applications. Only Wi-Fi 6E or 7 capable devices can use the 6 GHz band so there is no interference or slowdowns due to legacy devices.

Standard Features

Device Class Support

The AP-755 access points with integrated antennas are part of the Low Power Indoor (LPI) device class. This fixed indoor-only class uses lower power levels and does not require an Automated Frequency Coordination service (AFC) to manage incumbent outdoor services which is required for standard class APs. The AP-754 connectorized models will typically operate as Standard Power access points but may also be allowed to operate as Low Power Indoor devices in some countries.

Less Interference

HPE Aruba Networking 750 Series Campus Access Points include HPE Aruba Networking patented UTB filtering, which enables enterprises to take advantage of the high end of 5 GHz with the lower end of 6 GHz without experiencing interference.

Because there is only 50 MHz spacing between the 5 GHz and 6 GHz bands, without advanced filtering, enterprises would likely experience problems between the bands and would therefore be limited in the number of channels available. By applying advanced filtering capabilities, enterprises can fully utilize the available spectrum without creating coverage gaps or islands.

Global Readiness

While the need for more Wi-Fi capacity is recognized across the globe, countries are approaching 6 GHz differently. The HPE Aruba Networking 750 Series Campus Access Points are set up to automatically update regulatory rules once Wi-Fi 7 regulations have been approved and certified.

Business Continuity

The HPE Aruba Networking 750 Series Campus Access Points provide high availability with two 10GbE ports for hitless failover for both data and power. Configurable to 1, 2.5, 5, or 10 Gbps (or 100 Mbps), these dual ports provide business continuity for mission-critical applications.

Advantages of OFDMA

This capability allows HPE Aruba Networking access points to handle multiple 802.11be capable clients on each channel simultaneously, regardless of device or traffic type. Channel utilization is optimized by handling each transaction through smaller subcarriers or resource units (RUs), which means that clients are sharing a channel and not competing for airtime and bandwidth.

Wi-Fi Optimization

Client optimization

The patented AI- powered HPE Aruba Networking Central ClientMatch technology helps eliminate sticky client issues by steering a client to the access point where it receives the best radio signal. HPE Aruba Networking ClientMatch steers traffic from the noisy 2.4 GHz band to the preferred 5 GHz or 6 GHz band depending on client capabilities. HPE Aruba Networking ClientMatch also dynamically steers traffic to load balance access points to improve the user experience.

Automated Wi-Fi radio frequency management

To optimize the user experience and provide greater stability, HPE Aruba Networking AirMatch allows organizations to automate network optimization using machine learning (ML). HPE Aruba Networking AirMatch provides dynamic

Standard Features

bandwidth adjustments to support changing device density, enhanced roaming using an even distribution of effective isotropic radiated power (EIRP) to radios, and real-time channel assignments to mitigate co-channel interference.

HPE Aruba Networking Advanced Cellular Coexistence

Unique HPE Aruba Networking Advanced Cellular Coexistence (ACC) uses built-in filtering to automatically reduce the impact of interference from cellular networks, distributed antenna systems (DAS), and commercial small cell or femtocell equipment.

AI-powered Dynamic Power Save mode

Access points switch into a dynamic power save mode and automatically wake up at a schedule when connectivity demand arises, reducing power demands and saving money in alignment with the organization's sustainability initiatives.

Intelligent Power Monitoring (IPM)

For better insights into energy consumption, HPE Aruba Networking access points continuously monitor and report hardware energy usage. Unlike other vendor's access points, HPE Aruba Networking access points can also be configured to enable or disable capabilities based on available Power over Ethernet (PoE) power — ideal when wired switches have exhausted their power budget. Enterprises can deploy Wi-Fi 7 access points and update switching and power later if needed based on their actual usage.

Self-locating Access Points

Indoor location shouldn't require guesswork or costly, complex overlay technologies. HPE Aruba Networking Wi-Fi 6/6E and Wi-Fi 7 access points help organizations leverage their wireless investment to deliver indoor location capabilities everywhere.

As part of HPE Aruba Networking indoor location solutions, they serve as reference points for client devices and other technologies using fine time measurement (FTM).

Open Locate, an emerging standard that allows access points to share their location over the air, enables mobile devices to use Wi-Fi FTM or Bluetooth (BLE) to calculate their own location and apply location coordination information in a variety of applications including wayfinding, asset tracking, and employee safety.

The 750 series access points support FTM 802.11az for sub one-meter accuracy and include a GNSS receiver and built-in barometric sensor to enable APs to automatically place themselves on floor plan maps in HPE Aruba Networking Central, helping eliminate manual effort and error.

Notes: Feature available in a future software release.

Access Points as Flexible and Secure IoT-Ready Platform

By combining IoT radios with a Zero Trust network framework, the HPE Aruba Networking 750 Series Campus Access Points can serve as flexible IoT platforms that bolster network security, provide coverage for a broad range of IoT devices, and help eliminate the need for network overlays just for IoT devices.

The 750 series includes two integrated Bluetooth 6 and 802.15.4 radios for Zigbee support to simplify deploying and managing IoT-based location services, asset tracking services, security solutions, and IoT sensors. There are also two

Standard Features

USB-port extensions providing up to 10W for IoT connectivity to a wide range of devices. These IoT capabilities allow organizations to leverage the access points as an IoT platform, which helps eliminate the need for an overlay infrastructure and opens opportunities to accelerate IoT initiatives.

In addition, Target Wake Time (TWT) establishes a schedule for when clients need to communicate with an access point. This helps improve client power savings and reduces airtime contention with other clients, which is ideal for IoT.

Streamline IoT Operations

HPE Aruba Networking Central IoT Operations is a service for APs running Wireless Operating System AOS-10. This unifies visibility of IT and OT infrastructure within the network health dashboard by extending network monitoring and insights to BLE, Zigbee, and other non-IP IoT devices. It helps streamline non-Wi-Fi device onboarding and data collection.

AI Client Insights

ML-based classification of all clients and IoT devices via Client Insights uses deep packet inspection to provide additional context and behavioral information to help ensure devices are receiving proper policy enforcement and continuously monitor for rogue devices.

Technology Partnerships

A broad ecosystem of technology partners provides interoperability for easier installations and operations and certified solutions are available to help digital transformation and extend capabilities of network infrastructure.

Security Built-in

The 750 series access points include security capabilities such as:

WPA3 and Enhanced Open

Support for stronger encryption and authentication is provided via the latest version of WPA for enterprise-protected networks. Enhanced Open offers seamless new protection for users connecting to open networks where each session is automatically encrypted to protect user passwords and data on guest networks.

WPA2-MPSK

MPSK enables simpler passkey management for WPA2 devices — should the Wi-Fi password on one device or device type change, no additional changes are needed for other devices. This capability requires ClearPass Policy Manager.

10 GbE Port with MACsec

MACsec support extends wired Ethernet encryption to the access point using the 10 Gbps port.

Notes: Feature available in a future software release.

Trusted Platform Module (TPM)

For enhanced device assurance, all HPE Aruba Networking access points include an installed Trusted Platform Module (TPM). A TPM is a secure hardware component that performs cryptographic operations and stores sensitive keys to ensure platform integrity, secure boot, TPM-based identity binding for anti-counterfeiting and trusted attestation.

Standard Features

User and Device Authentication

Cloud-native Network Access Control (NAC) provided by HPE Aruba Networking Central further simplifies how IT controls network access while providing a frictionless experience for end users. Global policy automation and orchestration enables IT to define and maintain global policies at scale with ease, using UI-driven, intuitive workflows that automatically translate security intent into policy design and map user roles for employees, contractors, guests, and devices to their proper access privileges.

Intrusion Detection

HPE Aruba Networking Central utilizes the Rogue AP Intrusion Detection Service (RAPIDS) to identify and resolve issues caused by rogue APs and clients. Wired and wireless data is automatically correlated to identify potential threats, thereby strengthening network security and improving incident response processes by reducing false positives.

Web Content Filtering

Web Content Classification (WebCC) classifies websites by content category and rates them by reputation and risk score, enabling IT to block malicious sites to help prevent phishing, DDoS, botnets, and other common attacks.

Simple and Secure Access

To improve security and ease of management, IT can centrally configure and automatically enforce role-based policies that define proper access privileges for employees, guests, contractors, and other user groups — no matter where users connect on wired and WLANs. Dynamic Segmentation helps eliminate the time consuming and error-prone task of managing complex and static VLANs, ACLs, and subnets by dynamically assigning policies and keeping traffic secure and separated.

Seamless Handoffs to Cellular

Built on the technical foundations of Passpoint® and Wi-Fi Calling, HPE Aruba Networking Air Pass creates a roaming network across the HPE Aruba Networking enterprise customer footprint, extending cellular coverage and enhancing the visitor and subscriber experience to deliver a great experience for your guests while helping to reduce costs and management overhead for DAS.

Optimize with AOS-10

Cloud-native HPE Aruba Networking Wireless Operating System AOS-10 is the distributed network operating system working with HPE Aruba Networking Central that acts as the control layer for HPE Aruba Networking access points and gateways.

With its flexible architecture, IT can deliver reliable and secure wireless connectivity for small offices, mid-sized branches, large campus environments, and remote workers. Working in tandem with cloud-native HPE Aruba Networking Central, OS-10 provides the WLAN management and control to deliver greater scalability, security, and AI-powered optimization. Using OS-10 together with cloud-based Central for management and orchestration reduces processing required by the on-site gateways to manage clients and access points.

Standard Features

Enterprises can then optimize gateway deployments with fewer gateways in very large environments with thousands of access points and devices.

Flexible Operation and Management

Our unified APs can operate as stand-alone access points or with a gateway for greater scalability, security, and manageability. Access points can be deployed using Zero Touch Provisioning — without on-site technical expertise — for ease of implementation in branch offices and for remote work.

HPE Aruba Networking access points can be managed using cloud-based solutions for any campus, branch, or remote work environment. HPE Aruba Networking Central provides a single pane of glass for overseeing every aspect of wired and wireless LANs, WANs, and VPNs. AI-powered analytics, end-to-end orchestration and automation, and advanced security features are built natively into the solution.

Simplified, Flexible Consumption

The 750 series access points require HPE Aruba Networking Central subscription-based licenses, which are purchased on a per-device basis for APs. Licenses are available in 1-, 3-, 5-, 7-, and 10-year increments, making it easy to align requirements for AIOps, security, and other desired management features. HPE Aruba Networking Wireless Operating System (OS 10) is included in the subscription.

Summary

For enterprises looking for the highest performance Wi-Fi, the flagship HPE Aruba Networking 750 Series Campus Access Points deliver more wireless capacity by taking advantage of Wi-Fi 7 features, the 6 GHz band, and a powerful architecture featuring three 4x4 MIMO radios. They support high-density IoT integration with dual IoT radios and dual USB ports, provide highly precise locating with built-in GNSS receivers, barometric sensors, and fast wired connectivity with dual 10 Gbps Ethernet ports.

Unique to HPE Aruba Networking, the HPE Aruba Networking Wireless Operating System (OS 10) based 750 series access points include UTB filtering and dual 10 Gbps Ethernet ports to help eliminating coverage gaps, providing greater resiliency, and delivering fast, secure connectivity.

Configuration Information

Access Point Models**755 Internal Antenna Access Points****Description**

HPE Aruba Networking AP-755 (EG) Tri Radio 4x4 Wi-Fi 7 Internal Antennas Campus Access Point	SKU S1G81A
HPE Aruba Networking AP-755 (IL) Tri Radio 4x4 Wi-Fi 7 Internal Antennas Campus Access Point	S1G82A
HPE Aruba Networking AP-755 (JP) Tri Radio 4x4 Wi-Fi 7 Internal Antennas Campus Access Point	S1G83A
HPE Aruba Networking AP-755 (RW) Tri Radio 4x4 Wi-Fi 7 Internal Antennas Campus Access Point	S1G84A
HPE Aruba Networking AP-755 (US) Tri Radio 4x4 Wi-Fi 7 Internal Antennas Campus Access Point	S1G85A
HPE Aruba Networking AP-755 (ID) Tri Radio 4x4 Wi-Fi 7 Internal Antennas Campus Access Point	S5E16A

[Add Mount Kit](#)**755 Internal Antenna Access Points - 5-Pack Eco-Friendly Bundle****Description**

HPE Aruba Networking AP-755 (RW) Tri Radio 4x4 Wi-Fi 7 Internal Antennas 5-pack Campus Access Point	SKU SOH10A
HPE Aruba Networking AP-755 (US) Tri Radio 4x4 Wi-Fi 7 Internal Antennas 5-pack Campus Access Point	SOH11A

[Add 5 mount kits; eco-pack includes one JY728A console adapter cable](#)**754 External Antenna Campus Access Points****Description**

HPE Aruba Networking AP-754 (EG) Tri Radio 4x4 Wi-Fi 7 External Antennas Campus Access Point	SKU S1G71A
HPE Aruba Networking AP-754 (IL) Tri Radio 4x4 Wi-Fi 7 External Antennas Campus Access Point	S1G72A
HPE Aruba Networking AP-754 (JP) Tri Radio 4x4 Wi-Fi 7 External Antennas Campus Access Point	S1G73A
HPE Aruba Networking AP-754 (RW) Tri Radio 4x4 Wi-Fi 7 External Antennas Campus Access Point	S1G74A
HPE Aruba Networking AP-754 (US) Tri Radio 4x4 Wi-Fi 7 External Antennas Campus Access Point	S1G75A

[Add Mount Kit, add antennas](#)**755 Internal Antenna Access Points - TAA Models****Description**

HPE Aruba Networking AP-755 (EG) Tri Radio 4x4 Wi-Fi 7 Internal Antennas TAA Campus Access Point	SKU S1G86A
HPE Aruba Networking AP-755 (IL) Tri Radio 4x4 Wi-Fi 7 Internal Antennas TAA Campus Access Point	S1G87A
HPE Aruba Networking AP-755 (JP) Tri Radio 4x4 Wi-Fi 7 Internal Antennas TAA Campus Access Point	S1G88A
HPE Aruba Networking AP-755 (RW) Tri Radio 4x4 Wi-Fi 7 Internal Antennas TAA Campus Access Point	S1G89A
HPE Aruba Networking AP-755 (US) Tri Radio 4x4 Wi-Fi 7 Internal Antennas TAA Campus Access Point	S1G90A

[Add Mount Kit](#)

Configuration Information

754 External Antenna Campus Access Points - TAA Models

Description	SKU
HPE Aruba Networking AP-754 (EG) Tri Radio 4x4 Wi-Fi 7 External Antennas TAA Campus Access Point	S1G76A
HPE Aruba Networking AP-754 (IL) Tri Radio 4x4 Wi-Fi 7 External Antennas TAA Campus Access Point	S1G77A
HPE Aruba Networking AP-754 (JP) Tri Radio 4x4 Wi-Fi 7 External Antennas TAA Campus Access Point	S1G78A
HPE Aruba Networking AP-754 (RW) Tri Radio 4x4 Wi-Fi 7 External Antennas TAA Campus Access Point	S1G79A
HPE Aruba Networking AP-754 (US) Tri Radio 4x4 Wi-Fi 7 External Antennas TAA Campus Access Point	S1G80A

Mount Accessories

AP Mount Kits

Description	SKU
HPE Aruba Networking AP-MNT-U Campus Access Point Type U Universal Mount Bracket Kit	S4K79A
HPE Aruba Networking AP-MNT-MP10-U Campus AP Universal 10-pack Mount Bracket Kit	SOJ40A
HPE Aruba Networking AP-MNT-A Campus AP Type A Suspended Ceiling Rail Flat 9/16 Mount Bracket Kit	R3J15A
HPE Aruba Networking AP-MNT-MP10-A Campus AP 10-Pack 9/16 Flat Ceiling Rail Mount Bracket Kit	JZ370A
HPE Aruba Networking AP-MNT-B Campus AP Type B Suspended Ceiling Rail Flat 15/16 Mount Bracket Kit	R3J16A
HPE Aruba Networking AP-MNT-MP10-B Campus AP 10-Pack 15/16 Flat Ceiling Rail Mount Bracket Kit	Q9G69A
HPE Aruba Networking AP-MNT-MP10-B1 Campus AP 10-Pack 15/16 Adj Flat Ceiling Rail Mount Bracket Kit	R6T34A
HPE Aruba Networking AP-MNT-C Campus AP Type C Suspended Ceiling Rail 9/16 Profile Mnt Bracket Kit	R3J17A
HPE Aruba Networking AP-MNT-MP10-C Campus AP 10-Pack Profile 9/16 Ceiling Rail Mount Bracket Kit	Q9G70A
HPE Aruba Networking AP-MNT-D Campus AP Type D Solid Surface Mount Bracket Kit	R3J18A
HPE Aruba Networking AP-MNT-MP10-D Campus AP 10-Pack Solid Surface Mount Bracket Kit	Q9G71A
HPE Aruba Networking AP-MNT-E Campus AP Type E Wall-Box Mount Bracket Kit	R3J19A
HPE Aruba Networking AP-MNT-MP10-E Campus AP 10-Pack Wall-box Mount Bracket Kit	R1C72A

Antennas

Antennas

Description	SKU
HPE Aruba Networking AP-ANT-311 Direct-Mount RP-SMA Tri-Band 1x1 Omni Dipole Antenna	S1F79A
HPE Aruba Networking AP-ANT-312 Direct-Mount RP-SMA Tri-Band 1x1 Low-Profile Omni Dipole Antenna	S1F80A
HPE Aruba Networking AP-ANT-313 Cabled RP-SMA Tri-Band 1x1 Omni Dipole Antenna	S1F81A
HPE Aruba Networking AP-ANT-340 Cabled RP-SMA Tri-Band 4x4 Downtilt Omni Ceiling Antenna	S1F82A

Configuration Information

HPE Aruba Networking AP-ANT-345 Cabled RP-SMA Tri-Band 4x4 Medium Gain Directional Panel Antenna	S1F83A
HPE Aruba Networking AP-ANT-348 Cabled RP-SMA Tri-Band 4x4 High Gain Directional Panel Antenna	S1F84A

Antenna Mount Kits

For 754 Series Std (Min 0 // max 2) User Selection (min 0 // max 2)

Description	SKU
HPE Aruba Networking AP-ANT-MNT-U Universal AZ/EL Adjustable Antenna Pole Wall Mount Kit	S1J09A

Power Options

Power Options

Description	SKU
HPE Aruba Networking AP-AC2-12B 12V/48W AC/DC Desktop Style Power Adapter with 2.1/5.5mm Connector	R3K00A
HPE Aruba Networking AP-POE-BT10 1-port 10G 60W Midspan 802.3bt PoE Injector	S3J26A

Accessories

Snap-on Covers

Description	SKU
HPE Aruba Networking AP-750-CVR-20 Access Point 20-pack White Non-Glossy Snap-On Covers Kit contains 20 optional snap-on covers	S1H26A

Other Accessories

Description	SKU
HPE Aruba Networking AP-CBL-EXT10 10-pack CAT6A Ethernet Extension Cables 10-pack Extension Cables	R8L34A
HPE Aruba Networking AP-CBL-SERU Micro-USB TTL3.3V to USB2.0 AP Console Adapter Cable Drivers available on the Support Center	JY728A
HPE Aruba Networking AP-MOD-SERU Micro-USB TTL3.3V to RJ45 RS232 AP Console Adapter Module	R6Q99A
HPE Aruba Networking AP-MNT-MP10-AP Campus AP 10-Pack Mount Brace Spare Kit	SOJ39A

Software

HPE Aruba Networking Central

Cloud Services / Access Point Foundation Subscriptions

Description	SKU
HPE Aruba Networking Central AP Foundation 1-year Subscription E-STU	Q9Y58AAE
HPE Aruba Networking Central AP Foundation 3 year Subscription E-STU	Q9Y59AAE
HPE Aruba Networking Central AP Foundation 5 year Subscription E-STU	Q9Y60AAE
HPE Aruba Networking Central AP Foundation 7 year Subscription E-STU	Q9Y61AAE
HPE Aruba Networking Central AP Foundation 10 year Subscription E-STU	Q9Y62AAE

Configuration Information

Cloud Services / Access Point Advanced Subscriptions

Description	SKU
HPE Aruba Networking Central AP Advanced 1 year Subscription E-STU	Q9Y63AAE
HPE Aruba Networking Central AP Advanced 3 year Subscription E-STU	Q9Y64AAE
HPE Aruba Networking Central AP Advanced 5 year Subscription E-STU	Q9Y65AAE
HPE Aruba Networking Central AP Advanced 7 year Subscription E-STU	Q9Y66AAE
HPE Aruba Networking Central AP Advanced 10 year Subscription E-STU	Q9Y67AAE

On-Prem Services / Access Point Foundation Subscriptions

Description	SKU
HPE Aruba Networking Central on Prem AP Foundation 1 year Subscription E-STU	R6U63AAE
HPE Aruba Networking Central on Prem AP Foundation 3 year Subscription E-STU	R6U64AAE
HPE Aruba Networking Central on Prem AP Foundation 5 year Subscription E-STU	R6U65AAE
HPE Aruba Networking Central on Prem AP Foundation 7 year Subscription E-STU	R6U66AAE
HPE Aruba Networking Central on Prem AP Foundation 10 year Subscription E-STU	R6U67AAE

On-Prem Services / Access Point Foundation Government Subscriptions

Description	SKU
HPE Aruba Networking COP AP Foundation Government 1-year Subscription E-STU	S1P56AAE
HPE Aruba Networking COP AP Foundation Government 3-year Subscription E-STU	S1P57AAE
HPE Aruba Networking COP AP Foundation Government 5-year Subscription E-STU	S1P58AAE
HPE Aruba Networking COP AP Foundation 7-year Government Subscription E-STU	S1P59AAE
HPE Aruba Networking COP AP Foundation 10-year Government Subscription E-STU	S1P60AAE

As-a-Service

HPE Aruba Networking Central

Cloud Services / Access Point Foundation Subscriptions

HPE Aruba Networking Central AP Foundation 1 year Subscription SaaS	Q9Y58AAS
HPE Aruba Networking Central AP Foundation 3 year Subscription SaaS	Q9Y59AAS
HPE Aruba Networking Central AP Foundation 5 year Subscription SaaS	Q9Y60AAS
HPE Aruba Networking Central AP Foundation 7 year Subscription SaaS	Q9Y61AAS
HPE Aruba Networking Central AP Foundation 10 year Subscription SaaS	Q9Y62AAS

Cloud Services / Access Point Advanced Subscriptions

HPE Aruba Networking Central AP Advanced 1 year Subscription SaaS	Q9Y63AAS
HPE Aruba Networking Central AP Advanced 3 year Subscription SaaS	Q9Y64AAS
HPE Aruba Networking Central AP Advanced 5 year Subscription SaaS	Q9Y65AAS
HPE Aruba Networking Central AP Advanced 7 year Subscription SaaS	Q9Y66AAS
HPE Aruba Networking Central AP Advanced 10 year Subscription SaaS	Q9Y67AAS

Technical Specifications

Hardware Variants

- AP-754: External antenna models
 - AP-755: Internal antenna models.
-

Wi-Fi Radio Specifications

- AP type: Indoor, tri radio, 2.4 GHz, 5 GHz and 6 GHz (concurrent) 802.11be 4x4 MIMO
- 2.4 GHz radio: Four spatial stream MIMO for up to 1.4 Gbps wireless data rate with 4SS EHT40 802.11be client devices
- 5 GHz radio: Four spatial stream MIMO for up to 5.8 Gbps wireless data rate with 4SS EHT160 802.11be client devices
- 6 GHz radio: Four spatial stream MIMO for up to 11.5 Gbps wireless data rate with 4SS EHT320 802.11be client devices
- MU-MIMO (downlink, uplink) is supported on all radios
- Up to 512 associated client devices per radio, and up to 16 BSSIDs per radio
- Supported frequency bands (country-specific restrictions apply): 2.400 to 2.4835 GHz ISM
 - 5.150 to 5.250 GHz U-NII-1
 - 5.250 to 5.350 GHz U-NII-2
 - 5.470 to 5.725 GHz U-NII-2E
 - 5.725 to 5.850 GHz U-NII-3/ISM
 - 5.850 to 5.895 GHz U-NII-4
 - 5.925 to 6.425 GHz U-NII-5
 - 6.425 to 6.525 GHz U-NII-6
 - **Notes: The U-NII-6 band is not supported when the AP-755 is configured for dual-6 GHz mode**
 - 6.525 to 6.875 GHz U-NII-7
 - 6.875 to 7.125 GHz U-NII-8
- When the AP is configured in dual-5 GHz mode¹, one radio covers U-NII-1 and -2, while a second radio covers U-NII-2E, -3/ISM and -4. The third radio covers the full 6 GHz band.
- When the AP is configured in dual-6 GHz mode¹, one radio covers U-NII-5, while a second radio covers U-NII-7 and -8. The third radio covers the full 5 GHz band.
- Available bands and channels: Dependent on configured regulatory domain (country)
- Dynamic frequency selection (DFS) optimizes the use of available RF spectrum in the 5 GHz band
 - Including Zero-Wait DFS (ZWDFS) to accelerate channel changes
- Supported radio technologies: 802.11b: Direct-sequence spread-spectrum (DSSS)
 - 802.11a/g/n/ac: Orthogonal frequency-division multiplexing (OFDM)
 - 802.11ax/be: Orthogonal frequency-division multiple access (OFDMA) with up to 37 resource units
- Supported modulation types: 802.11b: BPSK, QPSK, CCK
 - 802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM and 256-QAM (proprietary extension)
 - 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM and 1024-QAM (proprietary extension)
 - 802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, and 1024-QAM
 - 802.11be: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, and 4096-QAM
 - 802.11n high throughput (HT) support: HT20/40
 - 802.11ac very high throughput (VHT) support: VHT20/40/80/160
 - 802.11ax high efficiency (HE) support: HE20/40/80/160
 - 802.11be extreme high throughput (EHT) support: EHT20/40/80/160/320
- Supported data rates (Mbps): 802.11b: 1, 2, 5.5, 11

Technical Specifications

- 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54
- 802.11n: 6.5 to 600 (MCS0 to MCS15, HT20 to HT40)
- 802.11ac: 6.5 to 3,467 (MCS0 to MCS9, NSS = 1 to 4, VHT20 to VHT160)
- 802.11ax: 7.3 to 4,804 (MCS0 to MCS11, NSS = 1 to 4, HE20 to HE160)
- 802.11be: 7.3 to 11,530 (MCS0 to MCS13, NSS = 1 to 4, EHT20 to EHT320)
- 802.11n/ac packet aggregation: A-MPDU, A-MSDU
- Transmit power: Configurable in increments of 0.5 dBm
- Maximum (aggregate, conducted total) transmit power (limited by local regulatory requirements)
 - Per radio/band (2.4 GHz/5 GHz/6 GHz): +24 dBm (18 dBm per chain)

Notes: Conducted transmit power levels exclude antenna gain. For total (EIRP) transmit power, add antenna gain.
- Advanced Cellular Coexistence (ACC) minimizes the impact of interference from cellular networks
- Ultra Tri-Band (UTB) enables ultimate flexibility in 5 GHz and 6 GHz channel selection without performance degradation
- Maximum ratio combining (MRC) for improved receiver performance
- Cyclic delay/shift diversity (CDD/CSD) for improved downlink RF performance
- Space-time block coding (STBC) for increased range and improved reception
- Low-density parity check (LDPC) for high-efficiency error correction and increased throughput
- Transmit beam-forming (TxBF) for increased signal reliability and range
- 802.11ax Target Wait Time (TWT) to support low-power client devices
- 802.11mc/az Fine Timing Measurement (FTM) for precision distance ranging

Wi-Fi Antennas

- AP-754: Two sets of four (female) RP-SMA connectors for external antennas (A0 through A3 corresponding with radio chains 0 through 3 for the 2.4 GHz and 5 GHz radios, and B0 through B3 corresponding with radio chains 0 through 3 for the 6 GHz radio). Worst-case internal loss between radio interface and external antenna connectors: 1.1dB in 2.4 GHz, 1.8dB in 5 GHz, and 2.8dB in 6 GHz.
- AP-755: Integrated downtilt omni-directional antennas for 4x4 MIMO with peak antenna gain of 5.3dBi in 2.4 GHz, 6.0dBi in 5 GHz and 6.0dBi in 6 GHz. Built-in antennas are optimized for horizontal ceiling mounted orientation of the AP. The downtilt angle for maximum gain is roughly 30 to 40 degrees.
 - Combining the patterns of each of the antennas of the MIMO radios, the peak gain of the combined, average pattern is 3.1dBi in 2.4 GHz, 3.6dBi in 5 GHz and 3.6dBi in 6 GHz.

Other Interfaces and Features

- E0, E1: Two Ethernet wired network ports (RJ-45)
 - Auto-sensing link speed (100/1000/2500/5000/10000BASE-T) and MDI/MDIX
 - PoE-PD: 48Vdc (nominal) 802.3af/at/bt PoE (class 3 or higher)
 - 802.3az Energy Efficient Ethernet (EEE)
 - Link aggregation (LACP) support between both network ports for redundancy and increased capacity
 - MACsec support on E0 (802.1ae)
- DC power interface: 12Vdc (nominal, +/- 5%), accepts 2.1mm/5.5mm center-positive circular plug with 9.5mm length
- U0, U1: Two USB 2.0 host interface (Type A connector)
 - Capable of sourcing up to 2A/10W to one or two attached devices

Technical Specifications

- Flexible dual IOT radio options: BLE 5.4 (w/HADM), plus either BLE 5.4 or 802.15.4/Zigbee:
 - BLE: BT5.4 with up to 11dBm transmit power (class 1) and -105dBm receive sensitivity (125 kbps)
 - IEEE 802.15.4/Zigbee: up to 12dBm transmit power and -97dBm receive sensitivity (250 kbps)
 - Integrated omnidirectional antenna with roughly 30 to 40 degrees downtilt and peak gain of 5.6dBi (AP-754) or 6.0dBi (AP-755)
 - GNSS L1 (1575.42 MHz) and L5 (1176.45 MHz) receiver supporting GPS, Galileo, GLONASS, and BeiDou signal
 - Receive sensitivity: -165dBm (tracking)
 - Integrated omnidirectional antenna with roughly 30 to 40 degrees downtilt and peak gain of 3.0dBi (AP-754) or 4.1dBi (AP-755)
 - Integrated barometric pressure sensor to determine (relative) deployment altitude of the AP
 - Advanced IoT Coexistence (AIC) allows concurrent operation of multiple radios in the 2.4 GHz band
 - Built-in Trusted Platform Module (TPM) for enhanced device assurance.
 - Visual indicators (four multi-color LEDs): for System (1x) and Radio (3x) status
 - Reset button: factory reset, LED mode control (normal/off)
 - Serial console interface (proprietary, micro-B USB physical jack)
 - Kensington security slot
 - Automatic thermal shutdown and recovery function
-

Power sources and power consumption

- The AP supports direct DC power and Power over Ethernet (PoE) on port EO and/or E1
 - When both DC and PoE power sources are available, DC power takes priority over PoE
 - Power sources are sold separately; see the HPE Aruba Networking 750 Series Ordering Guide for details
 - When powered by DC or 802.3bt (class 6) PoE, the AP will operate without restrictions
 - Operating the AP with a single 802.3af (class 3 or lower) POE source is not supported, regardless of IPM status (except for AP staging)
 - With IPM enabled, the AP will start up in unrestricted mode but may dynamically apply restrictions depending on the available power budget and actual consumption. The feature restrictions and order in which these get applied are configurable
 - Maximum (worst case) power consumption (without/with USB devices attached):
 - DC powered: 35W/46W.
 - PoE powered: 40W/51W.
 - This assumes that up to 10W is supplied to the attached USB device(s).
 - Maximum (worst-case) power consumption in idle mode: 14W/25W (DC) or 12W/23W (PoE).
 - Maximum (worst-case) power consumption in deep-sleep mode: 2.4W (DC) or 3.5W (PoE).
-

Technical Specifications

Using IPM to Avoid Platform Restrictions

Operating the 750 series access point from a single 802.3at source requires some restrictions, but the IPM feature allows doing that in a flexible way.

The following configurations (with IPM enabled) are some examples of how the access point can remain within the 802.3at budget without any additional restrictions:

- No power drawn from USB, transmit power on all radios limited to 18 dBm EIRP or less.
- No power drawn from USB, single Ethernet, transmit power on all radios limited to 21 dBm EIRP or less.
- No power drawn from USB, single Ethernet, any one radio disabled.

Table 2. Default PoE power modes (**IPM disabled**) - Single PoE source. Enable the IPM feature to manage or avoid restrictions.

Single PoE source	Class 6 (802.3bt)	Class 5 (802.3bt)	Class 4 (802.3at)	Class 3 (802.3af)
Available power budget	51W	40W	25.5W	13.9W
AP power mode	Unrestricted	Restricted	Restricted	Not supported
USB ports	Enabled	Disabled	Disabled	
Ethernet ports	Both ports enabled	Second port disabled	Second port disabled	
MIMO operation	4x4	2x2	2x2	
Reduced max RF transmit power	0 dB	0 dB	-3 dB	

Table 3. Default PoE power modes (IPM disabled) — dual PoE source. Use the IPM feature to manage or avoid restrictions. Use the IPM feature to manage or avoid restrictions.

Dual PoE source	Class 5 + Class 3+	Class 4 + Class 4	Class 4 + Class 3	Class 3 + Class 3
Available power budget	53.9W	51W	39.4W	27.8W
AP power mode	Unrestricted	Unrestricted	Restricted	Restricted
USB ports	Enabled	Enabled	Disabled	Disabled
Ethernet ports	Both ports enabled	Both ports enabled	Both ports enabled	Both ports enabled
MIMO operation	4x4	4x4	4x4	2x2
Reduced max RF transmit power	0dB	0dB	-3dB	-3dB

Mounting Details

A mounting bracket has been pre-installed on the back of the AP. This bracket is used to secure the AP to any of the mount kits (sold separately).

Technical Specifications

Mechanical Specifications

- Dimensions/weight (HPE Aruba Networking AP-755; unit without mount bracket):
 - 260mm (W) x 260mm (D) x 57mm (H)
 - 1,530g
- Dimensions/weight (AP-755; shipping):
 - 350mm (W) x 320mm (D) x 83mm (H)
 - 2,130g

Environmental Specifications

- Operating conditions
 - Temperature: 0C to +50C / +32F to +122F
 - Relative humidity: 5% to 95%
 - ETS 300 019 class 3.2 environments
 - AP is plenum rated for use in air-handling spaces
- Storage conditions
 - Temperature: -25C to +55C / -13F to +131F
 - Relative humidity: 10% to 100%
 - ETS 300 019 class 1.2 environments
- Transportation conditions
 - Temperature: -40C to +70C / -40F to +158F
 - Relative humidity: up to 95%
 - ETS 300 019 class 2.3 environments

Reliability

Mean Time Between Failure (MTBF): 569 khrs (65yrs) at +25C operating temperature (AP-755)

Technical Specifications

General regulatory statements

HPE Aruba Networking WLAN Access Points (APs) comply with all regulatory rules that apply in the country they are configured for.

In most countries these products may not be allowed to enable all available radios and channels, and various restrictions may apply (RF transmit power levels, radar detection, and so on).

Hewlett Packard Enterprise will continue to upgrade the software and regulatory restrictions that apply to these products to help ensure they remain in compliance with the latest regulatory rules in the country of operation.

However, this does not imply a promise or commitment to enable all radios in all countries where we ship these products, and/or enabling all deployment scenarios (indoor/outdoor for example) that they can be configured for.

Consult your HPE representative to confirm the latest regulatory status for each product in the country of operation and any anticipated future enhancements or other changes, as well as check the regulatory rules through the host country's regulatory agencies for more.

Regulatory Compliance

- FCC/ISED
- CE Marked
- Low Voltage Directive 2014/35/EU
- UL/IEC/EN 62368-1
- EN60601-1-2

For more country-specific regulatory information and approvals, please see your HPE Aruba Networking representative.

Regulatory Model Numbers

- HPE Aruba Networking AP-754 (all models): APIN0754
- HPE Aruba Networking AP-755 (all models): APIN0755

Certifications

- UL2043 plenum rating
 - Wi-Fi Alliance (WFA):
 - Wi-Fi CERTIFIED a, b, g, n, ac, 6, 7
 - WPA, WPA2 and WPA3 – Enterprise with CNSA option, Personal (SAE), Enhanced Open (OWE)
 - WMM, WMM-PS, Wi-Fi Agile Multiband
 - Passpoint (release 2)
 - Bluetooth SIG
 - Ethernet Alliance (POE, PD device, class 6)
-

Technical Specifications

Warranty

HPE Aruba Networking's hardware limited lifetime warranty.

Minimum Operating System Software Versions

HPE Aruba Networking Wireless Operating System AOS 10.7.0.0

Technical Specifications

RF Performance Table


Band, rate	Maximum transmit power (dBm) per transmit chain	Receiver sensitivity (dBm) per receive chain
2.4 GHz, 802.11b		
1Mbps	18.0	-93.0
11Mbps	18.0	-88.0
2.4 GHz, 802.11g		
6Mbps	18.0	-93.0
54Mbps	18.0	-75.0
2.4 GHz, 802.11n HT20		
MCS0	18.0	-93.0
MCS7	16.0	-73.0
2.4 GHz, 802.11ax HE20		
MCS0	18.0	-93.0
MCS11	15.0	-64.0
2.4 GHz, 802.11be EHT20		
MCS0	18.0	-93.0
MCS13	13.0	-58.0
5 GHz, 802.11a		
6Mbps	18.0	-93.0
54Mbps	18.0	-75.0
5 GHz, 802.11n HT20/HT40		
MCS0	18.0/18.0	-93.0/-90.0
MCS7	18.0/18.0	-73.0/-70.0
5 GHz, 802.11ac VHT20/VHT40/VHT80/VHT160		
MCS0	18.0/18.0/18.0/18.0	-93.0/-90.0/-87.0/-84.0
MCS9	18.0/18.0/18.0/18.0	-69.0/-66.0/-63.0/-60.0
5 GHz, 802.11ax HE20/HE40/HE80/HE160		
MCS0	18.0/18.0/18.0/18.0	-93.0/-90.0/-87.0/-84.0
MCS11	16.0/16.0/16.0/16.0	-63.0/-60.0/-57.0/-54.0
5 GHz, 802.11be EHT20/EHT40/EHT80/EHT160		
MCS0	18.0/18.0/18.0/18.0	-93.0/-90.0/-87.0/-84.0
MCS13	12.0/12.0/12.0/12.0	-57.0/-54.0/-51.0/-48.0
6 GHz, 802.11ax HE20/HE40/HE80/HE160		
MCS0	18.0/18.0/18.0/18.0	-93.0/-90.0/-87.0/-84.0
MCS11	13.0/14.0/14.0/14.0	-63.0/-60.0/-57.0/-54.0
6 GHz, 802.11be EHT20/EHT40/EHT80/EHT160/EHT320		
MCS0	18.0/18.0/18.0/18.0/18.0	-93.0/-90.0/-87.0/-84.0/-81.0
MCS13	13.0/13.0/14.0/14.0/14.0	-57.0/-54.0/-51.0/-48.0/-45.0

Technical Specifications


Wi-Fi antenna patterns AP-755

Horizontal planes (top view)


Showing both azimuth (0 degrees) and 30 degrees downtilt patterns (averaged patterns for all applicable antennas)

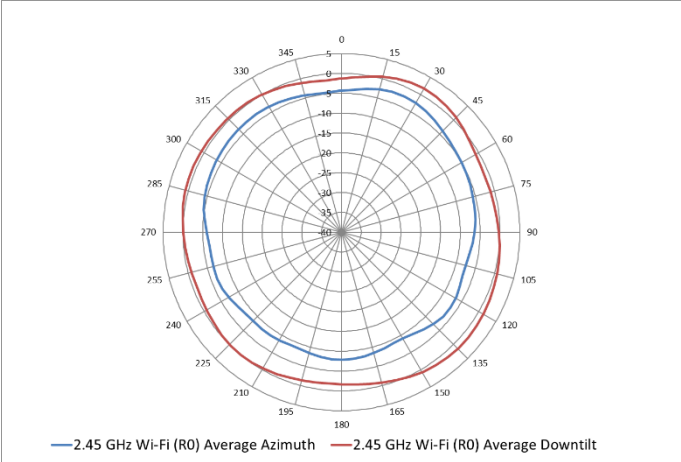

2.45 GHz Wi-Fi antenna patterns (horizontal)

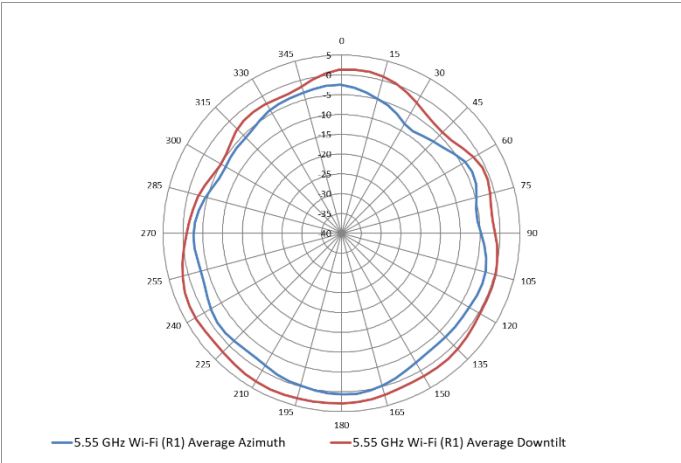

5.55 GHz Wi-Fi antenna patterns (horizontal)

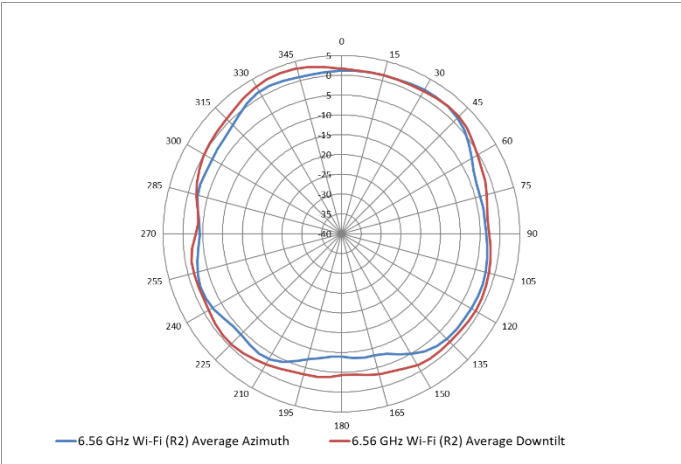


6.56 GHz Wi-Fi antenna patterns (horizontal)


Technical Specifications

Vertical (elevation) planes (side view, AP facing down)


Showing side view with AP rotated 0 and 90 degrees (averaged patterns for all applicable antennas)

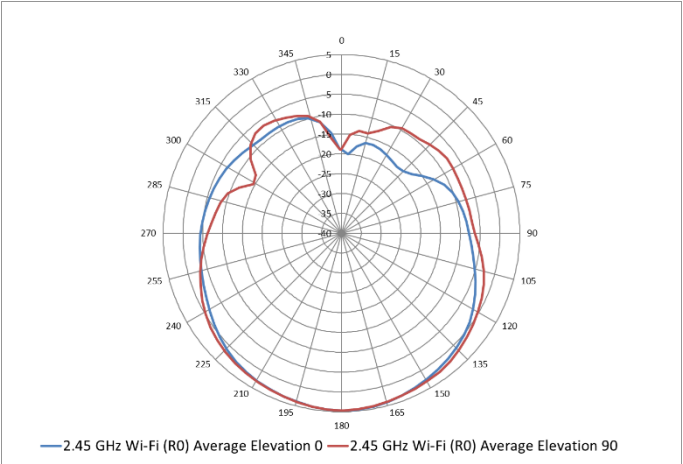

2.45 GHz Wi-Fi antennas patterns (vertical)

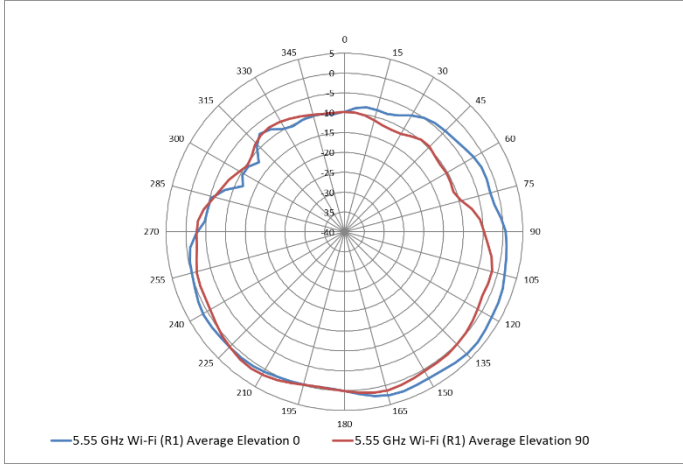

5.55 GHz Wi-Fi antenna patterns (vertical)

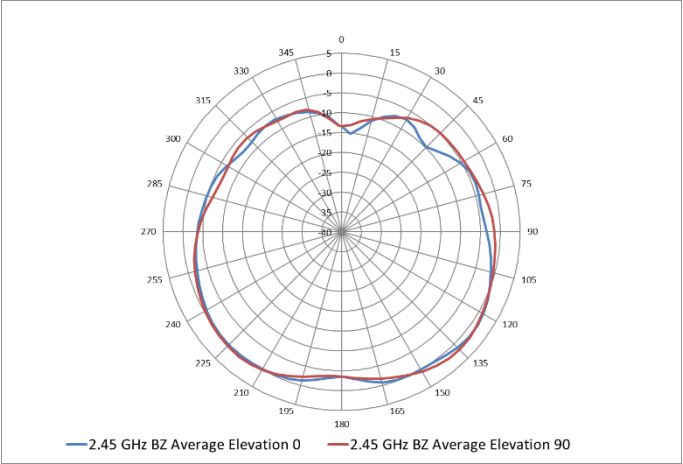

6.56 GHz Wi-Fi antennas patterns (vertical)

Summary of Changes

Date	Version History	Action	Description of Change
15-Jun-2026	Version 10	Changed	Internal QS Updates: Survey Text link and portrait brand format update.
02-Feb-2026	Version 9	Changed	QuickSpecs was updated.
08-Sep-2025	Version 8	Changed	Trusted Platform Module (TPM) information was updated in Standard Features section. Amount of associated client devices updated from 400 to 512 for Wi-Fi Radio Specifications in Technical Specifications section.
28-Jul-2025	Version 7	Changed	Update survey link.
09-Jun-2025	Version 6	Changed	Notes added in Overview - Key Features, Standard Features - Self Locating Access Points, Standard Features - 10 GbE Port with MACsec. Information updated in Technical Specifications - Maximum transmit power (dBm) per transmit chain table.
12-May-2025	Version 5	Changed	Overview, Standard Features and Configuration Information sections were updated.
07-Apr-2025	Version 4	Changed	Overview, Standard Features, Configuration Information, and Technical Specifications sections were updated.
16-Dec-2024	Version 3	Changed	QuickSpecs was updated.
02-Dec-2024	Version 2	Changed	QuickSpecs was updated.
05-Aug-2024	Version 1	New	New QuickSpecs

[Have feedback on QuickSpecs? We're listening](#)

[Chat now](#)

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

To learn more, visit: <http://www.hpe.com/networking>

a50009211enw - 17243 - Worldwide - V10 - 06-July-2026
HEWLETT PACKARD ENTERPRISE
HPE.com

