Antec

NEO PRIZM T3

140 ARGB PWM FAN
Black/White

ARGB

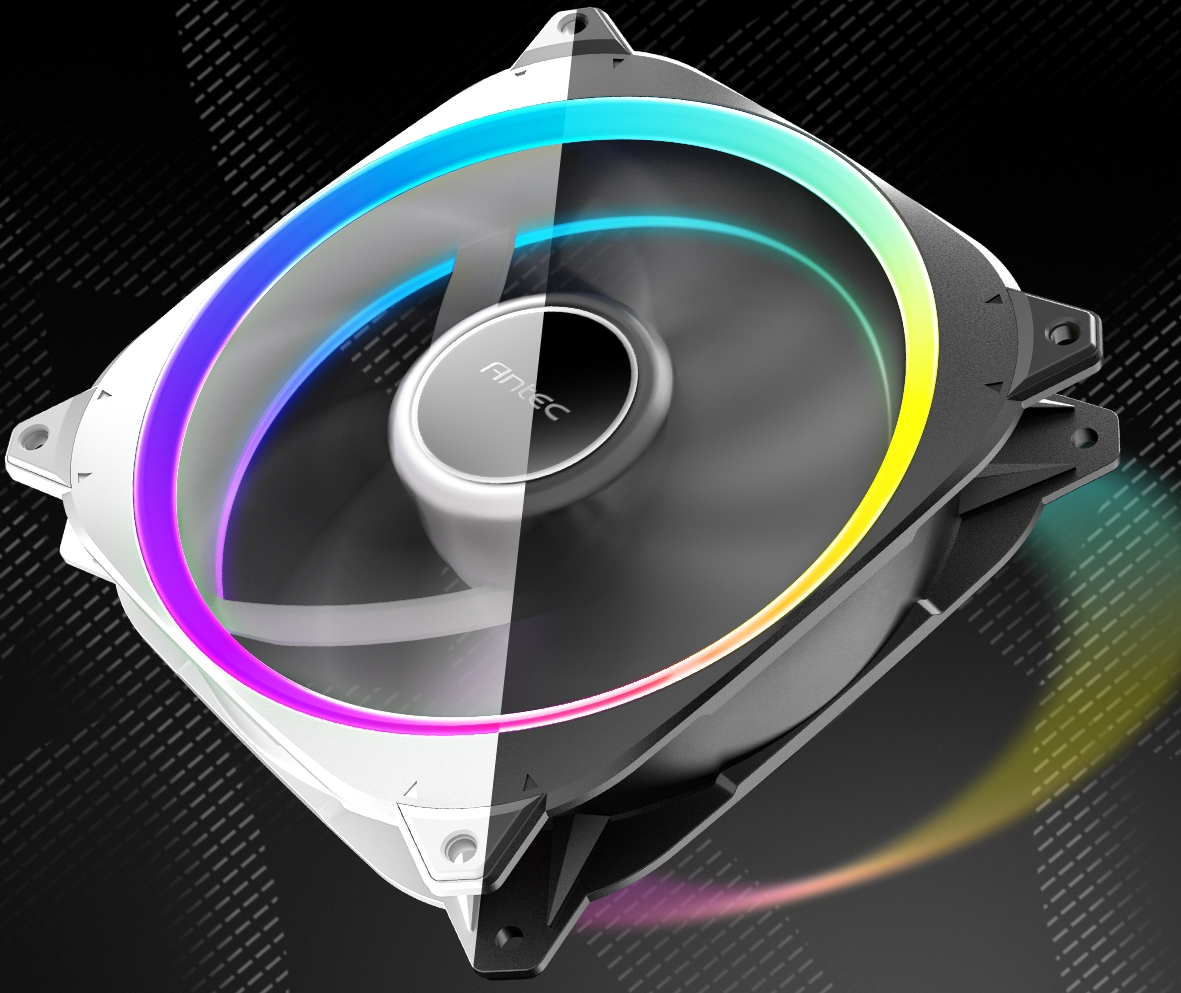

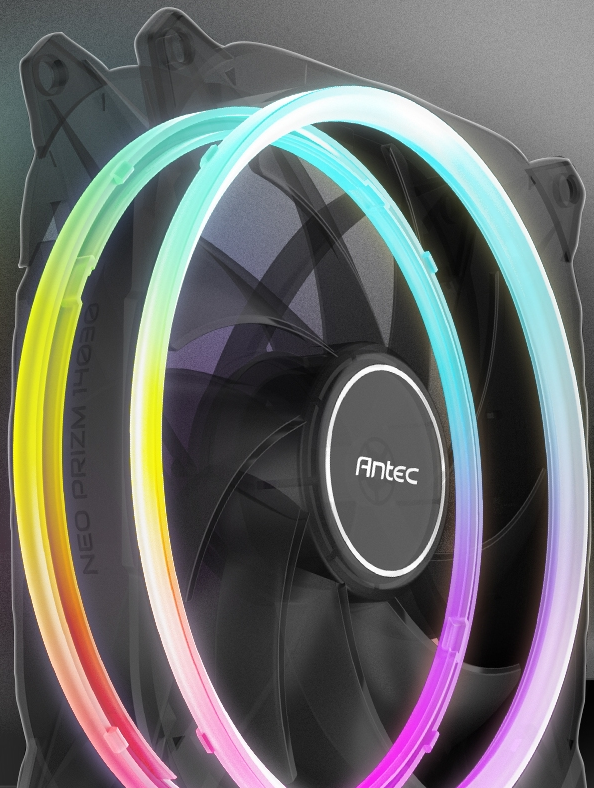
Antec
NEO PRIZM 14038

DUAL LIGHTING RINGS

The dual lighting rings contain multiple individual LEDs, presenting lighting effects on both the front and back sides.

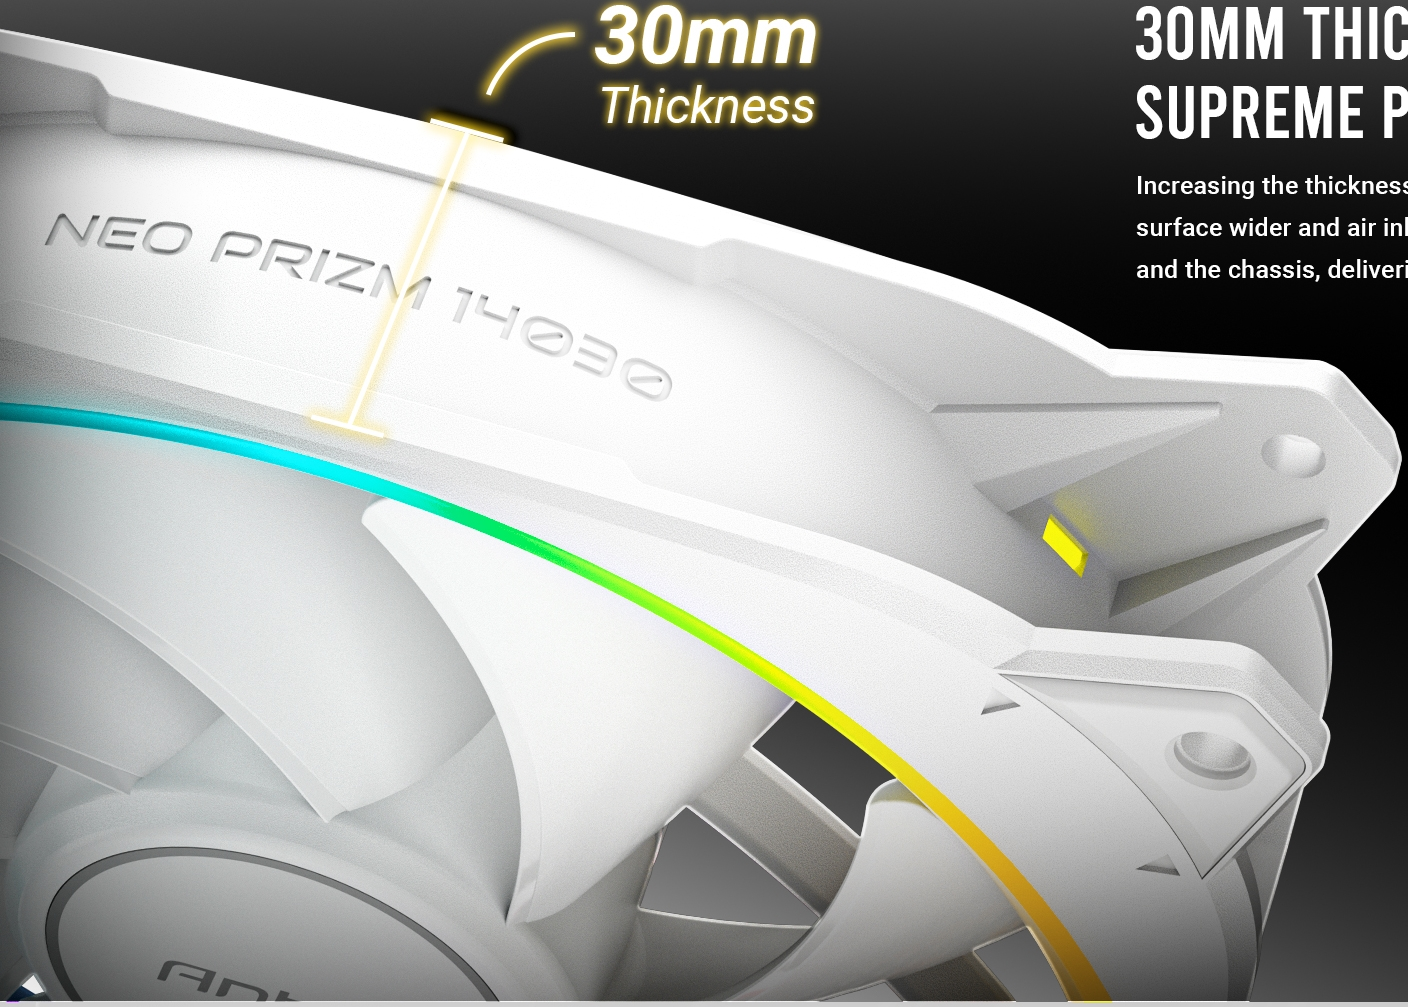
30mm
Thickness
NEO PRIZM 14030

30MM THICKNESS FOR SUPREME PERFORMANCE

Increasing the thickness to 30mm makes the contact surface wider and air inlet area bigger between the fan and the chassis, delivering more airflow.

9 LONG FAN BLADES

Enhance the air pressuse while providing a stable airflow.

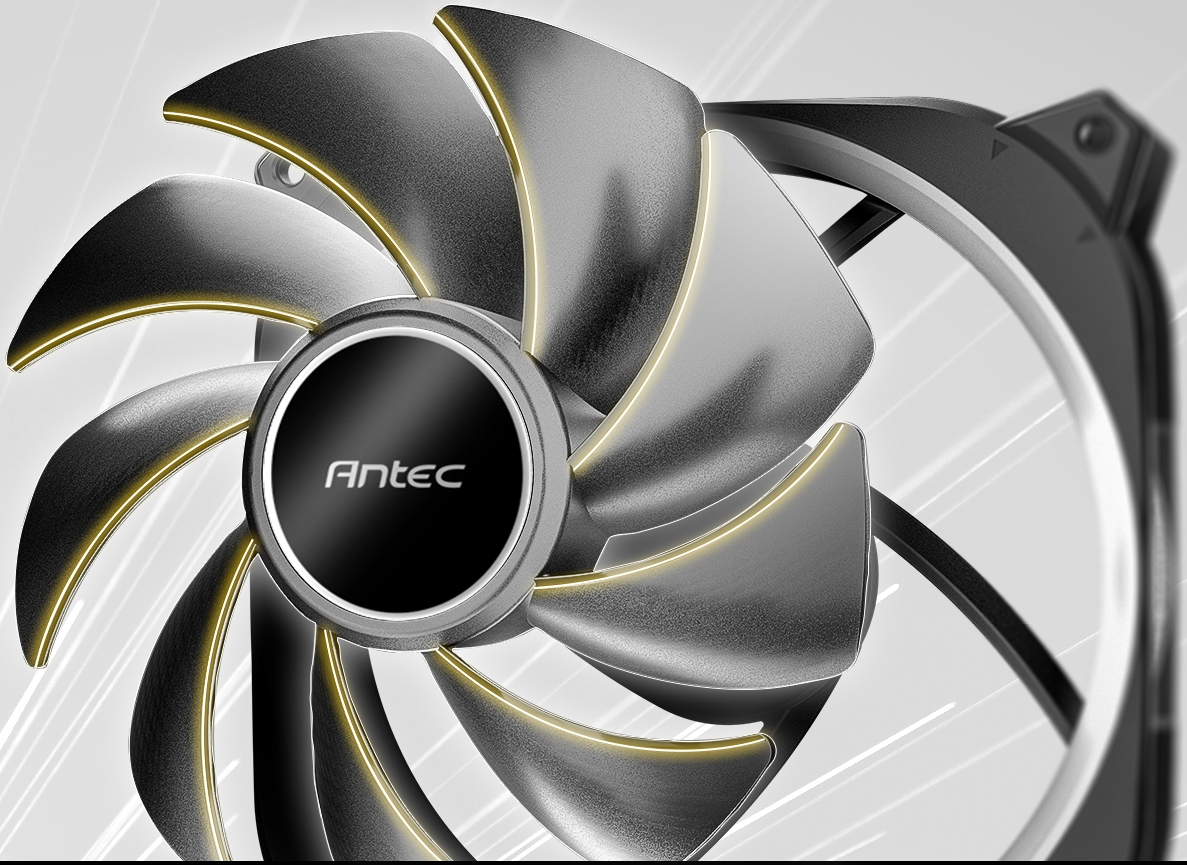

SUBLIME COOLING PERFORMANCE

Airflow

80.52

CFM

Air Pressure

1.59

mmH_2O

Noise Level

30.4

dB(A)

VIBRATION-ABSORBING & ANTI-NOISE PADS

8 anti-vibration rubber pads effectively reduce vibration and noise.

FAN CONNECTOR

3-Pin 5V ARGB Cable

Cable Length: 500 mm

Durable Woven Wire

The cable is covered with durable woven wire to enhance the lifetime & create unique aesthetics.

4-Pin 12V PWM Cable

Cable Length: 500 mm

ARGB & PWM FAN CONTROLLER INSTALLATION

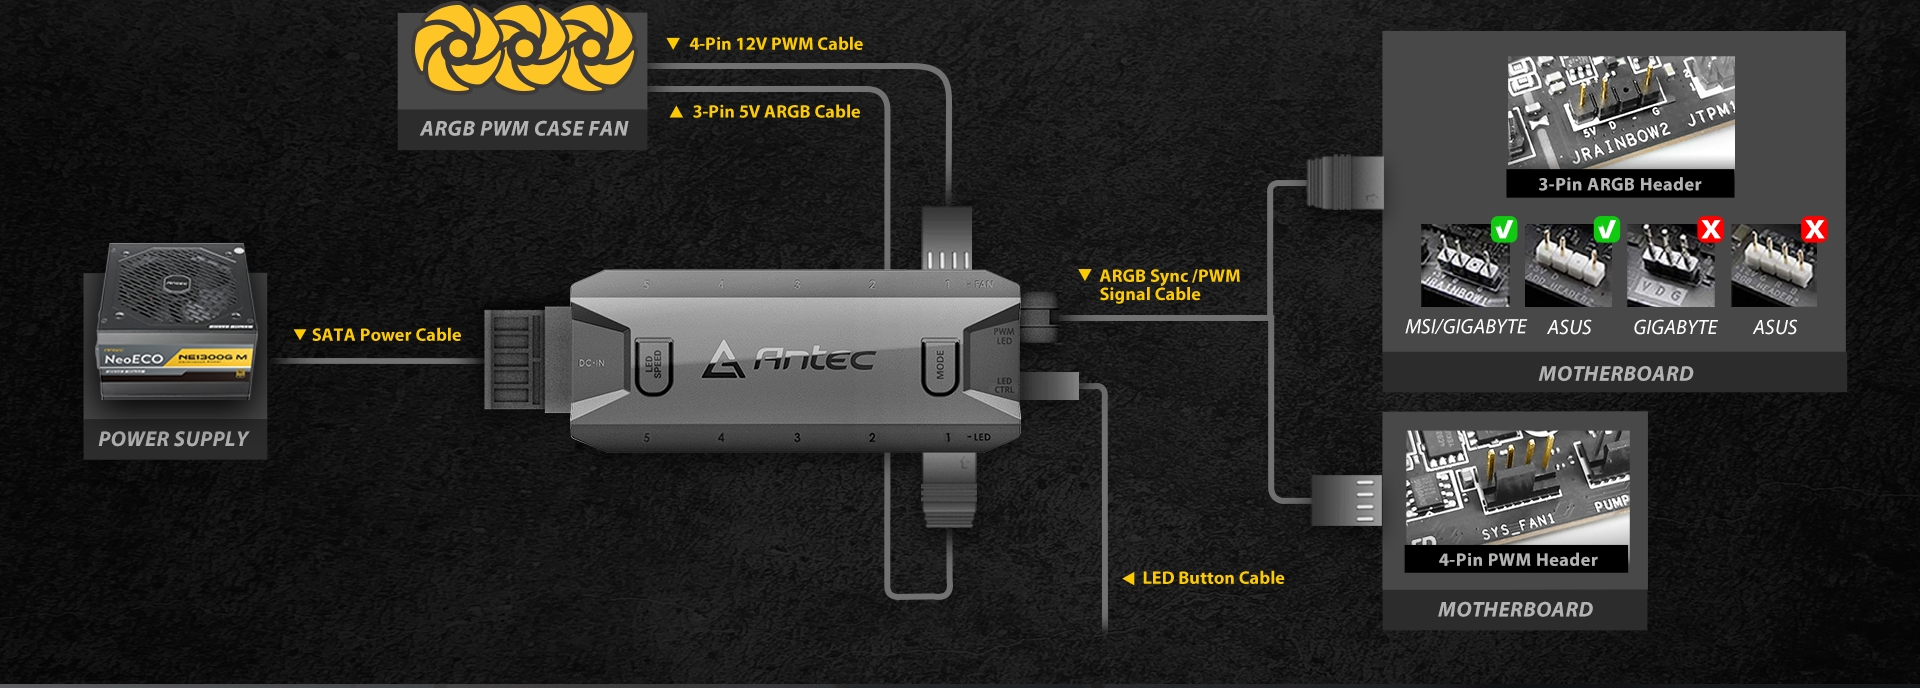
ARGB PWM CASE FAN
▼ 4-Pin 12V PWM Cable
▲ 3-Pin 5V ARGB Cable
POWER SUPPLY
▼ SATA Power Cable
DC-IN
LED SPEED
MODE
PWM LED
LED CTRL
FAN
LED
▼ ARGB Sync/PWM Signal Cable
◀ LED Button Cable
3-Pin ARGB Header
MSI/GIGABYTE
ASUS
GIGABYTE
ASUS
MOTHERBOARD
4-Pin PWM Header
MOTHERBOARD

PACKAGE

Neo Prizm T3 140 ARGB

Neo Prizm T3 140 ARGB
3 in 1 Pack with Controller

Neo Prizm T3 140 ARGB White
3 in 1 Pack with Controller

SPECIFICATION

Fan Type	ARGB PWM Fan
Dimensions	140*140*30 mm
Bearing Type	Hydro Bearing
LED Type	Addressable RGB
Fan Speed	600±200~1500±10% RPM
Airflow	80.52 CFM
Air Pressure	1.59 mmH_2O
Fan Noise Level	30.4 dB(A)
Lifespan	40,000 / hrs 25°C
Connector	Fan : 4-pin(PWM) | LED : 3-pin
Rated Voltage	Fan : DC 12 V | LED : DC 5 V
Operation Voltage	Fan : DC 6.0 ~ 13.8 V | LED : DC 4.5 ~ 5.3 V
Rated Current	Fan : ≤ 0.28 A | LED : ≤ 0.72 A
Warranty	2 years
UPC#	0-761345-77774-2 Neo Prizm T3 140 ARGB 0-761345-77764-3 Neo Prizm T3 140 ARGB_3PK 0-761345-40045-9 Neo Prizm T3 140 ARGB_White_3PK

Antec