


Delock Mini PCIe I/O PCIe full size 1 x Parallel, 2 x Serial RS-232 with voltage supply 5 V / 12 V

Description

The Mini PCIe module by Delock expands your system by two serial and one parallel interface, which you can lead out through the slot bracket. You can connect different serial and parallel devices like printer, scanner, modem etc. to this adapter.

Optional voltage supplies via RS-232

Connected devices can optionally be supplied with voltages of 5 V or 12 V.

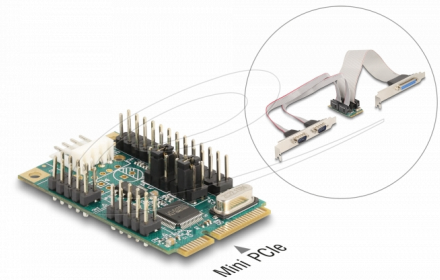

Item no. 95277

EAN: 4043619952779

Country of origin: China

Package: Box

Technical details

- Connectors:
 - external:
 - 2 x serial D-Sub 9 pin male
 - 1 x parallel D-Sub 25 pin female
 - internal:
 - 1 x Mini PCI Express, Rev. 1.2
 - 2 x 10 pin pin header
 - 1 x 26 pin pin header
 - 1 x Floppy 4 pin male
- Chipset: WCH382L
- Form factor: Mini PCIe full size
- Serial specification:
 - Data transfer rate up to 460.8 Kbps
 - FIFO: 2 x 256 byte
 - Databits: 5, 6, 7, 8
 - Stop bits: 1, 2
 - Parity: even, odd, none, mark, space
 - Flow control: none, hardware RTS / CTS, software XON / XOFF
 - Signals: DCD, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI/12V/5V
 - Jumper setting RI or 5 V / 12 V on pin 9
 - Electrical power per port: max. 20 watt (5 V / 4 A)
 - Electrical power per port: max. 48 watt (12 V / 4 A)
- Parallel specification:

- Data transfer rate up to 1 Mbps
- SPP, PS2, EPP, ECP compatible to IEEE 1284
- Cable length incl. connectors: ca. 25 cm
- Dimensions (LxWxH): ca. 51 x 30 x 10 mm




System requirements

- Windows 10/10-64/11
- Windows Server 2022
- Motherboard with a free Mini PCIe slot with a PCIe interface

Package content

- Mini PCIe module
- 2 serial connection cable
- 1 parallel connecting cable
- 2 x standard bracket
- 3 x low profile bracket
- User manual

Images



General

Form factor:	Mini PCIe full size
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 11 Windows Server 2022

Interface

Connector 1:	1 x Mini PCI Express, Rev. 1.2
Connector 2:	1 x D-Sub 25 pin female 2 x 10 pin pin header

Technical characteristics

Data flow control:	RTS / CTS
Chipset:	WCH CH382L
Data transfer rate:	1 Mbps 230.4 Kbps
FIFO:	4 x 265 Byte
Interface output:	RS-232 LPT
UART:	16C550 16C552 16C554 16C750
Data bits:	5, 6, 7, 8
Stop bits:	1, 2

Physical characteristics

Cable length incl. connectors:	25 cm
--------------------------------	-------

Manufacturer information

Street Beeskowdamm 13/15

Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@delock.de
Website	www.delock.de