

Delock USB GaN Charger 2 x USB Type-C™ PD 3.0 with 65 W including power adapter for EU / US / UK

Description


This USB charger by Delock can be used to charge two USB devices. The ports are equipped with a **USB Type-C™ Power Delivery** (PD 3.0), thereby supported devices can be charged with up to **65 watt**.

GaN technology

The use of GaN (gallium nitride) transistors increases efficiency compared to conventional silicon technology. Even with very **compact dimensions** a **high output power** can be achieved.

Ideal travel companion

This charger by Delock is also the ideal companion when travelling. With the three included adapters, the charger can be used **in many countries around the world**. An adapter with a small appliance plug and a suitable connection cable are also included, allowing the power supply unit to be placed **anywhere within reach**.

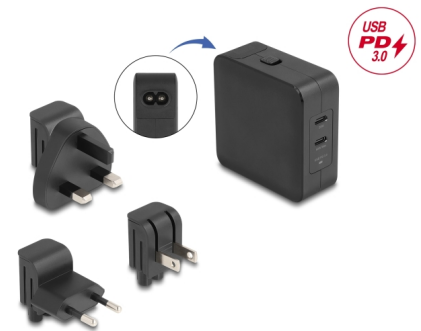

Item no. 41443

EAN: 4043619414437

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
2 x USB Type-C™ female
- Input: AC 100 ~ 240 V / 50 ~ 60 Hz / 1.5 A
- Output:
USB-C™ 1: 5.0 V / 3.0 A, 9.0 V / 2.22 A (max. 20.0 W)
USB-C™ 2: 5.0 V / 9.0 V / 15.0 V / 20.0 V 3.0 A (max. 60.0 W)
- Output power: max. 65.0 W total
- Average active efficiency 83.18 %
- Efficiency at low load (10 %) 76.19 %
- No-load power consumption 0.115 W
- USB Power Delivery (PD) 3.0
- Overload protection
- Over current protection
- Overheating protection
- Short circuit protection

- Colour: black
- Dimensions without plug (LxWxH): ca. 68 x 68 x 30 mm

Package content

- USB charger
- USB Type-C™ to USB Type-C™ cable, length ca. 1 m
- Adapter plug type C: Euro sockets (EU), Switzerland
- Adapter plug type A: Canada, USA, Japan, Philippines, China
- Adapter plug type G: United Kingdom, Ireland, Singapore, Malaysia, Hong Kong
- Adapter to male IEC 60320 C8
- Power cord, length ca. 1.2 m
- User manual

Images



Physical characteristics

Housing colour:	black
Length:	68 mm
Width:	68 mm
Height:	30 mm

Power supply

Power supply input:	AC 100 - 240 V / 50 - 60 Hz / 2.0 A
Power supply output:	5.0 V / 3.0 A 9.0 V / 3.0 A 15.0 V / 3.0 A 20.0 V / 3.0 A
Power supply connector:	1 x USB Type-C™ female

Herstellerinformation

Strasse	Beeskowdamm 13/15
PLZ	14167
Ort	Berlin
Land	Deutschland
E-Mail	info@delock.de
Webseite	www.delock.de