

RGB12X-NDI-WH

12X NDI Camera

NDI®

Key Features

- 72.5 degree wide-angle lens
- High performance in low light scenarios with Wide Dynamic Range
- Full 1920×1080p HD Resolutions up to 60 frames per second
- 2D & 3D low noise CMOS sensor
- PTZ control via serial, IP or NDI
- H.264, H.265 & MJPEG Streaming
- Stream simultaneously to up to three protocols



Front View



Rear View

Specification

Connectors	Video(Output)	HDMI	1×HDMI-A
		SDI	1×BNC
		NDI	1×RJ45
	Audio	Input	1×3.5mm Stereo Jack
	Communication	RS232	2×DIN 8
Performance		RS485	1×2 Pin Terminal Connector
		Network	1×100Mbps(10/100BASE-TX)
	Power		1×HEC3800 DC Socket
	Camera	Optical Zoom	12X f=3.9~46.8mm
		View Angle	6.3°~ 72.5°
		AV	F1.8 ~ F2.4
		Digital Zoom	10X
		Minimum Illumination	0.5Lux (F1.8, AGC ON)
		DNR	2D & 3D DNR
		White Balance	Auto / Manual/ One Push/ 3000K/3500K/4000K/4500K/5000K/5500K/6000K/6500K/7000K
		Focus	Auto/Manual
		Aperture/Electronic Shutter	Auto/Manual
		BLC	ON/OFF
		WDR	OFF/ Dynamic level adjustment
		Video Adjustment	Brightness,Color,Saturation,Contrast,Sharpness,B/W mode,Gamma curve
		SNR	>55dB
		Effective Pixels	2.07m,16:9
	Pan-and-Tilt Parameter	Pan/Tilt Movement	-170°~+170°/-30°~+90°
		Pan/Tilt Control Speed	0.1~60°/S, 0.1~30°/S
		Preset Speed/Quantity	Pan:60°/S,Tilt:30°/S;Up to 255 preset positions(10 remote control)
	Audio Compression Format	AAC,MP3,G.711A	
	Video Compression Format	H.264, H.265,Dual Streaming Output	
	Output Resolutions	720p25/29.97/30/50/59.94/60 1080p25/30/29.97/30/50/59.94/60	
	Control Protocol	VISCA Pelco-D Pelco-P	
	Baud Rate (bps)	115200 9600 4800 2400bps	
	Network Protocol	NDI RTSP RTMP ONVIF GB/T28181	
	Supported Standards	HDMI 1.3 SDI SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI NDI NDI HX low bandwidth version	
Power	Input Voltage	DC12V/1.5A	
	Max Power	12W	
Environment	Temperature	-10℃~50℃	
	Humidity	20%~80%	
Physical	Weight	Net	1.4kg
	Dimension	Net	150mm×150mm×167.5mm

Order Codes

Product Code	Item
981-0011-03-0	RGB12X-NDI-WH 12X NDI Camera


* There is no standard bracket for this PTZ. If necessary, please contact RGBlink sales for additional orders.

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

Dimension

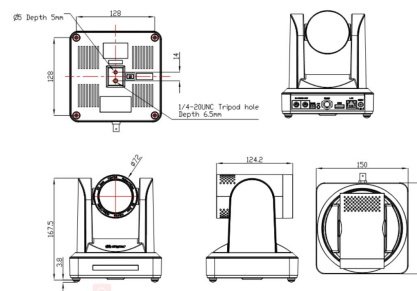

RGBlink®
www.rgbink.com

