

PTZ AI Tracking Camera



Key Features

- Full-scene solution for different scenario demands
- Stable tracking
- Super wide dynamic exposure
- H.264/H.265 Dual Stream Output Adapted to Different Network Environments
- Super quiet holder
- Low-power consumption sleep/wake up mode


Specification

Connectors	Video(Output)	RGB12X-HAI-WH/RGB20X-HAI-WH		RGB12X-SAI-WH/RGB20X-SAI-WH	
		HDMI	2×HDMI-A	SDI	2×BNC
		USB3.0	2×USB	LAN	2×RJ45
		LAN	2×RJ45		
Performance	Audio	Input	1×3.5mm Stereo Jack		
	Communication	RS232	1×DIN 8		
	Power		1×HEC3800 DC Socket		
	Camera		12X Optical Zoom 20X Optical Zoom Optical Zoom 12X f=3.9~46.8mm 20X f=5.5~110mm View Angle 6.3°~ 72.5° 3.3°~ 54.7° AV F1.8 ~ F2.4 F1.6 ~ F3.5 Digital Zoom 10X Minimum Illumination 0.5 lux (F1.8, AGC ON) DNR 2D & 3D DNR White Balance Auto/Manual/One Push/3000K/3500K/4000K/4500K/5000K/5500K/6000K/6500K/7000K Focus Auto/Manual Aperture/Electronic Shutte Auto/Manual BLC ON/OFF WDR OFF/Dynamic Level Adjustment Video Adjustment Brightness/Color/Saturation/Contrast/Sharpness/B/W mode/Gamma curve SNR >55dB Effective Pixels 2.07m,16:9		
Pan-and-Tilt Parameter	Pan/Tilt Movement	-170°~+170°/-30°~+90°			
	Pan/Tilt Control Speed	0.1~100°/S ; 0.1~45°/S			
	Preset Speed/Quantity	Pan:100°/S, Tilt:45°/S; Up to 255 preset positions (10 remote control)			
	Audio Compression Format	AAC,MP3,G.711A			
Video Compression Format	Video Compression Format	H.264+, H.265,Dual Streaming Output			
	Output Resolutions	720p25/29.97/30/50/59.94/60 1080p25/30/29.97/30/50/59.94/60			
	Control Protocol	VISCA Pelco-D Pelco-P			
	Baud Rate(bps)	115200 9600 4800 2400bps			
Network Protocol	Network Protocol	RTSP RTMP ONVIF GB/T28181 VISCA			
	Input Voltage	DC12V			
	Max Power	18W			
	Temperature	-10℃~50℃			
Humidity	Humidity	20%~80%			
	Weight	Net 1.5kg			
Dimension	Dimension	Net 253.9mm×179mm×144.7mm			

Order Codes

Product Code	Model
981-0011-05-0	RGB12X-SAI-WH with 12X zoom and 3G SDI output
981-0011-06-0	RGB20X-SAI-WH with 20X zoom and 3G SDI output
981-0011-07-0	RGB12X-HAI-WH with 12X zoom and HDMI/USB3.0 output
981-0011-08-0	RGB20X-HAI-WH with 20X zoom and HDMI/USB3.0 output
291-0001-12-0	Camera Bracket Mount

Dimension

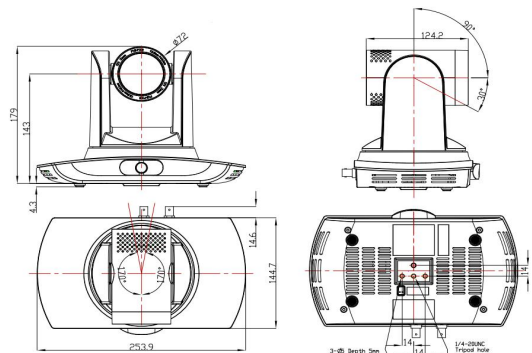

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®
www.rgbink.com

