

PDU11310

ENTRY-LEVEL POWER DISTRIBUTION

Provides reliable power distribution for connected equipment


Ideal for server room and IT applications, the Basic PDU Series is a power distribution device that delivers electricity from a single source to multiple devices. The products can work under high temperature, and feature aluminum alloy housing.

SERIES FEATURES

- Flexibility in Power Distribution
- Work under High Temperature
- Rugged Aluminum Housing
- RoHS Compliant

PRODUCT CALLOUTS

- 1 . AC Power Cord
- 2 . Lighted On/Off Switch
- 3 . AC Outlets
- 4 . Fixed Mounting Brackets

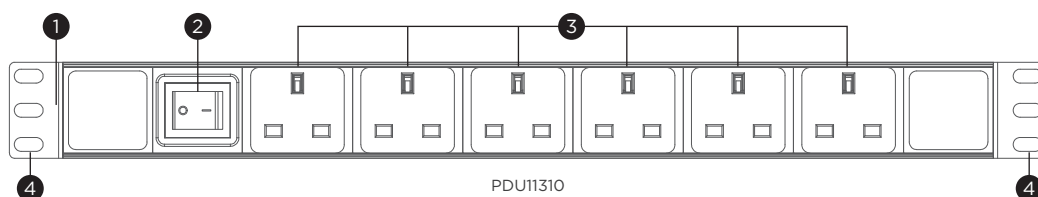



TECHNICAL SPECIFICATIONS

Model Name	PDU11310
Input	
Nominal Input Voltage (Vac)	250
Input Frequency (Hz)	50 / 60
Maximum Input Current (A)	13
Input Connector Type	UK x 1
Power Cord Length (m.)	1.8
Output	
Outlet(s) - Total	6
Outlet Type	UK x 6
Physical	
Installed Rack Height (U)	1
Physical Size	
Maximum Dimensions (WxHxD) (mm.)	486 x 45 x 45 (Include mounting brackets)
Weight (kg.)	0.84
Environmental	
Operating Temperature (°C)	-5 - 60
Operating Relative Humidity (Non-condensing) (%)	5 - 95
Certifications	
Certifications*	CE, UKCA
RoHS	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.