

# ViewSonic® LCD DISPLAY

## VA2708-2K-HD-2


### Key Features

- SuperClear® IPS panel
- QHD 2560 X 1440 resolution
- 75Hz refresh rate delivers fluid visuals
- Variable Refresh Rate eliminates screen tearing and reduces stuttering
- HDMI and Display Port inputs for simple connectivity



### Product Description

The ViewSonic VA2708-2K-HD-2 is a 27" QHD IPS monitor featuring HDMI and DisplayPort inputs for business and home use. The optimal screen performance and comfortable viewing without tearing or stuttering is delivered through variable refresh rate, Eye ProTech technology, and various ViewMode presets. Simply expand your workspace and experience truly seamless multitasking on just one screen with a VESA-compatible mount at a low power consumption.

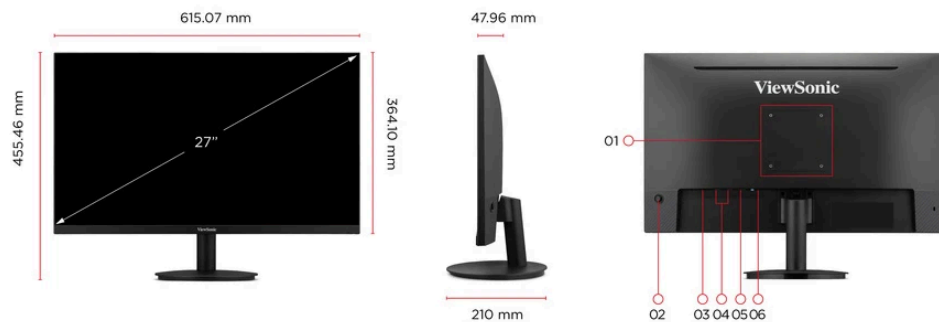

1. VESA Compatible (Wall Mount 100 × 100 mm)
2. Joy Key
3. Power In
4. HDMI ×2
5. DisplayPort
6. Audio Out

Visit Us

[www.viewsonic.com](http://www.viewsonic.com)



**DISPLAY**

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS Technology
Resolution:	2560 x 1440
Resolution Type:	QHD (Quad HD)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
High Dynamic Range:	HDR10
Light Source:	LED
Brightness:	300 cd/m <sup>2</sup> (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	75
Variable Refresh Rate Technology:	Yes
Low Blue Light:	Software solution
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Size:	0.233 mm (H) x 0.233 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

**COMPATIBILITY**

PC Resolution (max):	2560x1440
Mac® Resolution (max):	2560x1440
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	2560x1440

**CONNECTOR**

3.5mm Audio Out:	1
HDMI 2.0 (with HDCP 2.2):	2
DisplayPort:	1
Power in:	DC Socket (Center Positive)

**POWER**

Eco Mode (Conserve):	18W
Eco Mode (optimized):	22W
Consumption (typical):	29W
Consumption (max):	32W
Voltage:	AC 100-240V
Stand-by:	0.3W
Power Supply:	External Power Adaptor

**ADDITIONAL HARDWARE**

Kensington Lock Slot:	1
-----------------------	---

**CONTROLS**

Physical Controls:	Up, Right, Down, Left, Power
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

**OPERATING CONDITIONS**

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

**WALL MOUNT**

VESA Compatible:	100 x 100 mm
------------------	--------------

**INPUT SIGNAL**

Frequency Horizontal:	31 ~ 112KHz
Frequency Vertical:	48 ~ 75Hz

**VIDEO INPUT**

Digital Sync:	TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.4)
---------------	--

**ERGONOMICS**

Tilt (Forward/Back):	-5° / 20°
----------------------	-----------

**WEIGHT (IMPERIAL)**

Net (lbs):	7.7
Net Without Stand (lbs):	6.8
Gross (lbs):	10.4

**WEIGHT (METRIC)**

Net (kg):	3.5
Net Without Stand (kg):	3.1
Gross (kg):	4.7

**DIMENSIONS (IMPERIAL) (WXHxD)**

Packaging (in.):	26.8 x 18.1 x 4.7
Physical (in.):	24.22 x 17.93 x 8.27
Physical Without Stand (in.):	24.22 x 14.33 x 1.89

**DIMENSIONS (METRIC) (WXHxD)**

Packaging (mm):	680 x 460 x 120
Physical (mm):	615.07 x 455.46 x 210
Physical Without Stand (mm):	615.07 x 364.1 x 47.96

**GENERAL**

Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO
PACKAGE CONTENTS:	VA2708-2K-HD-2 x1, HDMI Cable (v1.4; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Power plug x1 or 2 (by country)
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market