

DUAL USB-C POWER ADAPTER-65W

Keeps you powered at home,
work, or on the go!


The C2G 65W Dual USB-C Power Adapter offers fast, efficient charging for laptops and devices from leading brands like Apple® and Microsoft® Surface®. With two USB-C ports delivering up to 65W, it keeps you powered at home, work, or on the go.

Designed for durability and convenience, it features foldable AC prongs to prevent damage. Built-in safety protections guard against overcurrent, overvoltage, overload, short circuits, and overheating.

With a sleek, functional design, this adapter is perfect for professionals and students. Stay powered and protected with the C2G 65W Dual USB-C Power Adapter.



C2G58880



Front



Side

FEATURES

- Two USB-C port to charge two devices simultaneously with total output of up to 65W for efficient power delivery
- Compatible with top laptop brands, including Apple®, Microsoft® Surface®, and other leading laptops and tablets
- Provides 5V-3A, 9V-3A, 15V-3A, and 20V-2.25A to accommodate various device charging needs
- **Foldable AC Prongs** – Reduces the risk of damage when not in use, making it ideal for travel
- **Advanced Safety Protections** – Includes overcurrent, overvoltage, overload, short circuit, and over-temperature protection for safe and reliable charging
- Backed by a 5-year warranty

ITEM	DESCRIPTION
C2G58880	Dual USB-C Power Adapter-65w


DUAL USB-C POWER ADAPTER-65W

Specifications

		C2G58880		
ELECTRICAL SPECIFICATIONS	Input	100-240VAC, 50-60Hz 1.5A Max		
	Standby Input Power	0.3W (Input 115VAC/230VAC, No Load)		
	Output Single Port	USB-C1: 65W Max	5V-3A	
			9V-3A	
			12V-3A	
			15V-3A	
			20V-3.25A	
		USB-C2: 65W Max	5V-3A	
			9V-3A	
			12V-3A	
			15V-3A	
			20V-3.25A	
	Output Dual Port	USB-C1: 45W Max	5V-3A	
			9V-3A	
12V-3A				
15V-3A				
20V-2.25A				
USB-C2: 20W Max		5V-3A		
		9V-3A		
PHYSICAL CHARACTERISTICS	Dimensions (HxWxD)	1.594 in x 1.496 x ?? in (40.5 x 38.0 x ?? mm)		
	Port	USB-C, Female		
	Housing Material	Plastic		
	Housing Color	White		
	Weight	0.31 lb		
	Regulatory Approvals	CE marked; Conforms to 2011/65/EU ROHS 2		
ENVIRONMENTAL	Operating Temperature	0°C to 25°C (32°F to 104°F)		
	Storage Temperature	-20°C to 85°C (-4°F to 140°F)		
	Operation Humidity	20% to 90% RH (non-condensing)		
	Storage Humidity	5% to 95% RH (non-condensing)		

DUAL USB-C POWER ADAPTER-65W

TECHNICAL DRAWINGS

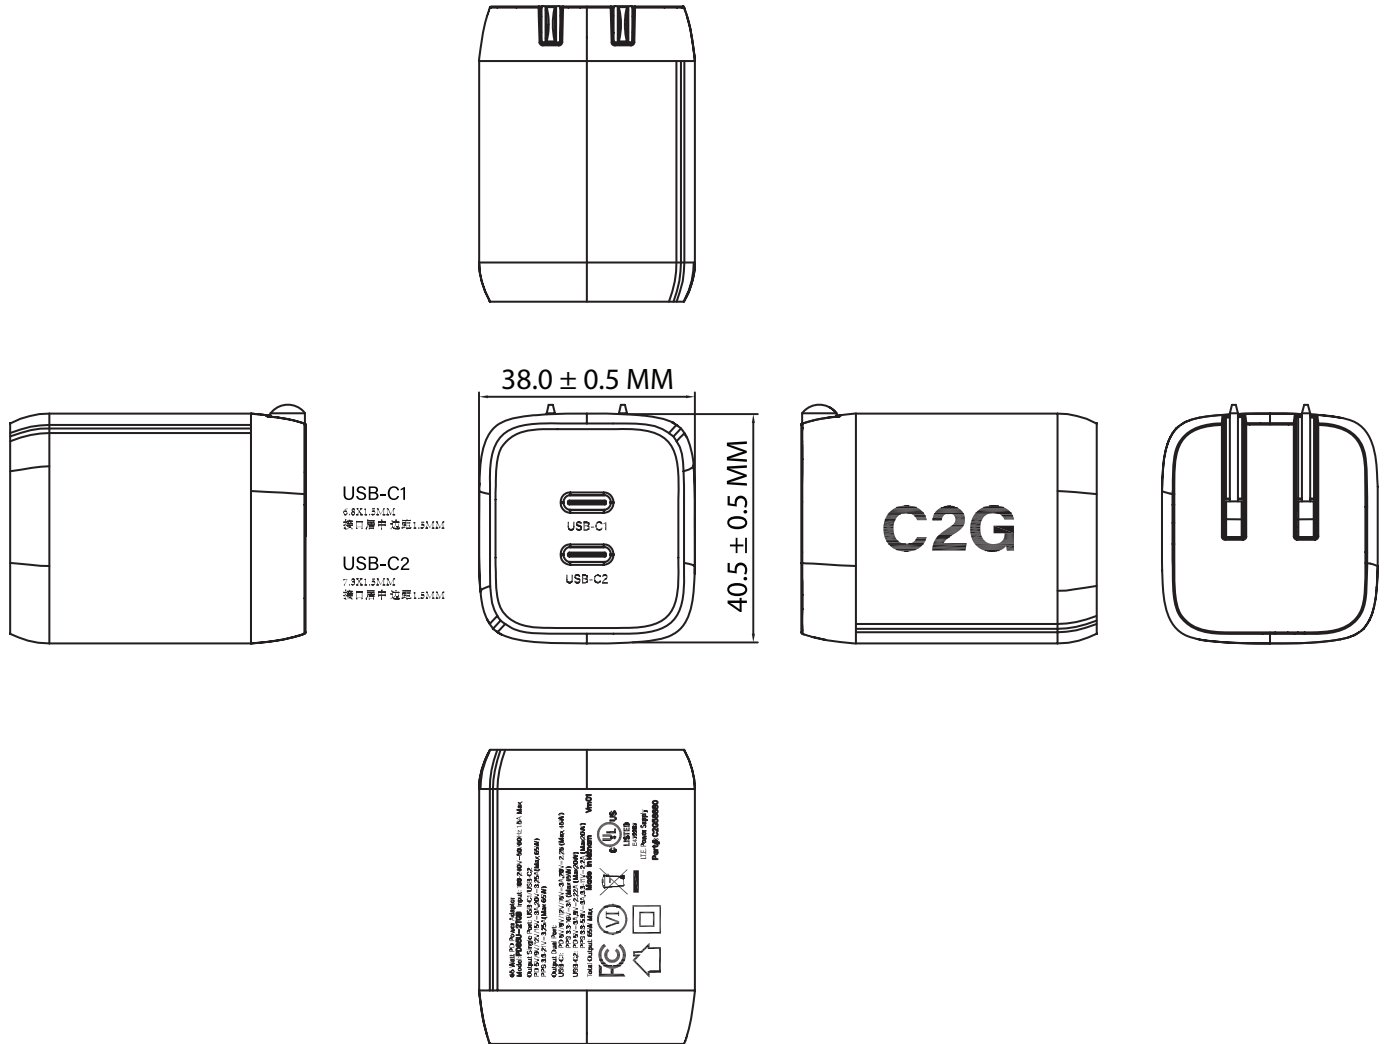

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY

USA 866.977.3901 av.c2g.techsupport@legrand.com

APAC +852 2145 4099 av.asia.sales@legrand.com

EMEA +31 495 580 840 c2g.emea@av.legrand.com