
Quick Operation Guide

VLTOOL1

Vivolink Mini HDMI Signal Generator



The VLTOOL1 is a portable mini HDMI signal generator and display emulator (signal analyzer), two functions combine into a compact size chassis. This is very useful for AV installers or testers; When work as signal generator, it can generate 4 signals, max resolution up to 4K@60Hz, 4:4:4, also can analyze the HDCP content, there is a 4 pin DIP switcher to control this; When work as a display emulator, it also can analyze the HDCP content and signal status (5V, TMDS). The LEDs will show the signal or HDCP status.

Features


- Used as HDMI signal generator or display emulator (signal analyzer).
- Provides 4-pin DIP switch for setting video resolution and HDCP content.
- Supports 4K@60Hz 4:4:4, 4K@60Hz 4:2:0, 4K@30Hz 4:4:4, or 1080p@60Hz video signal output.
- Supports HDCP OFF, HDCP 1.4 or HDCP 2.2 output.
- Supports four different test patterns for HDCP version.
- LEDs show signal and HDCP status.

Packing List

- 1x VLTOOL1 Mini HDMI Signal Generator
- 1x USB Power Cord
- 1x Brown Cloth Bag

-
- 1x User Manual
 - 1x HDMI female to female adapter


Product Description

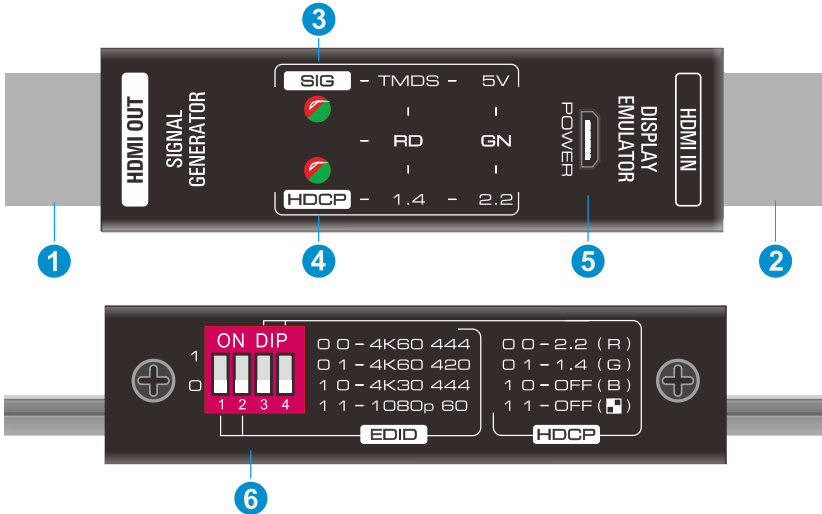

- 1. HDMI OUT:** Connects to HDMI display device. The VLTOOL1 is used as a HDMI signal generator to output HDMI signal.
- 2. HDMI IN:** Connects to HDMI source device. The VLTOOL1 is used as a display emulator to detect the HDCP content and signal status (5V, TMDS) of HDMI source.
- 3. SIG LED:**
 - When the VLTOOL1 is used as a HDMI signal generator, the LED turns red when there is HDMI signal output.
 - When the VLTOOL1 is used as a display emulator, the LED turns green when only 5V signal is detected, or turns red when 5V and TMDS signals are detected simultaneously, or off when no HDMI signal input.
- 4. HDCP LED:**
 - When the VLTOOL1 is used as a HDMI signal generator, the HDCP content can be selected by 4-pin DIP switch. The LED turns green when HDCP 2.2 is selected, or red when HDCP 1.4 is selected, off when no HDCP.
 - When the VLTOOL1 is used as a display emulator, The LED turns green when the HDCP content of HDMI source is HDCP 2.2, or red when it is HDCP 1.4, or off when no HDCP.
- 5. POWER:** Micro USB port for power cord connection. The VLTOOL1

must be powered on when it is used as a signal generator. When the VLTOOL1 is used as a display emulator, it can be powered by HDMI source, so the power cord connection is no required, if the HDMI source has no enough power, both of the SIG LED and HDCP LED will blink.


6. DIP SWITCH: When the VLTOOL1 is used as a HDMI signal generator, switch 1 & 2 are used for built-in EDID (video) selection, and switch 3 & 4 are used for HDCP content selection.



There are four switches (1~4). The switch represents “0” when in the lower position, and it represents “1” while putting the switch in the upper position.

Switch Status (1 & 2)	EDID	
00	4K@60Hz 4:4:4	
01	4K@60Hz 4:2:0	
10	4K@30Hz 4:4:4	
11	1080p@60Hz/3D	
Switch Status (3 & 4)	HDCP	Test Pattern
00	HDCP 2.2	Red Screen
01	HDCP 1.4	Green Screen
10	HDCP OFF	Blue Screen
11	HDCP OFF	AlternateWB

System Diagram

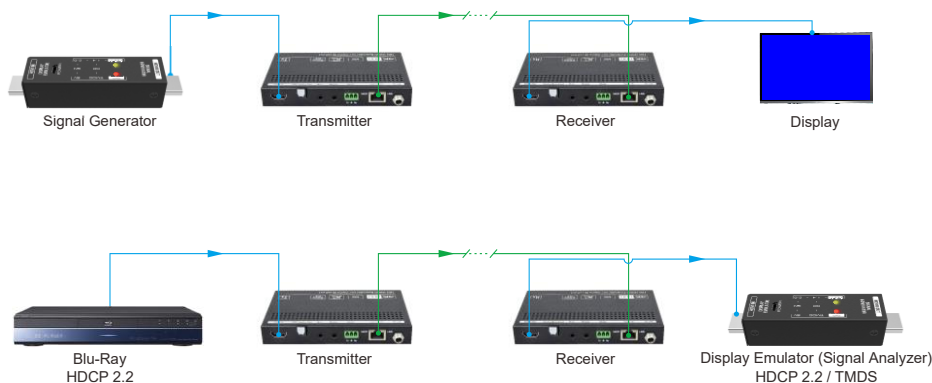

Specifications

Connectors	
Input	(1) HDMI IN
Input Connector	(1) 19-pin type-A male HDMI
Output	(1) HDMI OUT
Output Connector	(1) 19-pin type-A male HDMI
Power Connector	(1) Micro-USB
Control	(1) 4-pin DIP switch
General	
Input Video Resolution	Up to 4K@60Hz 4:4:4 8bit
Output Video Resolution	Supports 4K@60Hz 4:4:4, 4K@60Hz 4:2:0, 4K@30Hz 4:4:4, and 1080p@60Hz to be selected.
HDMI Version	2.0
HDCP Content	2.2, 1.4
Power Supply	5VDC 1A (USB power cord)
Power Consumption	2W (Max)
Operation Temperature	-5 to +55°C (+23° to +131°F)
Storage Temperature	-25 to +70°C (-13° to +158°F)

Relative Humidity	10% to 90%, Non-condensing
Dimensions (W*H*D)	75mm x 22mm x 19mm
Net Weight	65g