



LU895UST

BenQ DLP Projector

- 5000 ANSI Lumen Laser Light Source
- 93% Rec.709 Brilliant Colour
- Low Offset
- 2D Keystone & Corner Fit
- Factory White Balance Adjustment (WBA)
- IP6X & Optional Filter with Switch
- Firmware Management over Network


Display	
Projection System	DLP Single 0.67"
DMD Type	WUXGA
Native Resolution	1920 x 1200
Brightness	5000 ANSI Lumens
Contrast Ratio*	3,000,000 : 1
Display Colour	30 Bits (1.07 Billion Colours)
Aspect Ratio	Native 16:10 (5 Aspect Ratio)
Light Source	Laser
Light Source Life** (Normal / Eco)	20,000 / 30,000 hours
Optical	
Throw Ratio	0.253
Zoom Ratio	Fixed
Keystone Correction	2D, Vertical ±15 degrees / Horizontal ±14 degrees
Projection Offset	117%
Projection Size	133" ~ 200"
Audio	
Built-In Speaker	10W x1
Special Feature	
Security	Security Bar, Kensington Anti-Theft Lock
Features	24/7 Operation, 2D Keystone, Corner Fit, LAN Control, Firmware upgrade via USB, Firmware Management over Network, WBA, Optional Filter& Switch
Compatibility	
Resolution Support	VGA (640 x 480) to 4K UHD (3840 x 2160)
Horizontal Frequency	15K ~ 135KHz
Vertical Scan Rate	23 ~ 120Hz
HDTV Compatibility	720p, 1080i, 1080p, 2160p
Video Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 1200p, 2160p
Power	
Power Consumption (Max / Normal / Eco)	300W / 255W / 170W
Standby Power Consumption	Normal < 0.5W
Power Supply	100 ~ 240V AC
Dimension and Weight	
Product Dimensions (W x H x D)	327 x 131.6 x 328.3mm
Product Weight	4.5kg ±100g
Operation Condition	
Noise Level (Normal / Eco)	34 / 30dBA
Operating Temperature	0 ~ 40°C
Accessories	
Accessories (Standard)	Remote Control, AAA Battery *2, Power Cord (by Region), Power Adapter, Quick Start Guide, Warranty Card (by Region), Regulatory Statement
Accessories (Optional)	Filter (Side: 5J.JTH54.101 / Back: 5J.JTH54.102), Filter Case (Side: 5J.JTH54.001 / Back: 5J.JTH54.002)
OSD	
On Screen Display Language	Arabic/ Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian /Persian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/ Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese/ Vietnam (30 languages)
Other	
Part Number / EAN Code	9H.JTH77.76E / 471 8755 08347 1

*The Contrast is measured by Full On/Full Off standard.

**Light Source Life results will vary depending on environmental conditions and usage.
Actual product's features and specifications are subject to change without notice.

BenQ


INPUT AND OUTPUT TERMINALS

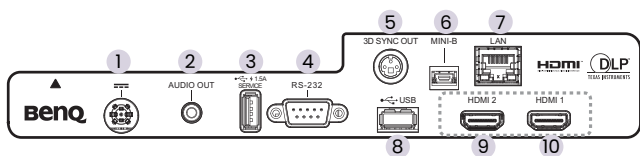


- | | |
|--|------------------|
| 1 - IR Receiver (Front + Top) | 6 - MINI-B |
| 2 - Audio out (Mini Jack) | 7 - LAN (RJ45) |
| 3 - USB 1 Type A (1.5A Power / FW Upgrade) | 8 - USB 2 Type A |
| 4 - RS232 In (D-sub 9pin, male) | 9 - HDMI 2 |
| 5 - 3D Sync Out | 10 - HDMI 1 |

DIMENSIONS

327.0 (W) x 328.3 (D) x 131.6 mm (H)

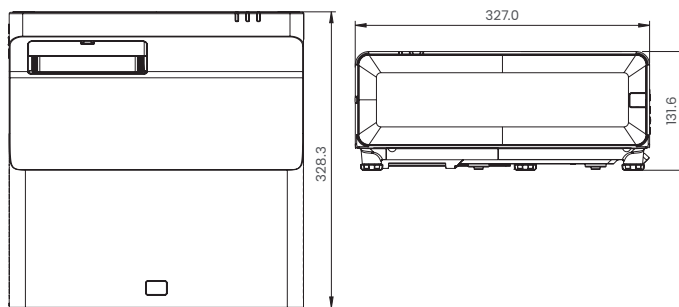

PROJECTION DIMENSIONS

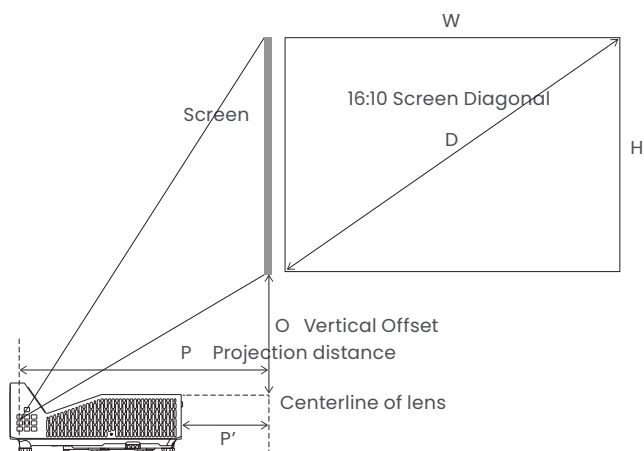


DISTANCE CHART

Screen size				(P) Optical projection Distance (mm)	(P') Projection dis- tance from back to screen (mm)	(O) Vertical Offset (mm)
Diagonal	Inch	mm	(H) Height (mm)			
			(W) Width (mm)			
133	3378	1790	2865	725	438	253
135	3429	1817	2908	736	449	257
140	3556	1885	3015	763	476	269
145	3683	1952	3123	790	503	280
150	3810	2019	3231	817	530	291
154	3912	2073	3317	839	552	300
170	4318	2289	3662	926	639	336
180	4572	2423	3877	981	694	359
190	4826	2558	4092	1035	748	381
200	5080	2692	4308	1090	803	404

CEILING / WALL MOUNT CHART

BenQ ceiling mount CMG3
(5J.JAM10.001)
Ceiling mount screw:
M4 x 8L

Unit: mm

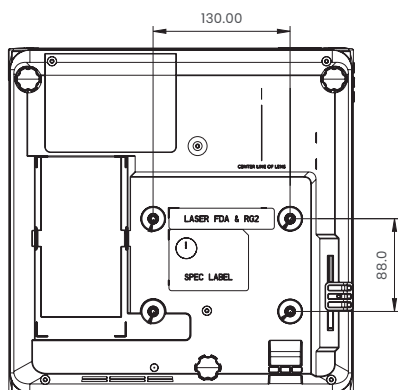

www.benq.eu/en-eu/business/projector.html

© 2025 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties.

BENQ