

HANDS-FREE SCANNER

SP20 Series

Product Reference Guide

MN-005477-03EN Rev. A



Zebra Technologies | 3 Overlook Point | Lincolnshire, IL 60069 USA
zebra.com

2026/07/22

The Zebra wordmark and logo are trademarks of Zebra Technologies Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. ©2026 Zebra Technologies Corp. and/or its affiliates.

Information in this document is subject to change without notice. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of those agreements.

For further information regarding legal and proprietary statements, please go to:

SOFTWARE: zebra.com/informationpolicy.

COPYRIGHTS: zebra.com/copyright.

PATENTS: ip.zebra.com.

WARRANTY: zebra.com/warranty.

END USER LICENSE AGREEMENT: zebra.com/eula.

Terms of Use

Proprietary Statement

This manual contains proprietary information of Zebra Technologies Corporation and its subsidiaries ("Zebra Technologies"). It is intended solely for the information and use of parties operating and maintaining the equipment described herein. Such proprietary information may not be used, reproduced, or disclosed to any other parties for any other purpose without the express, written permission of Zebra Technologies.

Product Improvements

Continuous improvement of products is a policy of Zebra Technologies. All specifications and designs are subject to change without notice.

Liability Disclaimer

Zebra Technologies takes steps to ensure that its published Engineering specifications and manuals are correct; however, errors do occur. Zebra Technologies reserves the right to correct any such errors and disclaims liability resulting therefrom.

Limitation of Liability

In no event shall Zebra Technologies or anyone else involved in the creation, production, or delivery of the accompanying product (including hardware and software) be liable for any damages whatsoever (including, without limitation, consequential damages including loss of business profits, business interruption, or loss of business information) arising out of the use of, the results of use of, or inability to use such product, even if Zebra Technologies has been advised of the possibility of such damages. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Contents

About This Guide.....	15
Configurations.....	15
Accessories.....	15
Notational Conventions.....	16
Icon Conventions.....	16
Service Information.....	17
 Getting Started.....	 18
Unpacking the Scanner.....	18
Features.....	19
Installing the SP20 Stand.....	20
Mounting the SP20 to a Stand.....	21
Mounting Options.....	23
Mounting Dimensions.....	24
Mounting the SP20.....	26
Host Interfaces.....	28
 123Scan and Software Tools.....	 29
123Scan.....	29
Communication with 123Scan.....	30
123Scan Requirements.....	30
123Scan Information.....	30
Scanner SDK, Other Software Tools, and Videos.....	31
Advanced Data Formatting.....	31
Preferred Symbol.....	32

Data Capture.....	33
Scanning.....	33
Active Scan Area.....	33
Beeper and LED Indicators.....	34
Maintenance and Troubleshooting.....	37
Maintenance.....	37
Known Harmful Ingredients.....	37
Approved Cleaners.....	37
Cleaning the Scanner.....	38
Troubleshooting.....	38
Dump Scanner Parameters.....	40
Specifications.....	42
Electrical Interface.....	42
SM20 Decode Distances.....	43
USB Interface.....	44
USB Parameter Defaults.....	44
USB Device Type.....	45
USB Barcodes with Unknown Characters.....	47
Product ID (PID) Type.....	47
Product ID (PID) Value.....	48
ECLevel.....	48
TGCS (IBM) USB Beep Directive.....	48
TGCS (IBM) USB Barcode Configuration Directive.....	49
IBM Scanner Generic Management Information.....	49
IBM Scanner Vendor Specific Management Information.....	50
TGCS (IBM) USB Direct I/O Beep.....	50
USB Convert Unknown to Code 39.....	51
TGCS (IBM) USB Specification Version.....	51
USB IBM Long Direct I/O.....	52
IBM Flash Update.....	52

USB Keystroke Delay.....	52
USB Caps Lock Override.....	53
Keypad Emulation.....	53
Keypad Emulation with Leading Zero.....	54
USB Function Key Mapping.....	54
USB Simulated Caps Lock.....	55
USB Convert Case.....	55
USB Keyboard FN1 Substitution.....	56
USB Polling Interval.....	56
USB Quick Keypad Emulation.....	58
USB Fast HID.....	59
Symbol Native API (SNAPI) Status Handshaking.....	59
CDC Beep on BEL.....	60
USB CDC Host Variant.....	60
USB Static CDC.....	61
RS-232 Interface.....	62
RS-232 Host-Specific Code ID Characters.....	62
RS-232 Parameter Defaults.....	64
RS-232 Host Types.....	64
RS-232 Baud Rate.....	66
RS-232 Parity.....	67
Check Receive Errors.....	68
RS-232 Stop Bits.....	68
Data Bits.....	68
Hardware Handshaking.....	69
Software Handshaking.....	71
RS-232 Barcodes with Unknown Characters.....	72
RS-232 Host Serial Response Timeout.....	72
RTS Line State.....	73
Beep on <BEL>.....	73
Intercharacter Delay.....	74
Datalogic Host Format.....	74
Datalogic Supported Commands.....	75

Nixdorf Beep/LED Options.....	75
NCR Use Prefix.....	76
NCR Use Block Check Character (BCC).....	76
NCR Prefix.....	76
NCR Suffix.....	77
NCR 2D Label-ID Mode.....	77
SSI Interface.....	79
Communication.....	79
SSI Commands.....	79
SSI Transactions.....	80
General Data Transactions.....	80
Decoded Data Transmission.....	81
Communication Summary.....	82
RTS/CTS Lines.....	82
ACK/NAK Option.....	83
Number of Data Bits.....	83
Serial Response Timeout.....	83
Retries.....	83
Baud Rate, Stop Bits, Parity, Response Timeout, ACK/NAK Handshaking.....	83
Errors.....	83
SSI Communication Notes.....	83
Encapsulation of RSM Commands/Responses over SSI.....	84
Example Transaction.....	85
Setting SSI Parameters.....	86
SSI Scanning Sequence Examples.....	86
SSI Errors While Scanning.....	86
SSI Interface Parameter Defaults.....	86
SSI Host Parameters.....	87
User Preferences and Miscellaneous Options.....	96
Setting User Preference Parameters.....	96
User Preference Scanning Sequence Examples.....	96

User Preference Errors While Scanning.....	96
User Preferences Parameter Defaults.....	97
User Preferences.....	98
Image Capture Preferences.....	117
Setting Image Capture Parameters.....	117
Image Capture Scanning Sequence Examples.....	117
Image Capture Errors While Scanning.....	117
Image Capture Preferences Parameter Defaults.....	117
Image Capture Preferences Modes and Parameters.....	119
Operational Modes.....	119
Image Capture Autoexposure.....	119
Fixed Exposure.....	120
Analog Gain.....	120
Digital Gain.....	121
Image Capture Illumination.....	121
Image Brightness (Target White).....	122
Image Size (Number of Pixels).....	122
Image Enhancement.....	123
Image File Format Selector.....	124
Bits Per Pixel.....	124
Image Rotation.....	125
JPEG Image Options.....	125
JPEG Size Value.....	126
JPEG Quality Value.....	126
Snapshot Aiming Illumination.....	127
Gain/Exposure Priority for Snapshot Mode.....	127
Snapshot Mode Timeout.....	128
Silence Operational Mode Changes.....	128
Image Cropping.....	129
Crop to Pixel Addresses.....	129
Video View Finder.....	130

Symbologies.....	131
Symbologies Parameter Defaults.....	131
Enable/Disable All Code Types.....	136
UPC-A.....	137
UPC-E.....	137
UPC-E1.....	137
EAN-8/JAN-8.....	138
EAN-13/JAN-13.....	138
Bookland EAN.....	139
Bookland ISBN Format.....	139
ISSN EAN.....	140
User-Programmable Supplementals.....	140
UPC/EAN/JAN Supplemental Redundancy.....	141
UPC/EAN/JAN Supplemental AIM ID Format.....	141
Transmit UPC-A Check Digit.....	142
Transmit UPC-E Check Digit.....	142
Transmit UPC-E1 Check Digit.....	143
UPC-A Preamble.....	143
UPC-E Preamble.....	144
UPC-E1 Preamble.....	145
Convert UPC-E to UPC-A.....	145
Convert UPC-E1 to UPC-A.....	146
EAN/JAN Zero Extend.....	146
Coupon Report.....	147
UPC Reduced Quiet Zone.....	147
Linear UPC/EAN.....	148
Decode UPC/EAN/JAN Supplementals.....	148
Code 128.....	151
Set Lengths for Code 128.....	151
GS1-128 (formerly UCC/EAN-128).....	152
ISBT 128.....	153
ISBT Concatenation.....	153
Check ISBT Table.....	154
ISBT Concatenation Redundancy.....	154

Code 128 <FNC4>.....	155
Code 128 Security Level.....	155
Code 128 Reduced Quiet Zone.....	156
Code 39.....	157
Convert Code 39 to Code 32.....	157
Code 32 Prefix.....	157
Set Lengths for Code 39.....	158
Code 39 Check Digit Verification.....	159
Transmit Code 39 Check Digit.....	160
Code 39 Full ASCII Conversion.....	160
Code 39 Security Level.....	161
Code 39 Stitching.....	162
Code 39 Stitching Security Level.....	162
Code 39 Reduced Quiet Zone.....	163
Transmit Code 39 Start/Stop Characters.....	163
Code 93.....	164
Set Lengths for Code 93.....	164
Interleaved 2 of 5 (I 2 of 5).....	166
Set Lengths for Interleaved 2 of 5 (I 2 of 5).....	166
Interleaved 2 of 5 (I 2 of 5) Check Digit Verification.....	167
Transmit I 2 of 5 Check Digit.....	168
Convert Interleaved 2 of 5 (I 2 of 5) to EAN-13.....	168
Febraban.....	169
Interleaved 2 of 5 (I 2 of 5) Security Level.....	169
Interleaved 2 of 5 (I 2 of 5) Reduced Quiet Zone.....	170
Discrete 2 of 5 (D 2 of 5).....	171
Set Lengths for Discrete 2 of 5 (D 2 of 5).....	171
Codabar (NW - 7).....	172
Set Lengths for Codabar.....	173
CLSI Editing.....	174
NOTIS Editing.....	174
Codabar Security Level.....	175
Codabar Upper or Lower Case Start/Stop Characters.....	176
Codabar Mod 16 Check Digit Verification.....	176

Transmit Codabar Check Digit.....	177
MSI.....	177
Set Lengths for MSI.....	178
MSI Check Digits.....	179
Transmit MSI Check Digit(s).....	180
MSI Check Digit Algorithm.....	180
MSI Reduced Quiet Zone.....	180
MSI Security Level.....	181
Chinese 2 of 5.....	182
Korean 3 of 5.....	182
Inverse 1D.....	183
GS1 DataBar Omnidirectional (formerly GS1 DataBar-14).....	183
GS1 DataBar Limited.....	184
GS1 DataBar Expanded.....	184
Convert GS1 DataBar to UPC/EAN/JAN.....	185
GS1 DataBar Security Level.....	185
GS1 DataBar Limited Margin Check.....	186
GS1 Digital Link.....	187
GS1 Digital Link Data Format.....	187
GS1 Digital Link Mode.....	188
GS1 Digital Link Prioritization Timeout.....	189
Redundancy Level.....	189
Security Level.....	190
1D Quiet Zone Level.....	191
Intercharacter Gap Size.....	192
Composite CC-C.....	193
Composite CC-A/B.....	193
Composite TLC-39.....	193
Composite Inverse.....	194
UPC Composite Mode.....	194
Composite Beep Mode.....	195
GS1-128 Emulation Mode for UCC/EAN Composite Codes.....	195
PDF417.....	196
MicroPDF417.....	196

Code 128 Emulation.....	197
Data Matrix.....	198
GS1 Data Matrix.....	198
Data Matrix Inverse.....	198
Decode Data Matrix Mirror Images.....	199
QR Code.....	200
Weblink QR.....	200
GS1 QR.....	200
MicroQR.....	201
Linked QR Mode.....	201
Rectangular Micro QR.....	202
Aztec.....	202
Aztec Inverse.....	203
Han Xin.....	203
Han Xin Inverse.....	204
Grid Matrix.....	204
Grid Matrix Inverse.....	205
Grid Matrix Mirrored.....	205
DotCode.....	206
DotCode Prioritize.....	206
DotCode Inverse.....	207
DotCode Mirrored.....	207
DotCode Erasure Limit.....	208
Macro PDF Features.....	208
Macro PDF User Indications.....	208
Flush Macro PDF Buffer.....	209
Abort Macro PDF Entry.....	209
Postal Codes.....	210
Digimarc Barcode.....	211
Digimarc Parameter Defaults.....	211
Digimarc Digital Watermarks.....	212
Digimarc Data Mode.....	212
Digimarc GIA17 Format.....	213

Digimarc Gift Card Security.....	213
Numeric Barcodes.....	214
Cancel.....	215
Alphanumeric Barcodes.....	216
Cancel.....	216
Alphanumeric Barcodes.....	216
ASCII Character Sets.....	229
Programming Reference.....	237
Symbol Code Identifiers.....	237
AIM Code Identifiers.....	238
Communication Protocol Functionality.....	243
Country Codes.....	244
USB and Keyboard Wedge Country Keyboard Types (Country Codes).....	244
Country Code Barcodes.....	244
Country Code Pages.....	256
Country Code Page Defaults.....	256
Country Code Page Barcodes.....	259
CJK Decode Control.....	266
CJK Control Parameters.....	266
Unicode Output Control.....	266
CJK Output Method to Windows Host.....	266
Non-CJK UTF Barcode Output.....	268
Unicode/CJK Decode Setup with Windows Host.....	270

Setting Up the Windows Registry Table for Unicode Universal Output.....	270
Adding CJK IME on Windows.....	270
Selecting the Simplified Chinese Input Method on the Host.....	271
Selecting the Traditional Chinese Input Method on the Host.....	271
Non-Parameter Attributes.....	273
Model Number.....	273
Serial Number.....	273
Date of Manufacture.....	273
Date of First Programming.....	274
Configuration Filename.....	274
Beeper/LED.....	275
Parameter Defaults.....	275
Beep on Next Bootup.....	276
Reboot.....	276
Host Trigger Session.....	276
Firmware Version.....	276
Scankit Version.....	277
Sample Barcodes.....	278
Sample Code 39.....	278
Sample Code 93.....	278
Sample UPC/EAN.....	278
Sample Code 128.....	280
Sample Interleaved 2 of 5.....	280
Sample Chinese 2 of 5.....	280
Sample Korean 3 of 5.....	280
Sample GS1 DataBar.....	281
Sample PDF417.....	281
Sample Data Matrix.....	282
Sample Aztec.....	282
Sample Grid Matrix.....	282
Sample GS1 DataBar Truncated.....	283

Sample GS1 DataBar Stacked OmniDirectional.....	283
Sample GS1 DataBar Expanded Stacked Barcode.....	284
Sample GS1 DataBar Expanded.....	284
MSI Two Check Digits.....	284
Sample GS1-128.....	284
2D Symbolologies.....	285
Sample GS1 Data Matrix.....	285
Sample QR Code.....	285
Sample GS1 QR.....	285
Sample MicroQR.....	286
Sample Han Xin.....	286
Sample Grid Matrix.....	286

About This Guide

The SP20 Product Reference Guide provides general instructions for setting up, operating, maintaining, programming, and troubleshooting the SP20 cube scanner.

Configurations

Table 1 SP20 Scan Module Configurations

Configuration	Description
SP2002-SR00004ZZWW	SP2002: Single Plane Area Imager, Cube Only, Standard Range, Midnight Black
SP2002-SR00004ZZCN	SP2002: Single Plane Area Imager, Cube Only, Standard Range, Midnight Black – China only
SP2002-SR400000SGW	SP2002-SR Black with Stand (Cable Not Included) KIT: SP2002-SR00004ZZWW Scanner, STND-AD0020-04
SP2002-SR400000SGC	SP2002-SR Black with Stand (Cable Not Included) KIT: SP2002-SR00004ZZCN Scanner, STND-AD0020-04 – China Only

Accessories

This section presents the accessories of the SP20 and their respective descriptions. This includes multiple cable types such as USB and RS-232, as well as mounting options and power supplies.

Part Number	Description
USB Cables	
CBA-HF-UA00-020ZA	Shielded 0.6 m (2 ft.) straight, black USB-A cable.
CBA-HF-UA00-021ZA	Shielded 0.6 m (2 ft.) right-angle connector, black USB-A cable.
CBA-HF-UA00-070ZA	Shielded 2.1 m (7 ft.) straight, black USB-A cable.
CBA-HF-UA00-071ZA	Shielded 2.1 m (7 ft.) right-angle connector, black USB-A cable.
RS-232 Cables	
CBA-HF-RS00-070PA	Shielded 2.1 m (7 ft.) straight, black RS-232 DB9 female cable, TxD on 2, TTL current limit protection.

Part Number	Description
CBA-HF-RS00-071PA	Shielded 2.1 m (7 ft.) right-angle connector, black RS-232 DB9 female cable, TxD on 2, TTL current limit protection.
Power Supplies	
PWR-WUA5V4W0US	5 VDC, 100 - 240VAC, US/CA/MX/JP/TW power supply.
PWR-WUA5V4W04C	5 VDC, 850MA, Brazil, China, EU and Australia adapter plugs Level 6 power supply.
PWR-WUA5V4W0EU	5 V DC, 100 - 240 V AC, power supply, EU/UK.
PWR-WUA5V4W0CN	5 V DC, 100 - 240 V AC, power supply, China.
Mounting Accessories	
STND-AD0020-04	Adjustable Stand.
BRKT-LB0020-04	L Bracket
BRKT-FB0020-04	Flange Bracket.

Notational Conventions

The following conventions make the content of this document easy to navigate.

- **Bold** text is used to highlight the following:
 - Dialog box, window, and screen names
 - Dropdown list and list box names
 - Checkbox and radio button names
 - Icons on a screen
 - Key names on a keypad
 - Button names on a screen
- Bullets (•) indicate:
 - Action items
 - List of alternatives
 - Lists of required steps that are not necessarily sequential
- Sequential lists (for example, those that describe step-by-step procedures) appear as numbered lists.

Icon Conventions

The documentation set is designed to give the reader more visual clues. The following visual indicators are used throughout the documentation set.



NOTE: The text here indicates information that is supplemental for you to know and that is not required to complete a task.



IMPORTANT: The text here indicates information that is important for you to know.



CAUTION: If the precaution is not heeded, you could receive a minor or moderate injury.



WARNING: If danger is not avoided, you CAN be seriously injured or killed.



DANGER: If danger is not avoided, you WILL be seriously injured or killed.

Service Information

If you have a problem with your equipment, contact Zebra Global Customer Support for your region.

Contact information is available at: zebra.com/support. When contacting support, please have the following information available:

- Serial number of the unit
- Model number or product name
- Software/firmware type and version number

Zebra responds to calls by email, telephone, or fax within the time limits set forth in support agreements.

If your problem cannot be solved by Zebra Customer Support, you may need to return your equipment for servicing and will be given specific directions. Zebra is not responsible for any damages incurred during shipment if the approved shipping container is not used. Shipping the units improperly can possibly void the warranty.

If you purchased your Zebra business product from a Zebra business partner, contact that business partner for support.

Getting Started

The SP20 Series Scan Module is for customers looking for a presentation scanning option that easily integrates into their Self-Checkout (SCO) or Kiosk solution.

Unpacking the Scanner

Remove the scanner from its packaging and inspect it for damage. The following items are included in the package:

- SP20 scanner
- Quick Start Guide
- USB or RS-232 cable (Optional - depending on the configuration purchased)
- Stand (Optional - depending on the configuration purchased)

Features

Figure 1 SP20 Scan Module

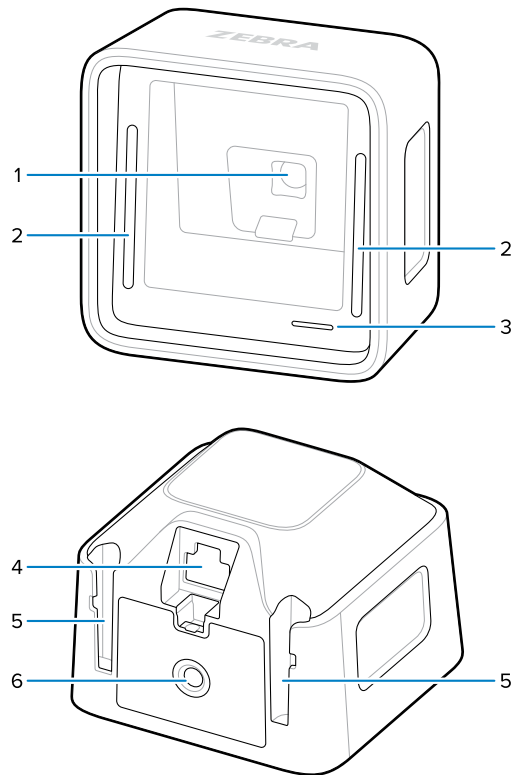


Table 2 SP20 Scan Module


Item	Feature	Description
1	Camera aperture	Captures images for processing
2	Indicator bars	Indicate the following: • Power on state • Active scan area • Good decode
3	Sound port	Emits device status beeps
4	Host port	Provides power and communication to the scan module
5	Mounting rails	Connect the scan engine to a stand accessory
6	Threaded mount	Universal 1/4"–20 mount for attaching to third party mounting accessories

Installing the SP20 Stand


You can install the SP20 stand on a vertical surface or tabletop.

1. Use the template below to mark the mounting holes on your tabletop or vertical surface.


You can print this template to use it as a guide. If you print this page, ensure the template measures 8 cm x 8 cm (3.15 x 3.15 in.).

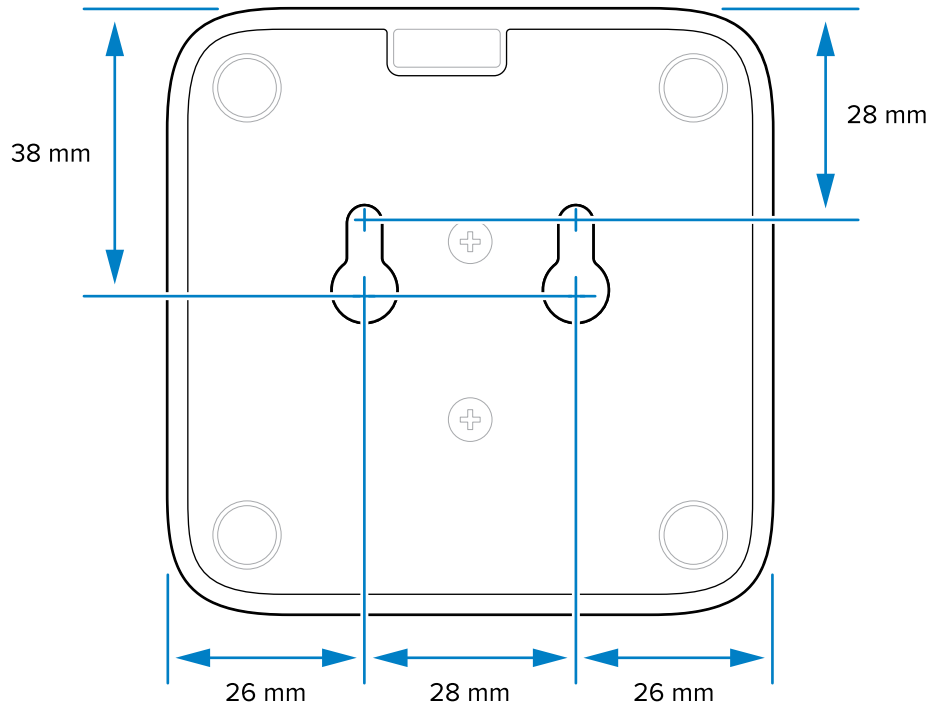


2. Use your marks to drill two pilot holes in your surface.

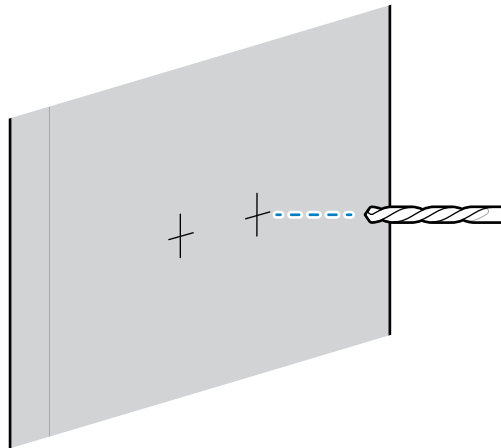

3. Affix two # 8 wood screws in the pilot holes. Leave a minimum of 2.1 mm (.08 in.) clearance between the surface and screw head.

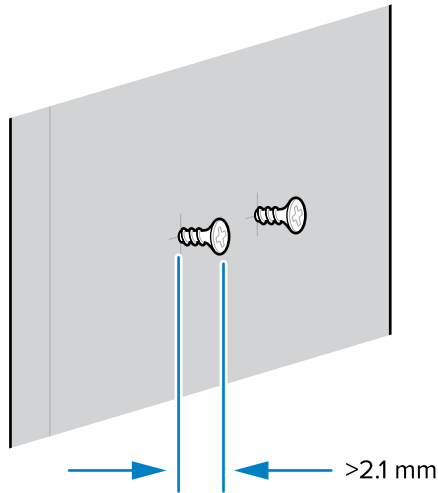


4. Hang the SP20 stand on the wood screws.

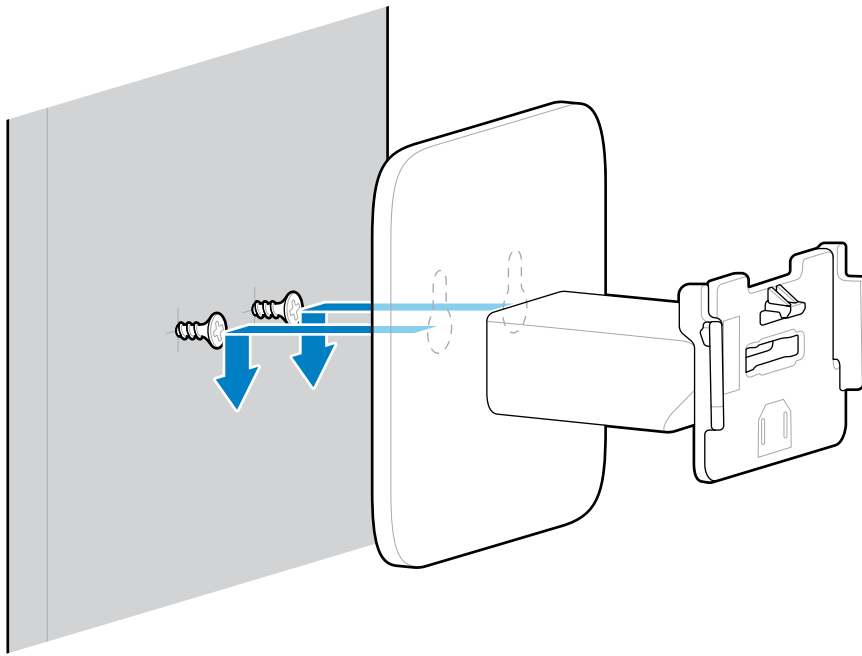


Mounting the SP20 to a Stand

Mount the SP20 on its stand and connect it to a host device. The hands-free scanner's angle can be adjusted to suit your scanning requirements.

1. Align the mounting rails of the stand with the mounting rails on the bottom of the SP20.
2. Slide the stand's mounting rails into the SP20 until the mounting rail's edge is flush with the scanner housing.

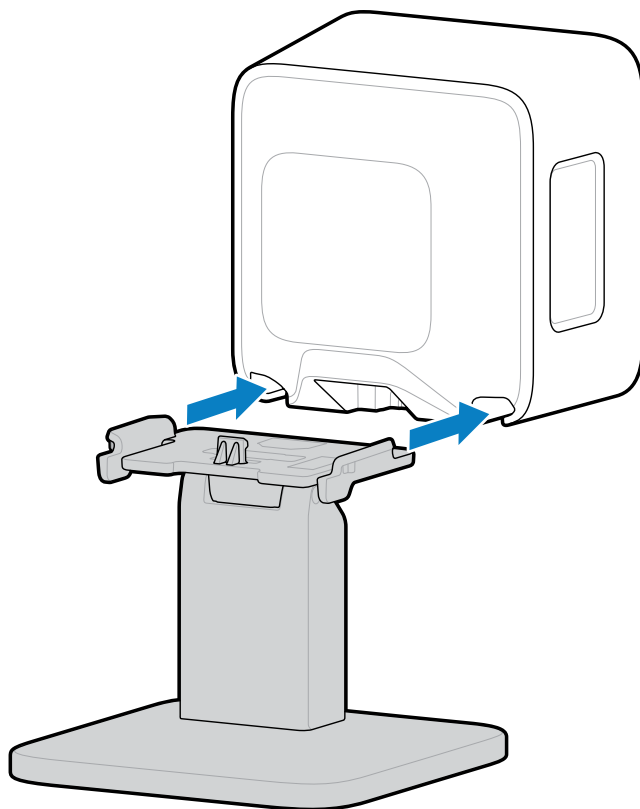

3. Connect the host cable to the scanner's host port.

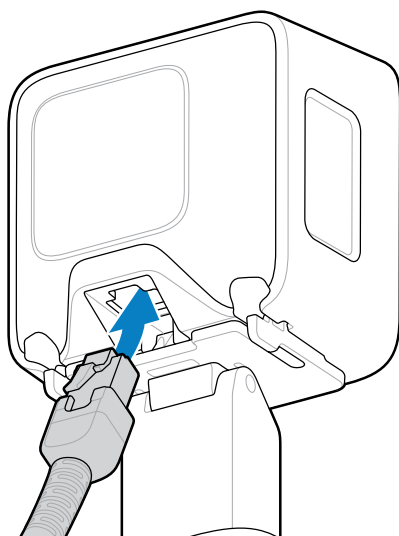

4. Connect the host cable to your host device.
The scanner powers on.
5. Adjust the stand's angle to suit your scanning requirements.
The stand adjusts from -14° to $+30^{\circ}$.


Mounting Options

the SP20 scanner can be mounted directly into your system, on a stand, or mounted to a flange or L-bracket accessory.

Flange Bracket

The flange bracket holds the scanner and includes two sets of mounting options. The oval slots are compatible with a Remulak chassis and the round mounting options are reverse-compatible with panels.


Figure 2 Flange Bracket Mounting

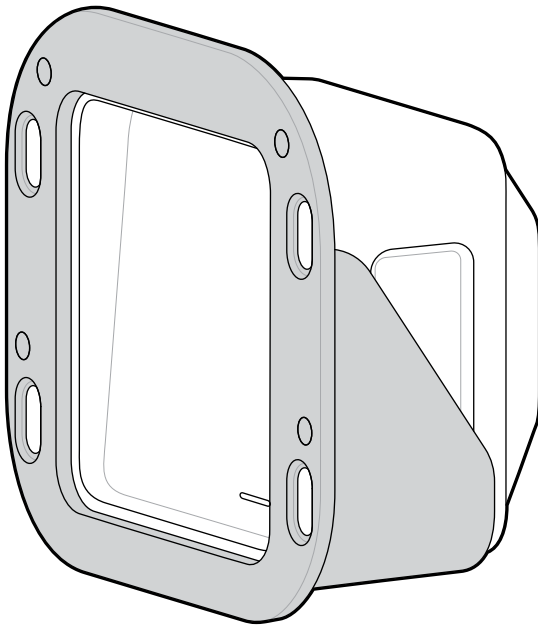

L-Bracket

The L-bracket offers multiple mounting configurations. This ensures the SP20 can integrate successfully in many different kiosk configurations.


Figure 3 L-Bracket Mounting Options

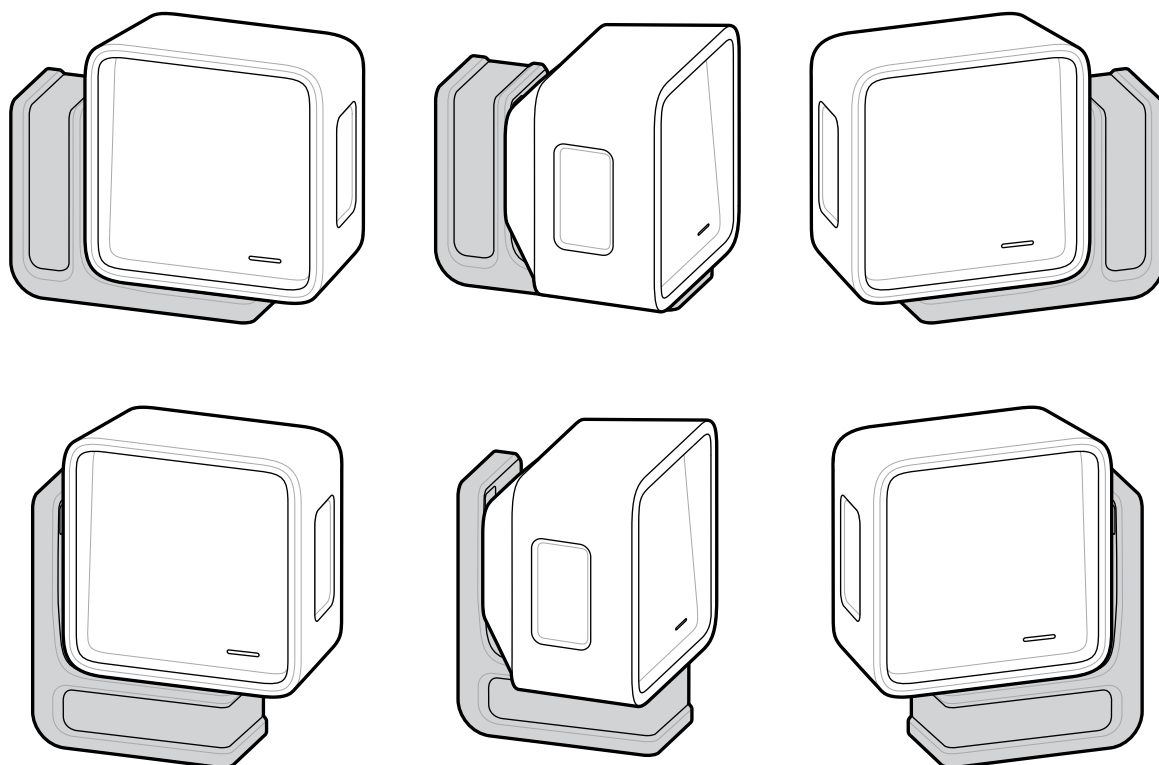



Mounting Dimensions

Use these dimension diagrams to plan the installation of the SP20 scanner.

Scan Engine Dimensions

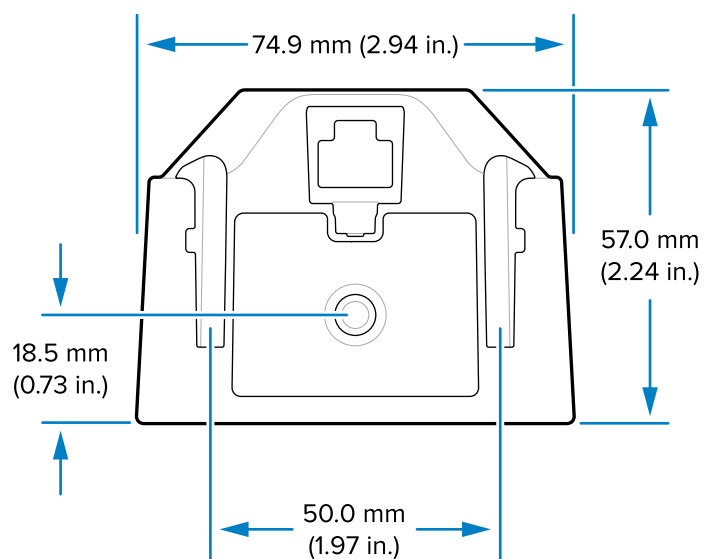


Flange Bracket Dimensions

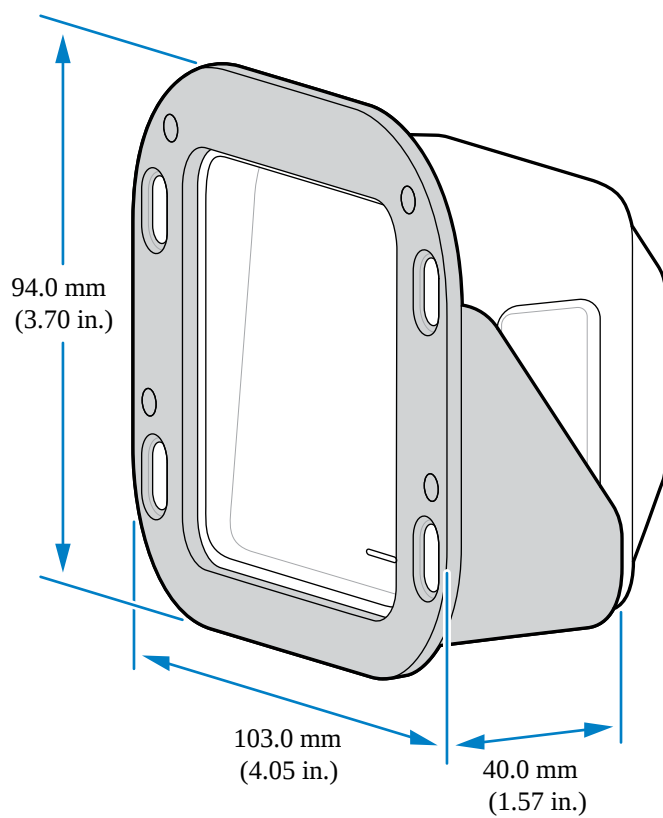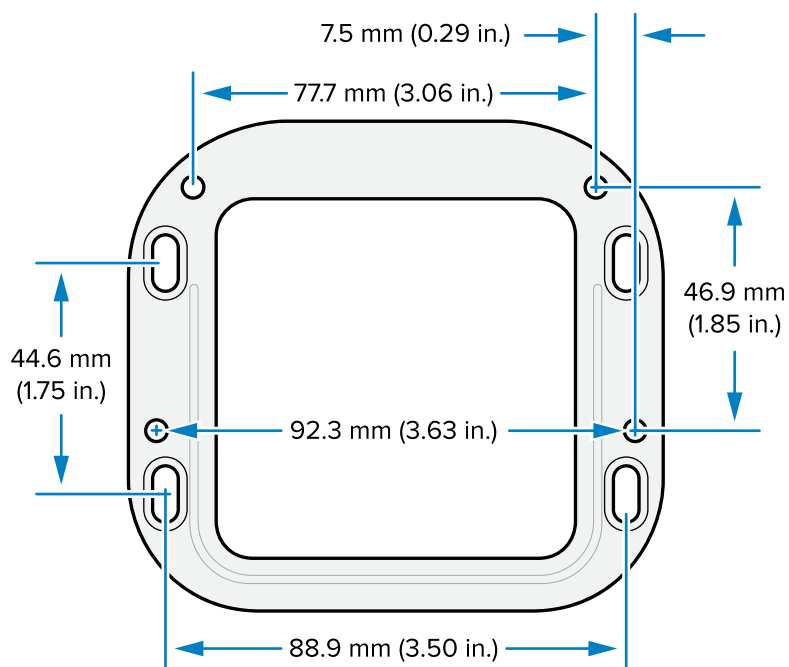

L Bracket Dimensions


Figure 4 L-Bracket Dimensions

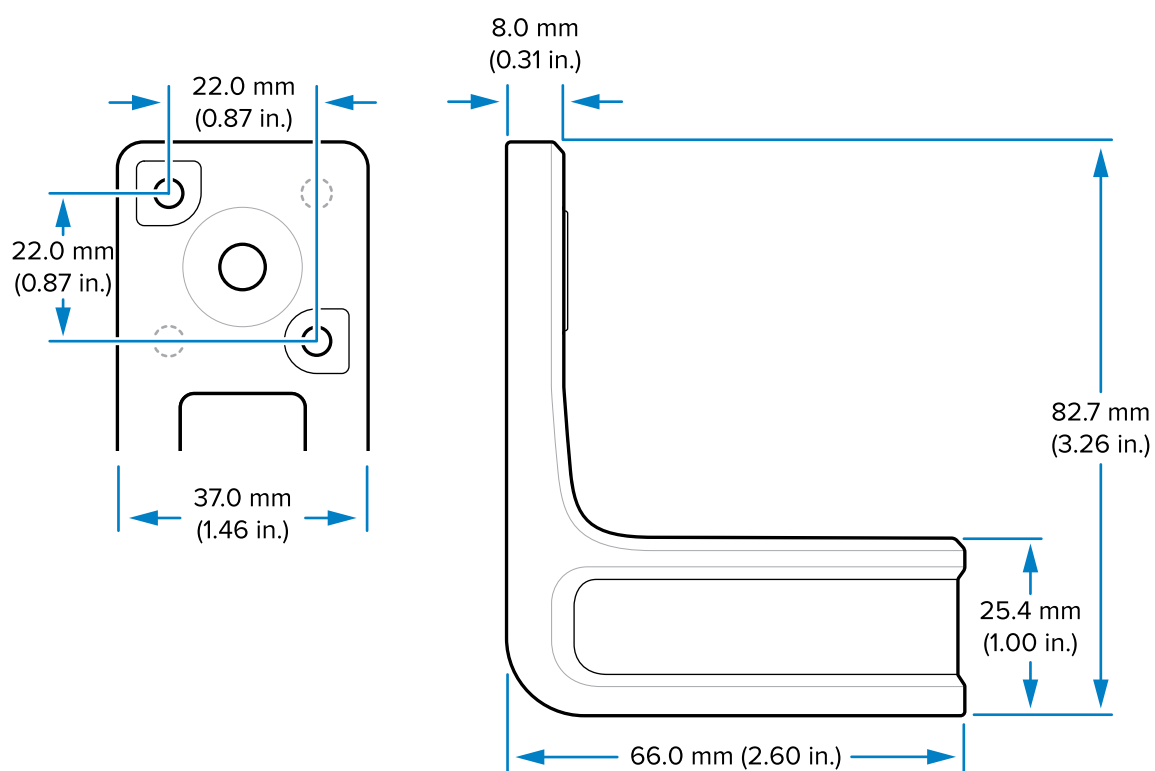

Mounting the SP20

The SP20 mounts to a bracket accessory to enable installation in a larger system.


1. Secure the SP20 to a bracket using the 8 mm (1/4"-20) screw provided.

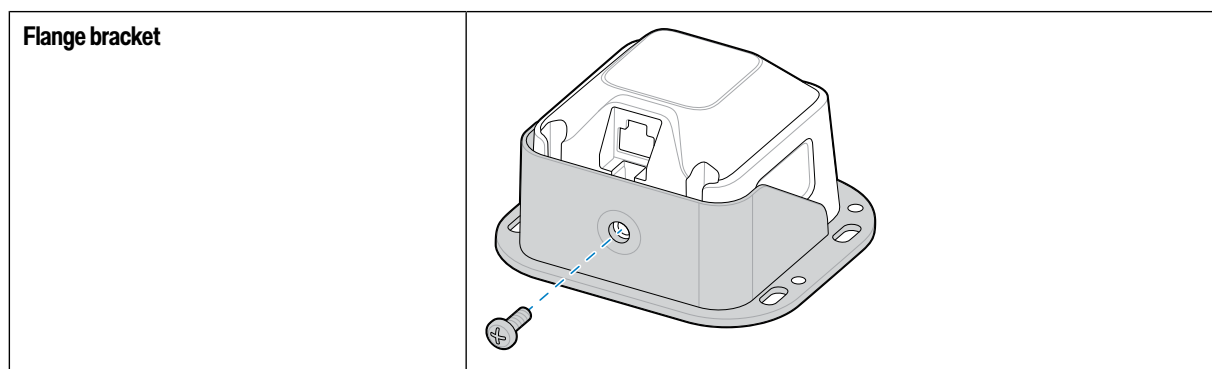

L-bracket




NOTE: Your mounting configuration may be different than the illustration. See [Mounting Options](#).

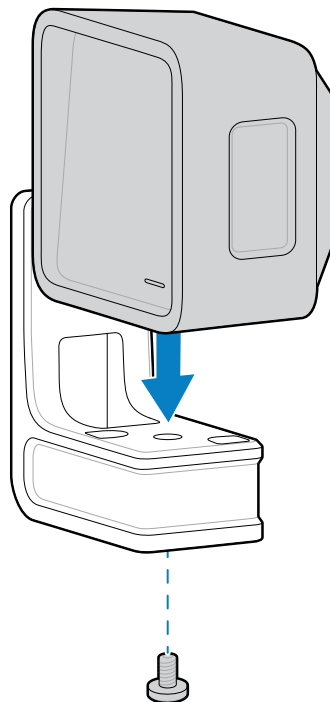


NOTE: Use screws that do not penetrate more than 6.7 mm (0.26 in.) into the bottom housing of the SP20.

2. Insert the host cable into the port.

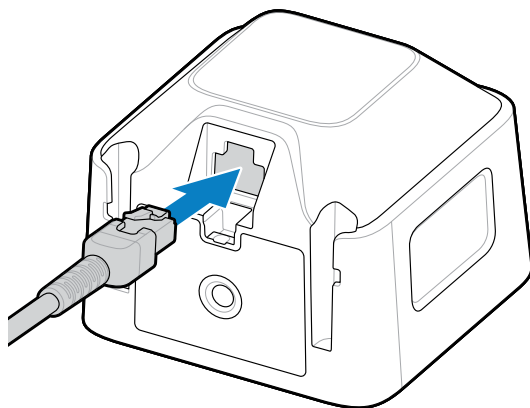

3. Select an appropriate fastener to secure the bracket to your system and use it in the relevant mounting holes on the bracket to secure the bracket to your system.

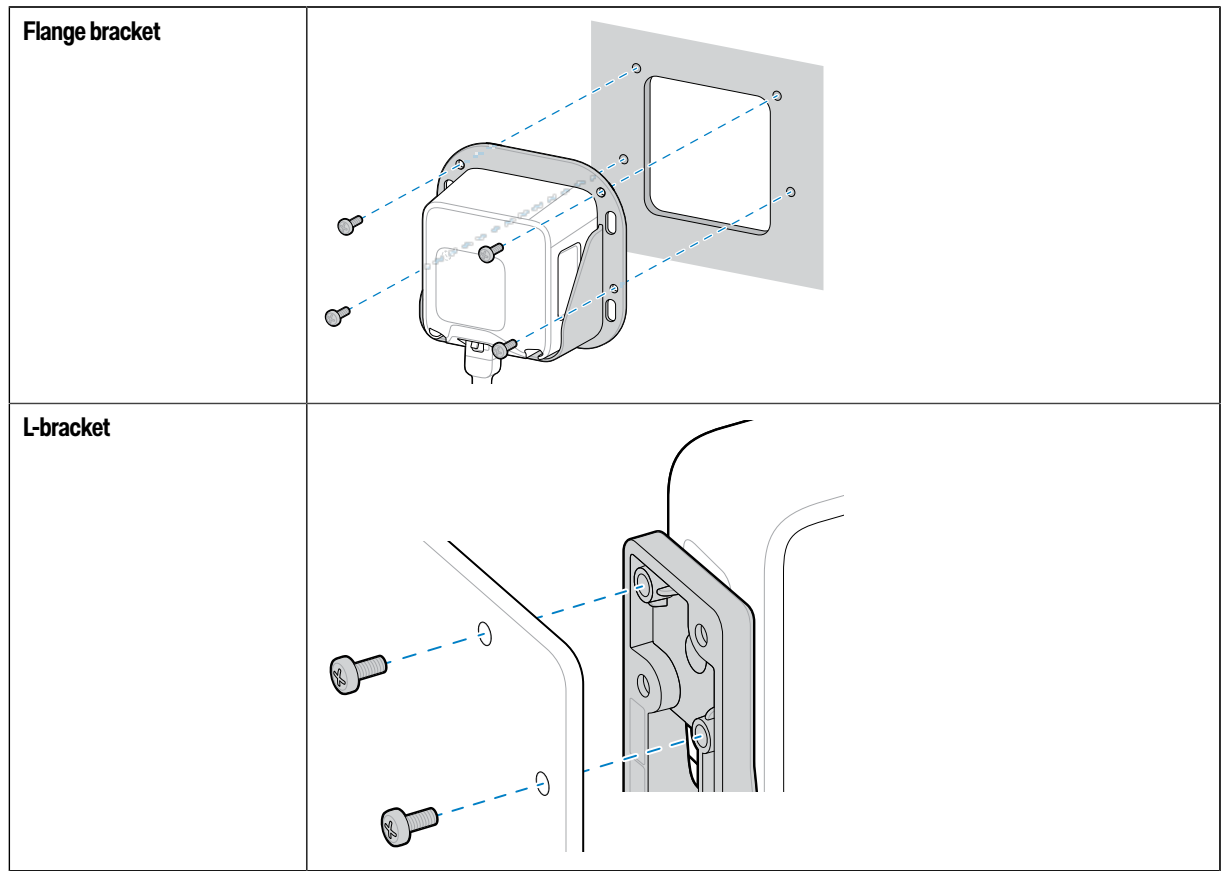

NOTE: Use M3 screws that do not penetrate more than 4.5 mm (0.17 in.) into the bracket housing.

Host Interfaces

The scan module connects to a host device via either a USB or RS-232 cable. The cable powers the device and provides communication functionality between the scan module and host device.

- **USB host connection:** The scanner defaults to the HID keyboard interface type. To select other USB interface types, scan the programming barcode menus or use the Windows-based programming tool 123Scan. For international keyboard support, use [Country Codes](#) to program the keyboard interface with a USB host.
- **TTL-level RS-232 host connection:** The scanner defaults to the standard RS-232 interface type. To modify communication between the scanner and the host, scan the barcode menus or use the Windows-based programming tool 123Scan.

123Scan and Software Tools

This section describes the Zebra software tools available for customizing scanner operation.

123Scan

123Scan is a software tool from Zebra Technologies that simplifies scanner setup and more.

Intuitive enough for first-time users, the 123Scan wizard guides users through a streamlined setup process. Settings are saved in a configuration file that can be printed as a single programming barcode for scanning, emailed to a smart phone for scanning from its screen or downloaded to the scanner using a USB cable.

Through 123Scan a user can:

- Configure a scanner using a wizard.
 - Program the following scanner settings.
 - Beeper tone/volume settings.
 - Enable/disable symbologies.
 - Communication settings.
 - Modify data before transmission to a host using:
 - Advanced Data Formatting (ADF) - Scans one barcode at a time.
 - Preferred Symbol - Single out one barcode on a label of many (select scanners).
- Load parameter settings to a scanner via the following:
 - Barcode scanning.
 - Scan a paper barcode.
 - Scan a barcode from a PC screen.
 - Scan a barcode from a smart phone screen.
 - Download over a USB cable.
 - Load settings to one scanner.
 - Stage up to 10 scanners simultaneously (Powered USB Hub recommended with 0.5 amp / port).
- Validate scanner setup.
 - View scanned data within the utility's Data view screen.

- Capture an image and save it to a PC within the utility's Data view screen.
- Review settings using the Parameter Report.
- Clone settings from an already deployed scanner from the Start screen.
- Upgrade scanner firmware.
 - Load settings to one scanner.
 - Stage up to 10 scanners simultaneously (Powered USB Hub recommended with 0.5 amp/port).
- View statistics, such as:
 - Asset tracking information.
 - Time and usage information.
 - Barcodes scanned by symbology.
- Generate the following reports.
 - Barcode Report - Programming barcode, relevant parameter settings, and supported scanner models.
 - Parameter Report - Parameters programmed within a configuration file.
 - Inventory Report - Scanner asset tracking information.
 - Validation Report - Scanned data from the Data view.
 - Statistics Report - All statistics retrieved from the scanner.

For more information, go to zebra.com/123Scan.

Communication with 123Scan

Use a USB cable to connect the scanner to a Windows host computer running 123Scan.

123Scan Requirements

- Host computer running Windows 10 or 11
- Scanner
- USB cable

123Scan Information

Use these links to learn more about using 123Scan and Zebra software tools.

For more information on 123Scan, go to zebra.com/123Scan

For a one-minute tour of 123Scan, go to [How-to Videos For Zebra Scanners](#)

To see a list of all of our software tools, go to zebra.com/scannersoftware

Scanner SDK, Other Software Tools, and Videos

Tackle all your scanner programming needs with our diversified set of software tools. Whether you need to stage a device or develop a fully featured application with image and data capture and asset management, these tools help you every step of the way.

To download any of the following free tools, go to: zebra.com/scannersoftware.

- 123Scan configuration utility
- SDKs
 - Scanner SDK for Windows
 - Scanner SDK for Linux
 - Scanner SDK for Android
 - Scanner SDK for iOS
- Drivers
 - OPOS driver
 - JPOS driver
 - USB CDC driver
- Scanner Management Service (SMS) for Remote Management
 - Windows
 - Linux
- Mobile Apps
 - Scanner Control App
 - Android
 - iOS
 - Scan-To-Connect Utility
 - Android
 - Windows
- How-To-Videos



NOTE: For a list of SDK-supported scanner functionality by communication protocol, see [Communication Protocol Functionality](#).

Advanced Data Formatting

Advanced Data Formatting (ADF) allows customizing data before transmission to the host device. Use ADF to edit scanned data to suit the host application's requirements. With ADF you scan one barcode per decode session. ADF is programmed using 123Scan.

For a video on Creating an Advanced Data Formatting (ADF) Rule using 123Scan, go to [How-to Videos For Zebra Scanners](#).

For additional information, refer to the Advanced Data Formatting Programmer Guide.

Preferred Symbol

Preferred Symbol is a barcode prioritization technique that enables the scanner to focus on decoding high-priority barcodes. The Preferred Symbol is the only barcode that is decoded and output within the preset Preferred Symbol Timeout. During this time, the scanner attempts to decode the prioritized barcode and reports only this barcode.

For more information, refer to the Multicode Data Formatting and Preferred Symbol User Guide, p/n MN-002895-xx.

To program Preferred Symbol via 123Scan, select **123Scan > Configuration Wizard > Symbologies** screen, and then select **Preferred Symbol** from the drop-down menu. Preferred Symbol programming is saved in the 123Scan configuration file.

Figure 5 Preferred Symbol Programming Options

Preferred Symbol

☐ Preferred Symbol [What is this?](#)

Options

Prioritized symbologies

Preferred Symbol Options [Edit](#)

Identify exact bar code

Preferred symbol criteria [View / Edit](#)

Prioritization time (ms) [What is this?](#)

Data Capture

This section provides general instructions for scanning, and the scanner's beeper and LED definitions. Scanning a barcode and attempting to decode its data is known as a **decode session**.

Scanning

For optimal scanning performance, ensure the surface covered by the active scan area is free of designs (for example, stripes or patterns). Ideally, the area should be a light, solid color.

The scanner uses an object detection wakeup system that provides a high swipe speed and reduces power consumption. The system includes an infrared mode with two power modes: Idle mode, which utilizes infrared LEDs not visible to the human eye, and Full Illumination Mode. Presenting an object to the scanner activates full illumination and removing the object returns the scanner to Idle Mode.


The scanner also has a traditional LED detection wakeup system. The red Illumination has two power level modes behave the same way the the IR system does, but use traditional LEDs for both Idle and Full Illumination Mode.

When the object presented in the Field of View (FOV) includes a barcode, the scanner scans the barcode, and if the barcode is successfully decoded, the illumination LEDs return to Idle Mode when the object is removed.

Active Scan Area

The active scan area is the area in front of the scanner window opening in which a barcode can be decoded, represented by the dotted area.

To scan a barcode, ensure all cable connections are secure, and present the item anywhere within the active scan area with the barcode facing the scanner window.

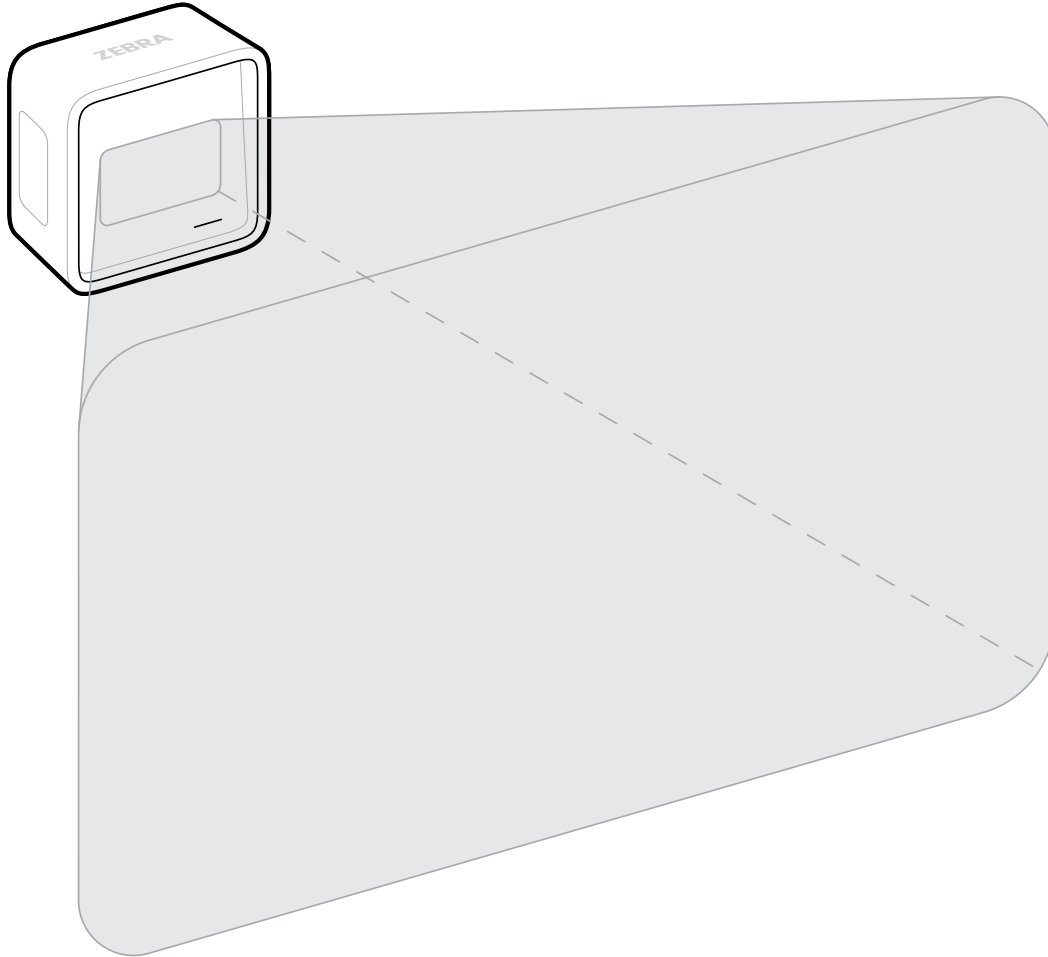Figure 6 SM20 Active Scan Area

The nominal dimensions of the scan area at the face of the scanner are 52.8 mm (2.08 in.) x 33 mm (1.3 in.).

Beeper and LED Indicators

In addition to beep sequences, the scanner includes an array of two bi-color (green/red) LEDs to display system status and alerts.

The following table defines beep sequences that occur during scanner operation and programming, and LED indications that display during scanning.

Table 3 Scanner Beeper and LED Indications

Beeper Sequence	LED	Indication
Standard Use		
Low, medium, high	Green	Power up
User-configured	Green (blink off)	A barcode was decoded

Table 3 Scanner Beeper and LED Indications (Continued)

Beeper Sequence	LED	Indication
None	Center green LED remains ON	Presentation mode is on
4 low	Red	Transmission error
5 low	Red	Conversion or format error
High, High, Low	Red	RS-232 receive error
High	None	A <BEL> character is received over RS-232
None	Red Blinking	Scanner is disabled
Image Capture		
Low	All green, blinking	Snapshot mode started
Low	Green (default) LED mode	Snapshot mode complete
High, low	Green (default) LED mode	Snapshot mode time-out
Parameter Programming		
Low, high	Red	Input error: incorrect bar code, programming sequence, or Cancel scanned
High, low	Green	Number expected; enter value using numeric bar codes
High, low, high, low	Green	Successful program exit with a change in parameter setting
ADF Programming		
High, Low	Green	Number expected, enter another digit. Add leading zeros to the front if necessary.
Low, Low	Green	Alphanumeric expected, enter another alphanumeric character or scan the End of Message barcode
High, High	Green blinking	ADF criteria or action is expected, enter another criteria or action or scan the Save Rule barcode
High, Low, Low	Green	All criteria or actions cleared for current rule, continue entering rule
High, Low, High, Low	Green (turns off after blinking)	Rule saved. Rule entry mode exited.
Low, High	Red	Rule error. Entry error, wrong barcode scanned, or criteria/action list is too long for a rule. Re-enter criteria or action.
Low	Green	Deleted last saved rule. The current rule is left intact.
Low/high/high	Green	All rules deleted

Table 3 Scanner Beeper and LED Indications (Continued)

Beeper Sequence	LED	Indication
Low, High, Low, High	Red	Out of rule memory. Erase some existing rules, then try to save rule again.
Low, High, Low	Green (turns off after blinking)	Cancel rule entry. Rule entry mode exited because of an error or the user asked to exit rule entry.
Macro PDF		
2 Low	None	Buffered File ID error. A barcode not in the current MPDF sequence was scanned.
2 Long Low	None	File ID error. A barcode not in the current MPDF sequence was scanned.
3 Long Low	None	Out of memory. There is not enough buffer space to store the current MPDF symbol.
4 Long Low	None	Bad symbology. Scanned a 1D or 2D barcode in an MPDF sequence, a duplicate MPDF label, a label in an incorrect order, or trying to transmit an empty or illegal MPDF field.
5 long low	None	Flushing MPDF buffer
Fast Warble	None	Aborting MPDF sequence
Low, High	None	Flushing an already empty MPDF buffer
LED Indicators		
None	Slow Blinking Green	Scanner connected to 123Scan
None	Fast Blinking Red	File being transferred to the scanner (parameters and firmware)
None	Slow Blinking Red	Firmware being activated on the scanner, loaded into memory
None	Solid Green	Programming completed successfully (parameters and firmware)
None	Solid Red	Error State

Maintenance and Troubleshooting

This section provides suggested maintenance and troubleshooting instructions.

Maintenance

Suggested maintenance and cleaning tips for your device.

Known Harmful Ingredients

This section lists substances that should be prevented from coming into contact with the device.

- Acetone
- Ammonia solutions
- Aqueous or alcoholic alkaline solutions
- Aromatic and chlorinated hydrocarbons
- Benzene
- Carboic acid
- Compounds of amines or ammonia
- Ethanolamine
- Ethers
- Ketones
- TB-lysoform
- Toluene
- Trichloroethylene

Approved Cleaners

- Isopropyl alcohol 70% (including pre-moistened wipes).

Cleaning the Scanner

Routinely cleaning the scan window is required. A dirty window may affect scanning accuracy. Do not allow any abrasive material to touch the window.

- Dampen a soft cloth with one of the approved cleaning agents listed above or use pre-moistened wipes.
- Gently wipe all surfaces, including the front, back, sides, top, and bottom. Never apply liquid directly to the scanner. Be careful not to let liquid pool around the scan window, cable connectors, or any other area on the device.
- Do not spray water or other cleaning liquids directly onto the scan window.
- Wipe the scan window with a lens tissue or other material suitable for cleaning optical material, such as eyeglasses.
- Immediately dry the scan window after cleaning to prevent streaking.
- Allow the unit to air dry before use.
- Scanner Connectors
 - a) Dip the cotton portion of a cotton-tipped applicator in isopropyl alcohol.
 - b) Rub the cotton portion of the cotton-tipped applicator back and forth across the connectors at least three times, leaving no cotton residue on them.
 - c) Use the cotton-tipped applicator dipped in alcohol to remove grease and dirt near the connector area.
 - d) Use a dry cotton-tipped applicator and rub the cotton portion of the cotton-tipped applicator back and forth across the connectors at least three times. Do not leave any cotton residue on the connectors.

Troubleshooting



NOTE: If you still experience problems after following the instructions in the table, contact the distributor or call support.

Table 4 Troubleshooting

Problem	Possible Cause	Possible Solution
Indicator bars do not illuminate when a barcode is presented.	No power to the scanner.	If the configuration requires a power supply, reconnect the power supply.
	Incorrect host interface cable is used.	Connect the correct host interface cable.
	Interface/power cables are loose.	Reconnect cables.
	Scanner is disabled.	For IBM 468x and USB IBM hand-held, IBM table-top, and OPOS modes, enable the scanner via the host interface. Otherwise, see the technical person in charge of scanning.
	If using RS-232 Nixdorf B mode, CTS is not asserted.	Assert CTS line.

Table 4 Troubleshooting (Continued)

Problem	Possible Cause	Possible Solution
Indicator bars illuminate but barcodes do not decode.	The scanner is not programmed for the correct barcode type.	Program the scanner to read that type of barcode. See Symbologies .
	Barcode symbol is unreadable.	Scan test symbols of the same barcode type to determine if the barcode is defaced.
	The symbol is not completely inside illumination.	Move the symbol completely within the illumination. Move the symbol completely within the field of view.
	Distance between SP20 and barcode is incorrect.	Move the scanner closer to or further from the barcode. See Decode Ranges .
The scanner decodes barcode, but does not transmit the data to the host.	The scanner is not programmed for the correct host type.	Scan the appropriate host type programming barcode. Go to the section corresponding to the relevant host type.
	Interface cable is loose.	Re-connect the cable.
	If the beeper emits four long low beeps, a transmission error occurred. This occurs if a unit is not properly configured or connected to the wrong host type.	Set the communication parameters to match the host's setting.
	If the beeper emits 5 low beeps, a conversion or format error occurred.	Configure the scanner's conversion parameters properly.
	If the beeper emits low/high/low beeps, it detected an invalid ADF rule.	Program the correct ADF rules. Refer to the Advanced Data Formatting Programmer Guide.
Host displays scanned data incorrectly.	The scanner is not programmed to work with the host.	Scan the appropriate host type programming barcode.
		For RS-232, set the scanner's communication parameters to match the host's settings.
		Program the proper editing options (for example, UPC-E to UPC-A Conversion).
The beeper emits short low/short medium/short high beep sequence (power-up beep sequence) more than once.	The USB host may put the scanner in a state where power to the scanner is cycled on and off more than once.	Normal during host reset.
The beeper emits 4 short high beeps during decode attempt.	Scanner has not completed USB initialization.	Wait several seconds and scan again.
The beeper emits low/low/low/extra low beeps when not in use.	RS-232 receive error.	Normal during host reset. Otherwise, set the scanner's RS-232 parity to match the host setting.
The beeper emits low/high beeps during programming.	Input error, incorrect barcode or Cancel barcode was scanned.	Scan the correct numeric barcodes within range for the parameter programmed.

Table 4 Troubleshooting (Continued)

Problem	Possible Cause	Possible Solution
The beeper emits low/high/low/high beeps during programming.	Out of host parameter storage space.	Scan Default Parameters .
	Out of memory for ADF rules.	Reduce the number of ADF rules or the number of steps in the ADF rules.
	During programming, indicates out of ADF parameter storage space.	Erase all rules and re-program with shorter rules.
The beeper emits low/high/low beeps.	ADF transmit error.	Refer to the Advanced Data Formatting Guide for information.
	Invalid ADF rule is detected.	Refer to the Advanced Data Formatting Guide for information.
The beeper emits a power-up beep after changing USB host type.	The USB bus re-established power to the scanner.	Normal when changing USB host type.
The beeper emits one high beep when not in use.	In RS-232 mode, a <BEL> character was received and Beep on <BEL> option is enabled.	Normal when Beep on <BEL> is enabled and the scanner is in RS-232 mode.
The beeper emits frequent beeps.	Inadequate power supplied to the scanner.	Check the system power. If the configuration requires a power supply, re-connect the power supply.
	Incorrect host interface cable is used.	Verify that the correct host interface cable is used. If not, connect the correct host interface cable.
	Interface/power cables are loose.	Check for loose cable connections and re-connect cables.
The beeper emits five long low beeps after a barcode is decoded.	Conversion or format error was detected. The scanner conversion parameters are not properly configured.	Ensure the scanner conversion parameters are properly configured.
	Conversion or format error was detected. An ADF rule was set up with characters that cannot be sent for the host selected.	Change the ADF rule, or change to a host that can support the ADF rule.
	Conversion or format error was detected. A barcode was scanned with characters that cannot be sent for that host.	Scan a different barcode, or change to a host that can support the barcode.
The beeper emits a high, low beeper sequence.	An unsupported USB device was plugged into the USB host port, and/or the device failed enumeration.	Disconnect the unsupported device.

Dump Scanner Parameters


To debug a scanner issue, scan the following barcode with the scanner connected in USB HID keyboard mode to Microsoft® Windows Notepad or Wordpad or via RS-232 to Windows HyperTerminal. This outputs all the scanner's asset tracking information and parameter settings to a text document.

Refer to the parameter numbers to interpret the parameter/attribute numbers in the output.



NOTE: Use 123Scan if available as an alternative to using this feature. 123Scan is the preferred method for outputting scanner information.

To select the timeout between decodes for the same symbol, scan the following barcode and then scan two barcodes from [Numeric Barcodes](#) that correspond to the desired interval in 0.1-second increments.



Specifications

This section provides information regarding the scanner's electrical interfaces, technical specifications, and decode ranges.

Go to <https://www.zebra.com/sp20-info> for the scanner's technical specifications page.

Electrical Interface

Table 5 SP20 - USB and Serial Electrical Interface

Pin No.	Name	Description
1	Cable ID	Cable detection input.
2	5 V DC	USB 5 V DC signal. This is an input to indicate that the system is connected to a host. Input power is 5 V DC +/- 5%, 500 mA max.
3	GND	Power supply ground input and signal ground reference.
4	RS-232 TXD	Serial Mode: Serial data transmit output. It drives the serial data receive input on the host device.
5	USB D+ RS-232 RXD and RS-232 TXD (Host)	USB: D+ Signal, 1/2 of differential pair for USB Communication. Serial Mode: Serial data receive input. It is driven by the serial data transmit output on the host device and Serial Mode: Data transmitted from the host.
6	RS-232 RTS	Serial Mode: Request-to-send handshaking output line. It may be optionally used by the scanner to signal to the host device that data is available to send. It can only be utilized in conjunction with the host CTS line.
7	USB D- RS-232 CTS and RS-232 RTS (Host)	USB: D- Signal, 1/2 of differential pair for USB communication. Serial Mode: Clear-to-send handshaking input line. It may be optionally used by the host device to signal the scanner that it may commence transmitting data. It can be used only in conjunction with the host RTS line.
8	DOWNLOAD	This signal is used to begin the Flash Download operation when asserted high.

Table 5 SP20 - USB and Serial Electrical Interface (Continued)

Pin No.	Name	Description
9	NC	No connection.
10	NC	No connection.

SM20 Decode Distances

The following table lists the typical distances for selected barcode densities. The minimum element width (or "symbol density") is the width in mils of the narrowest element (bar or space) in the symbol.

Table 6 Typical SM20 Decode Distances

Symbol Density/Barcode Type	Near	Far
3 mil Code 39	1.8 cm (0.7 in.)	6.4 cm (2.5 in.)
5 mil Code 39	0.0 cm (0.0 in.)	13.97 cm (5.5 in.)
20 mil Code 39	0.0 cm (0.0 in.)	40.64 cm (16 in.)
3 mil Code 128	1.8 cm (0.7 in.)	5.8 cm (2.3 in.)
5 mil Code 128	0.0 cm (0.0 in.)	12.7 cm (5.0 in.)
6.67 mil PDF417	0.0 cm (0.0 in.)	11.43 cm (4.5 in.)
100% UPCA	0.0 cm (0.0 in.)	25.4 cm (10 in.)
10 mil Data Matrix	0.0 cm (0.0 in.)	12.7 cm (5.0 in.)
20 mil QR Code	0.0 cm (0.0 in.)	19.81 cm (7.8 in.)

USB Interface

This section describes how to set up the scanner with a USB host. The scanner connects directly to a USB host, or a powered USB hub, which powers it. The scanner ships with the settings shown in [USB Parameter Defaults](#). If the default values suit requirements, programming is not necessary.

USB Parameter Defaults

Table 7 USB Interface Parameter Defaults

Parameter	Default
USB Device Type	USB HID Keyboard
Ignore Unknown Characters	Send Barcodes With Unknown Characters
Product ID (PID) Type	Host Mode Unique
Product ID (PID) Value	0
EC Level	0
TGCS (IBM) USB Beep Directive	Ignore
TGCS (IBM) USB Barcode Configuration Directive	Ignore
IBM Scanner Generic Management Information	Disable
IBM Scanner Vendor Specific Management Information	Disable
USB Convert Unknown to Code 39	Disable
USB IBM Long Direct I/O	Disable
TGCS (IBM) USB Specification Version	Version 2.2
TGCS (IBM) USB Direct I/O Beep	Honor
IBM Flash Update	Disable
USB Keystroke Delay	No Delay
USB Caps Lock Override	Do Not Override Caps Lock Key (Disable)
Keypad Emulation	Enable
Keypad Emulation with Leading Zero	Enable
Function Key Mapping	Disable

Table 7 USB Interface Parameter Defaults (Continued)

Parameter	Default
Convert Case	No Case Conversion
USB Keyboard FNI Substitution	Disable
USB Polling Interval	3 msec
Quick Keypad Emulation	Enable
USB Fast HID	Enable
SNAPI Status Handshaking	Enable
Beep on BEL	Enable
USB CDC Host Variant	Standard USB CDC
USB Static CDC	Enable

USB Device Type

This parameter defines the type of USB device the scanner communicates with.

To select a country keyboard type for the USB HID Keyboard host, see [Country Codes](#).

- When changing USB device types, the scanner resets and issues the standard startup beep sequences.
- When connecting two scanners to a host, IBM does not allow selecting two of the same device type. If you require two connections, select an IBM Table-top USB for one scanner and an IBM Hand-held USB for the second scanner.
- Select OPOS (IBM Hand-held with Full Disable) to completely shut off the scanner when an IBM register issues a Scan Disable command, including aim, illumination, decoding, and data transmission.
- Before selecting USB CDC Host, ensure your host OS has a USB CDC driver installed. For reference, Windows 11 includes a native (built-in) USB CDC driver. To recover a scanner stalled (non-functional) in USB CDC mode:
 - Install a USB CDC Driver
 - For USB CDC Host, send the following two-byte sequences to the decoder. ESC is ASCII 27.
 - Temporarily switch to SSI Over USB CDC: ESC s (lower case s or ASCII 115)
 - Permanently switch to SSI Over USB CDC: ESC S (upper case S or ASCII 83)
 - Temporarily switch to SNAPI: ESC a (lowercase a or ASCII 97).
 - Permanently switch to SNAPI: ESC A (upper case A or ASCII 65)
- Select USB HID POS to communicate over a USB cable with Microsoft's Universal Windows Platform (UWP) applications running on Windows 11 devices.



*USB HID Keyboard



IBM Table-top USB



IBM Hand-held USB



OPOS (IBM Hand-held with Full Disable)



USB CDC Host



SSI over USB CDC



Symbol Native API (SNAPI) without Imaging Interface



Symbol Native API (SNAPI) with Imaging Interface



USB HID POS (Windows 10/11 devices only)

USB Barcodes with Unknown Characters

This option applies only to the USB HID Keyboard and IBM devices. Unknown characters are characters the host does not recognize. Select Send Barcodes With Unknown Characters to send all barcode data except for unknown characters. The scanner does not issue error beeps.

Select Do Not Send Barcodes With Unknown Characters for IBM devices to prevent sending barcodes that contain at least one unknown character to the host, or for USB HID Keyboard devices to send the barcode characters up to the unknown character. The scanner issues an error beep.



*Send Barcodes with Unknown Characters



Do Not Send Barcodes with Unknown Characters

Product ID (PID) Type

Parameter # 1281 (SSI # F8h 05h 01h)

This parameter defines the PID value reported in USB enumeration.



*Host Type Unique (0)



Product Unique (1)



IBM Unique (2)

Product ID (PID) Value

Parameter # 1725 (SSI # F8h 06h BDh)

This parameter sets a Product ID (PID) value.



NOTE: This parameter applies to customers using a Firmware Flash Update per the Toshiba Global Commerce Solutions (TGCS) Universal Serial Bus OEM Point-of-Sale Device Interface.

To set a Product ID value, scan **Set PID Value**, and then scan four numeric barcodes in [Numeric Barcodes](#) that correspond to the value. Enter a leading zero for single-digit numbers. To correct an error, or change a selection, scan [Cancel](#). The range is (0 - 1649). The default is 0.



Set PID Value

ECLevel

Parameter # 1710 (SSI # F8h 06h AEh)

This parameter sets an ECLevel.



NOTE: This parameter applies to customers using a Firmware Flash Update per the Toshiba Global Commerce Solutions (TGCS) Universal Serial Bus OEM Point-of-Sale Device Interface. It allows defining an ECLevel value to manage and control Flash Update operations on the 4690 operating system.

Contact Zebra Support at zebra.com/support for more information.

To set an ECLevel value, scan **Set ECLevel**, and then scan five numeric barcodes in [Numeric Barcodes](#) that correspond to the desired level. Enter a leading zero for single digit numbers. To correct an error, or change a selection, scan [Cancel](#).



Set ECLevel

TGCS (IBM) USB Beep Directive

The host can send a beeper configuration request to the scanner. Scan Ignore Beep Directive to prevent the scanner from processing the host request. All directives are still acknowledged to the USB host as if they were processed.



Honor Beep Directive




*Ignore Beep Directive

TGCS (IBM) USB Barcode Configuration Directive

The host can enable and disable code types. Scan Ignore Barcode Configuration Directive to prevent the scanner from processing the host request. All directives are still acknowledged to the USB host as if they were processed.



Honor Barcode Configuration Directive



*Ignore Barcode Configuration Directive

IBM Scanner Generic Management Information

Parameter # 1940

Enable this parameter to retrieve generic scanner management information.



Enable IBM Scanner Generic Management Information (I)



*Disable IBM Scanner Generic Management Information (0)


IBM Scanner Vendor Specific Management Information

Parameter # 1941

Enable this parameter to return contests and format information determined by the scanner/scale manufacturer.



Enable IBM Scanner Vendor Specific Management Information (1)



*Disable IBM Scanner Vendor Specific Management Information (0)

TGCS (IBM) USB Direct I/O Beep

Parameter # 1360

The host can send a direct I/O beep request to the scanner. If you select Ignore Direct I/O Beep, the scanner does not beep when it receives this command. All directives are still acknowledged to the USB host as if they were processed.



*Honor Direct I/O Beep



Ignore Direct I/O Beep

USB Convert Unknown to Code 39

This option applies only to the IBM hand-held, IBM table-top, and OPOS devices. Select an option to enable or disable converting unknown barcode type data to Code 39.



Enable Convert Unknown to Code 39



*Disable Convert Unknown to Code 39

TGCS (IBM) USB Specification Version

Parameter # 45026

You can specify code types as unknown or with an appropriate IBM identifier.

Select IBM Specification Level (Original) to send the following code types as Unknown:

- Data Matrix
- GS1 Data Matrix
- QR Code
- GS1 QR
- MicroQR Code
- Aztec

Select IBM Specification Level Version 2.2 to send the code types with the appropriate IBM identifiers.



IBM Specification Level (Original)



*IBM Specification Level Version 2.2 or higher

USB IBM Long Direct I/O

Parameter # 1147

Use this option to enable or disable USB IBM Long Direct I/O.



*Disable (0)



Enable (1)

IBM Flash Update

Parameter # 1727

This parameter enables and disables IBM Flash update.



Enable IBM Flash Update (1)




*Disable IBM Flash Update (0)

USB Keystroke Delay

This parameter sets the delay, in milliseconds, between emulated keystrokes. Select a longer delay for hosts that require slower data transmission.



*No Delay



Medium Delay (20 msec)



Long Delay (40 msec)

USB Caps Lock Override

This option applies only to the USB HID Keyboard device. Select Override Caps Lock Key to preserve the case of the data regardless of the state of the Caps Lock key. This setting is always enabled for the Japanese Windows (ASCII) keyboard type and cannot be disabled.



Override Caps Lock Key (Enable)



*Do Not Override Caps Lock Key (Disable)

Keypad Emulation

Select Enable Keypad Emulation to send all characters as ASCII sequences over the numeric keypad. For example, ASCII A transmits as ALT make 0 6 5 ALT Break.



NOTE: If your keyboard type is not listed in the country code list (see [Country Codes](#)), disable [Quick Keypad Emulation](#) and enable Keypad Emulation.



*Enable Keypad Emulation



Disable Keypad Emulation

Keypad Emulation with Leading Zero

Select Enable Keypad Emulation with Leading Zero to send character sequences sent over the numeric keypad as ISO characters which have a leading zero. For example, ASCII A transmits as "ALT MAKE" 0 0 6 5 "ALT BREAK".



NOTE: This parameter only applies if [Emulate Keypad](#) is enabled.



*Enable Keypad Emulation with Leading Zero



Disable Keypad Emulation with Leading Zero

USB Function Key Mapping

ASCII values under 32 are normally sent as a control-key sequence. Select **Enable Function Key Mapping** to send the keys in bold instead of the standard key mapping. Table entries that do not have a bold equivalent remain the same regardless of whether you enable this parameter.



NOTE: See [ASCII Character Sets](#) for the ASCII character set information.



Enable Function Key Mapping



*Disable Function Key Mapping

USB Simulated Caps Lock

Select Enable Simulated Caps Lock to invert upper and lower case characters on the barcode as if the Caps Lock state is enabled on the keyboard. This inversion occurs regardless of the keyboard's Caps Lock state.



NOTE: Simulated Caps Lock applies to ASCII characters only. Do not enable this if [Caps Lock Override](#) is enabled.



Enable Simulated Caps Lock



*Disable Simulated Caps Lock

USB Convert Case

This parameter converts all barcode data to the selected case.



NOTE: Convert Case applies to ASCII characters only.



*No Case Conversion



Convert All to Upper Case



Convert All to Lower Case

USB Keyboard FN1 Substitution

This parameter applies to Code 128 and ISBT 128 for USB HID Keyboard devices. Scan Enable USB Keyboard FN1 Substitution to replace any FN1 character in a GS1 128 barcode with a user-selected Key Category and value.



Enable USB Keyboard FN1 Substitution



*Disable USB Keyboard FN1 Substitution

USB Polling Interval

This parameter defines the rate at which data is transmitted between the scanner and host computer (polling interval). A lower number indicates a faster data rate.



NOTE: When changing the USB polling interval, the scanner restarts and issues a power-up beep sequence.



IMPORTANT: Ensure the host supports the selected data rate.




1 msec



2 msec



*3 msec



4 msec



5 msec



6 msec



7 msec



8 msec



9 msec



10 msec

USB Quick Keypad Emulation

Enable Quick Keypad Emulation for a quick method of emulation using the numeric keypad where ASCII sequences are only sent for ASCII characters not found on the keyboard.



NOTE: Quick Keypad Emulation only applies to the USB HID Keyboard device when Keypad Emulation is enabled.



*Enable Quick Keypad Emulation




Disable Quick Keypad Emulation

USB Fast HID

Select Enable USB Fast HID to transmit USB HID data at a faster rate.



NOTE: Disable this option if transmission issues occur.



*Enable USB Fast HID



Disable USB Fast HID

Symbol Native API (SNAPI) Status Handshaking

After selecting a SNAPI interface as the USB device type, select an option to enable or disable status handshaking.



*Enable SNAPI Status Handshaking



Disable SNAPI Status Handshaking

CDC Beep on BEL

Parameter # 150

If you enable this parameter, the scanner issues a beep when it detects a BEL character in USB CDC communications. BEL indicates an illegal entry or other important event.



*Enable CDC Beep on BEL



Disable CDC Beep on BEL

USB CDC Host Variant

Parameter # 1713

When USB Device Type is set to USB CDC Host, the CDC Host Variant selects which type of CDC variant is used. The default USB CDC host variant is Standard CDC Host Mode.



*Standard USB CDC (0)



CDC SITA (1)



Travelsky (2)



NCR USB CDC (9)



NCR USB CDC Datalogic (10)

USB Static CDC

Parameter # 670

You can connect devices to the same COM port or different COM ports.

When disabled, each device connected consumes another COM port (first device = COM1, second device = COM2, third device = COM3, etc.)

When enabled, each device connects to the same COM port.



*Enable USB Static CDC (1)



Disable USB Static CDC (0)

RS-232 Interface

The scanner supports the RS-232 interface to connect to point-of-sale devices, host computers, or other devices with an available RS-232 port (for example, com port).

The scanner ships with the settings shown in [RS-232 Parameter Defaults](#). If the default values suit requirements, programming is not necessary. If your host does not appear in [RS-232 Host-Specific Code ID Characters](#), refer to the documentation for the host device to set communication parameters to match the host.

RS-232 Host-Specific Code ID Characters

RS-232 hosts have code ID characters that are transmitted automatically.

RS-232 hosts ICL, Fujitsu, Nixdorf Mode A or B, OPOS/JPOS, Olivetti, Omron, CUTE, NCR, or Datalogic transmit code ID characters. These characters are not programmable and are separate from the Transmit Code ID feature. Do not enable the Transmit Code ID feature for these hosts.

Table 8 RS-232 Host-Specific Code ID Characters

Code Type	ICL	Fujitsu	Wincor-Nixdorf Mode A	Wincor-Nixdorf Mode B/ OPOS/JPOS
UPC-A	A	A	A	A
UPC-E	E	E	C	C
EAN-8/JAN-8	FF	FF	B	B
EAN-13/JAN-13	F	F	A	A
Bookland EAN	F	F	A	A
Code 128	L <len>	None	K	K
GS1-128	L <len>	None	P	P
Code 39	C <len>	None	M	M
Code 39 Full ASCII	None	None	M	M
Code 32	None	None	None	None
Code 93	None	None	L	L
I 2 of 5	I <len>	None	I	I
D 2 of 5	H <len>	None	H	H

Table 8 RS-232 Host-Specific Code ID Characters (Continued)

Code Type	ICL	Fujitsu	Wincor-Nixdorf Mode A	Wincor-Nixdorf Mode B/ OPOS/JPOS
IATA	H<len>	None	H	H
Codabar	N <len>	None	N	N
MSI	None	None	O	O
GS1 DataBar Variants	None	None	E	E
PDF417	None	None	Q	Q
MicroPDF417	None	None	S	S
Data Matrix	None	None	R	R
GS1 Data Matrix	None	None	W	W
Maxicode	None	None	T	T
QR Code	None	None	U	U
GS1 QR	None	None	X	X
Aztec/Aztec Rune	None	None	V	V

Table 9 RS-232 Host-Specific Code ID Characters

Code Type	Olivetti	Omron	CUTE	NCR	Datalogic
UPC-A	A	A	A	A	A
UPC-E	C	E	None	E	E
EAN-8/JAN-8	B	FF	None	FF	FF
EAN-13/JAN-13	A	F	A	F	F
Code 128	K <len>	L <len>	5	B3	#
Code 39	M <len>	C <len>	3	B1	*
Code 39 Full ASCII	None	None	3	None	None
I 2 of 5	I <len>	I <len>	1	B2	i
D 2 of 5	H <len>	H <len>	2	None	None
IATA	H<len>	H<len>	2	None	IA
Codabar	N <len>	N <len>	None	N	%
MSI	O <len>	None	None	None	@
GS1 DataBar Variants	None	None	None	Je0	DataBar-R4 DataBar Limited: RL DataBar Expanded: RX

RS-232 Parameter Defaults

Table 10 Parameter Default Table

Parameter	Parameter Default
RS-232 Host Types	Standard
RS-232 Baud Rate	9600
RS-232 Parity	None
Check Receive Errors	Enable
RS-232 Stop Bits	One stop bit
RS-232 Data Bits	Eight bits
Hardware Handshaking	None
Software Handshaking	None
RS-232 Barcodes with Unknown Characters	Send
RS-232 Host Serial Response Timeout	2 seconds
RTS Line State	Low
Beep on BEL	Disable
Intercharacter Delay	0 msec
Datalogic Host Format	Enable
Datalogic Supported Commands	Disable
Nixdorf Beep/LED Options	Normal operation
NCR	
NCR Prefix	N/A
NCR Use Prefix	Enable
NCR Use Block Check Character (BBC)	Enable
NCR Prefix	1002
NCR Suffix	1003
NCR 2-D Label ID Mode	NCR Mode

RS-232 Host Types

Select an RS-232 host interface using one of the following options.

Notes on using RS-232 host types:

- For a list of supported scanner functionality by communication protocol, see [Communication Protocol Functionality](#).
- Scanning Standard RS-232 activates the RS-232 driver, but does not change port settings (for example, parity, data bits, handshaking). To modify port settings, scan a barcode for a different RS-232 host type.

- The CUTE host disables all parameter scanning, including Set Defaults. If you inadvertently select CUTE, scan [Enable Parameter Barcode Scanning](#), and then change the host selection.



*Standard RS-232



ICL RS-232



Nixdorf RS-232 Mode A



Nixdorf RS-232 Mode B



Olivetti ORS4500



Omron




OPOS/JPOS



Fujitsu RS-232



CUTE



NCR



Datalogic Variant


RS-232 Baud Rate

The RS-232 baud rate is the number of bits of data transmitted per second.

Select an option to set the scanner's baud rate to match the baud rate setting of the host device. Otherwise, data may not reach the host device or may reach it in distorted form.



*Baud Rate 9600



Baud Rate 19,200



Baud Rate 38,400



Baud Rate 57,600




Baud Rate 115,200



Baud Rate 230,400



Baud Rate 460,800



Baud Rate 921,600

RS-232 Parity

A parity check bit is the most significant bit of each ASCII coded character. Choose an option to select the parity type according to host device requirements.

- Odd - This sets the parity bit value to 0 or 1, based on data, to ensure that the coded character contains an odd number of 1 bits.
- Even - This sets the parity bit value to 0 or 1, based on data, to ensure that the coded character contains an even number of 1 bits.
- None - No parity bit is required.



Odd



Even



*None

Check Receive Errors


This parameter determines whether to check the parity, framing, and overrun of received characters.



NOTE: The parity value of received characters is verified against the value set for [Parity](#).



*Check For Received Errors




Do Not Check For Received Errors

RS-232 Stop Bits

This parameter sets the number of stop bits at the end of each transmitted character marks the end of transmission of one character and prepares the receiving device for the next character in the serial data stream. Select an option to set the number of stop bits (one or two) based on the number the receiving host can accommodate.



*1 Stop Bit



2 Stop Bits

Data Bits

This parameter allows the scanner to interface with auxiliary scanners requiring a 7-bit or 8-bit ASCII protocol.



7 Data Bits



*8 Data Bits

Hardware Handshaking

The data interface consists of an RS-232 port designed to operate either with or without the hardware handshaking lines Request to Send (RTS) and Clear to Send (CTS).

If hardware handshaking and software handshaking are both enabled, hardware handshaking takes precedence.



NOTE: The DTR signal is jumpered to the active state.

You can choose one of the following options:

None

This disables hardware handshaking and transmits scan data as it becomes available.

Standard RTS/CTS

This sets standard RTS/CTS hardware handshaking and transmits scanned data. The scanner reads the CTS line for activity according to the following sequence:

- If the CTS line is de-asserted, the scanner asserts the RTS line and waits up to [Host Serial Response Timeout](#) for the host to assert CTS, and then transmits data when asserted. If, after the timeout, the CTS line is not asserted, the scanner sounds a transmit error and discards the data.
- If CTS is asserted, the scanner waits up to [Host Serial Response Timeout](#) for the host to de-assert CTS. If the CTS line is still asserted after the timeout, the scanner sounds a transmit error tone and discards the scanned data.
- The scanner de-asserts RTS after sending the last character of data.
- The host negates CTS. The scanner checks for a de-asserted CTS upon the next data transmission.



NOTE: During data transmission, if CTS is deasserted for more than 50 ms between characters, the scanner sounds a transmit error and discards the data. The data must be re-scanned.

RTS/CTS Option 1

The scanner asserts RTS before transmitting data and ignores the state of CTS. The scanner de-asserts RTS when transmission completes.

RTS/CTS Option 2

RTS is always high or low (user-programmed logic level). However, the scanner waits for the host to assert CTS before transmitting data. If CTS is not asserted within the [Host Serial Response Timeout](#), the scanner sounds a transmit error and discards the data. During data transmission, if CTS is deasserted for more than 50 ms between characters, the scanner sounds a transmit error and discards the data.

RTS/CTS Option 3

This option transmits the scanned data according to the following sequence:


- The scanner asserts RTS before data transmission, regardless of the state of CTS.
- The scanner waits up to the [Host Serial Response Timeout](#) for the host to assert CTS, and then transmits data when asserted. If, after the timeout, the CTS line is not asserted, the scanner sounds a transmit error and discards the data.
- The scanner de-asserts RTS after sending the last character of data.
- The host negates CTS. The scanner checks for a de-asserted CTS upon the next data transmission.



NOTE: During data transmission, if CTS is deasserted for more than 50 ms between characters, the scanner sounds a transmit error and discards the data. The data must be re-scanned.



*None



Standard RTS/CTS



RTS/CTS Option 1



RTS/CTS Option 2



RTS/CTS Option 3

Software Handshaking

This parameter offers control of data transmission in addition to, or instead of, that offered by hardware handshaking. If software handshaking and hardware handshaking are both enabled, hardware handshaking takes precedence.

- None - This transmits data immediately. The scanner expects no response from the host.
- ACK/NAK - After transmitting data, the scanner waits for an ACK or NAK response from the host. If it receives a NAK, the scanner transmits the data again and waits for an ACK or NAK. After three unsuccessful attempts to send data after receiving NAKs, the scanner sounds a transmit error and discards the data. The scanner waits up to the programmable [Host Serial Response Timeout](#) to receive an ACK or NAK. If the scanner does not get a response in this time, it sounds a transmit error and discards the data. There are no reattempts.
- ENQ - The scanner waits for an ENQ character from the host before transmitting data. If it does not receive an ENQ within the [Host Serial Response Timeout](#), the scanner sounds a transmit error and discards the data. The host must transmit an ENQ character at least every [Host Serial Response Timeout](#) to prevent transmission errors.
- ACK/NAK with ENQ - This combines the two previous options. An additional ENQ is not required to re-transmit data due to a NAK from the host.
- XON/XOFF - An XOFF character stops data transmission until the scanner receives an XON character. There are two situations for XON/XOFF:
 - The scanner receives an XOFF before it has data to send. When the scanner has data, it waits up to the [Host Serial Response Timeout](#) for an XON character before transmitting. If it does not receive the XON within this time, the scanner sounds a transmit error and discards the data.
 - The scanner receives an XOFF during data transmission and stops transmission after sending the current byte. When the scanner receives an XON character, it sends the rest of the data. The scanner waits indefinitely for the XON.




*None



ACK/NAK



ENQ



ACK/NAK with ENQ



XON/XOFF

RS-232 Barcodes with Unknown Characters

This parameter defines how the scanner handles barcodes containing unknown characters (characters the host cannot recognize). Select Send Barcodes With Unknown Characters to send all barcode data except for unknown characters. The scanner does not issue error beeps.

Select Do Not Send Barcodes With Unknown Characters to send barcode data up to the first unknown character. The scanner issues an error beep.



*Send Barcodes With Unknown Characters



Do Not Send Barcodes With Unknown Characters

RS-232 Host Serial Response Timeout

This parameter specifies how long the scanner waits for an ACK, NAK, or CTS before determining that a transmission error occurred. This parameter applies only on one of the ACK/NAK software handshaking modes, or RTS/CTS hardware handshaking mode.



*Minimum: 2 Seconds



Low: 2.5 Seconds



Medium: 5 Seconds



High: 7.5 Seconds



Maximum: 9.9 Seconds

RTS Line State

This parameter sets the idle state of the serial host RTS line to Low RTS or High RTS.



*Host: Low RTS



Host: High RTS

Beep on <BEL>

This parameter sets whether the scanner issues a beep when it detects a <BEL> character on the RS-232 serial line. <BEL> indicates an illegal entry or another important event.



Beep On <BEL> Character (Enable)




*Do Not Beep On <BEL> Character (Disable)

Intercharacter Delay

This parameter specifies the intercharacter delay inserted between character transmissions.



*Minimum: 0 msec



Low: 25 msec



Medium: 50 msec



High: 75 msec



Maximum: 99 msec

Datalogic Host Format

Parameter # 2253 (SSI # F8 08 CD)

When this parameter is enabled, the Datalogic host variant appends a code ID and a suffix value (CR) to the decoded data. When this parameter is disabled, only the decoded data is transmitted. These commands are supported over RS232 or USB CDC.



*Enable (1)



Disable (0)

Datalogic Supported Commands

Parameter # 2260 (SSI # F8 08 D4)

This parameter allows serial scan to enable or disable commands for a standard RS232 host.

- 'E' or 'e' = Enable Scanning
- 'D' or 'd' = Disable Scanning
- 'R' = Reset the scanner
- 'F' = Indicate to the scanner that Datalogic is not on file
- 'B' = Issue a good read beep
- 1 (Not an ASCII Character – This is a decimal number 1) = Force a good read beep
- 7 (Not an ASCII Character – This is a decimal number 7) = Force a good read beep



Enable (1)



*Disable (0)

Nixdorf Beep/LED Options

Parameter # 45062 SSI = F8h B0h 06h

If you select Nixdorf Mode B, this parameter determines when the scanner beeps and activates its LED after a decode.



*Normal Operation (Beep/LED Immediately After Decode)



Beep/LED After Transmission



Beep/LED After CTS Pulse

NCR Use Prefix


Parameter # 1238

This parameter enables or disables using the prefix for NCR data.

If you selected NCR from [RS-232 Host Types](#), use this parameter to enable or disable using the prefix for all communications.



*Enable NCR Use Prefix (1)



Disable NCR Use Prefix (0)

NCR Use Block Check Character (BCC)

Parameter # 1239

You can enable Block Check Character if you enabled NCR.

If you selected NCR from , use this parameter to enable or disable using the Block Check Character (after the Terminator byte) for all communications.



*Enable NCR Use BCC (1)



Disable NCR Use BCC (0)

NCR Prefix

Parameter # 1282

When NCR is enabled, use this parameter to define the prefix character.

If you selected NCR from and enabled [NCR Use Prefix](#), set the prefix character to use for all communications.

To do this, scan the following barcode, and then scan four barcodes from [Numeric Barcodes](#) that correspond to the desired character in [NCR Use Prefix](#). The default value is 1002 (STX).



NCR Prefix

NCR Suffix

Parameter # 1283

Use this parameter to set the suffix (terminator) character for all communications when NCR is enabled.

If you selected NCR from , set the suffix (terminator) character to use for all communications.

To do this, scan the following barcode, and then scan four barcodes from [Numeric Barcodes](#) that correspond to the desired character in [ASCII Character Sets](#). The default is 1003 (ETX).



NCR Suffix

NCR 2D Label-ID Mode


Parameter # 1948

This parameter selects an NCR 2D Label-ID mode for the defined bar code prefix type.

- NCR Mode - Adds an NCR prefix to a bar code. This is the default.
- Legacy Mode - Adds an non-NCR prefix to a bar code.
- Suppress Mode - No prefix is added to a bar code.



* NCR Mode (0)



Legacy Mode (1)



Suppress Mode (2)

SSI Interface

This section describes the system requirements of the Simple Serial Interface (SSI), which provides a communications link between Zebra decoders (e.g., scan engines, slot scanners, hand-held scanners, two-dimensional scanners, hands-free scanners, and RF base stations) and a serial host. It provides the means for the host to control the decoder or scanner.

Communication

All communication between the scanner and host occurs over the hardware interface lines using the SSI protocol. Refer to the Simple Serial Interface Programmer's Guide, p/n 72E-40451-xx, for more information on SSI.

The host and the scanner exchange messages in packets. A packet is a collection of bytes framed by the proper SSI protocol formatting bytes. The maximum number of bytes per packet that the SSI protocol allows for any transaction is 257 (255 bytes + 2 byte checksum).

Depending on the configuration, the scanner can send decode data as ASCII data (unpacked), or as part of a larger message (packeted).

SSI performs the following functions for the host device:

- Maintains a bi-directional interface with the scanner
- Allows the host to send commands that control the scanner
- Passes data from the scanner to a host device in SSI packet format or straight decode message.

The SSI environment consists of a scanner, a serial cable which attaches to the host device, and if required, a power supply.

SSI transmits all decode data including special formatting (for example, AIM ID). Parameter settings can control the format of the transmitted data.

The scanner can also send parameter information, product identification information, or event codes to the host.

All commands sent between the scanner and host must use the format described in the SSI Message Formats section. [SSI Transactions](#) describes the required sequence of messages in specific cases.

SSI Commands

The following table lists all the SSI opcodes the scanner supports. The host transmits opcodes designated type H. The scanner (decoder) transmits type D opcodes and transmits Host/Decoder (H/D) types.

Table 11 SSI Commands

Name	Type	Opcode	Description
BEEP	H	0xE6	Sound the beeper.
CAPABILITIES_REPLY	D	0xD4	Reply to CAPABILITIES_REQUEST; contains a list of the capabilities and commands the decoder supports.
CAPABILITIES_REQUEST	H	0xD3	Request capabilities report from the decoder.
CMD_ACK	H/D	0xD0	Positive acknowledgment of received packet.
CMD_NAK	H/D	0xD1	Negative acknowledgment of received packet.
DECODE_DATA	D	0xF3	Decode data in SSI packet format.
EVENT	D	0xF6	Event indicated by associated event code.
LED_OFF	H	0xE8	De-activate LED output.
LED_ON	H	0xE7	Activate LED output.
PARAM_DEFAULTS	H	0xC8	Set parameter default values.
PARAM_REQUEST	H	0xC7	Request values of certain parameters.
PARAM_SEND	H/D	0xC6	Send parameter values.
REPLY_REVISION	D	0xA4	Reply to REQUEST_REVISION, contains the decoder's software/hardware configuration.
REQUEST_REVISION	H	0xA3	Request the decoder's configuration.
SCAN_DISABLE	H	0xEA	Prevent the operator from scanning barcodes.
SCAN_ENABLE	H	0xE9	Permit barcode scanning.
SLEEP	H	0xEB	Request to place the decoder into low power.
START_DECODE	H	0xE4	Tell the decoder to attempt to decode a barcode.
STOP_DECODE	H	0xE5	Tell the decoder to abort a decode attempt.
WAKEUP	H	N/A	Wake the decoder from low power mode.

For details of the SSI protocol, refer to the Simple Serial Interface Programmer's Guide.

SSI Transactions

General Data Transactions

This section describes general data transactions between the scanner and a host.

ACK/NAK Handshaking

If you enable ACK/NAK handshaking (the default), all packeted messages must have a CMD_ACK or CMD_NAK response, unless the command description states otherwise. Zebra recommends leaving this handshaking enabled to provide feedback to the host. Raw decode data and WAKEUP do not use ACK/NAK handshaking since they are not packeted data.

Following is an example of a problem which can occur if you disable ACK/NAK handshaking:

- The host sends a PARAM_SEND message to the scanner to change the baud rate from 9600 to 19200.
- The scanner cannot interpret the message.
- The scanner does not implement the change the host requested.
- The host assumes that the parameter change occurred and acts accordingly.
- Communication is lost because the change did not occur on both sides.

If you enable ACK/NAK handshaking, the following occurs:

- The host sends a PARAM_SEND message.
- The scanner cannot interpret the message.
- The scanner CMD_NAKs the message.
- The host resends the message.
- The scanner receives the message successfully, responds with CMD_ACK, and implements parameter changes.

Decoded Data Transmission


The [Decode Data Packet Format](#) parameter controls how decode data is sent to the host. Set this parameter to send the data in a DECODE_DATA packet. Clear this parameter to transmit the data as raw ASCII data.



NOTE: When transmitting decode data as raw ASCII data, ACK/NAK handshaking does not apply regardless of the state of the ACK/NAK handshaking parameter.


ACK/NAK Enabled and Packeted Data

The scanner sends a DECODE_DATA message after a successful decode. The scanner waits for a programmable timeout for a CMD_ACK response. If it does not receive the response, the scanner tries to send two more times before issuing a host transmission error. If the scanner receives a CMD_NAK from the host, it may attempt a retry depending on the cause field of the CMD_NAK message.

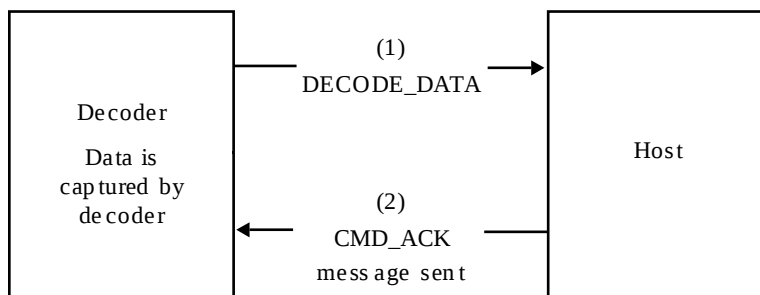


ACK/NAK Enabled and Unpacketed ASCII Data

Even if ACK/NAK handshaking is enabled, no handshaking occurs because handshaking applies only to packeted data. In this example the packeted_decode parameter is disabled.

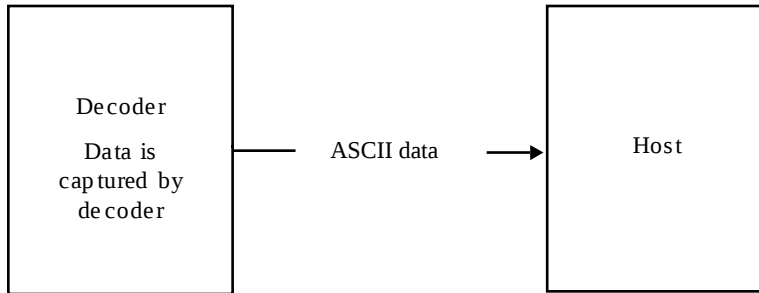


ACK/NAK Disabled and Packeted DECODE_DATA

In this example ACK/NAK does not occur even though packeted_decode is enabled because the ACK/NAK handshaking parameter is disabled.

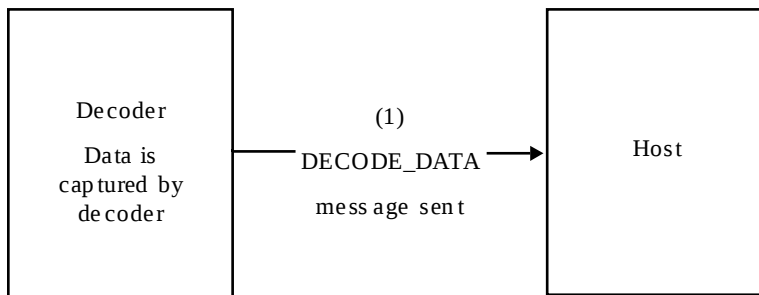

ACK/NAK Disabled and Unpacketed ASCII Data

The decoder sends captured data to the host.

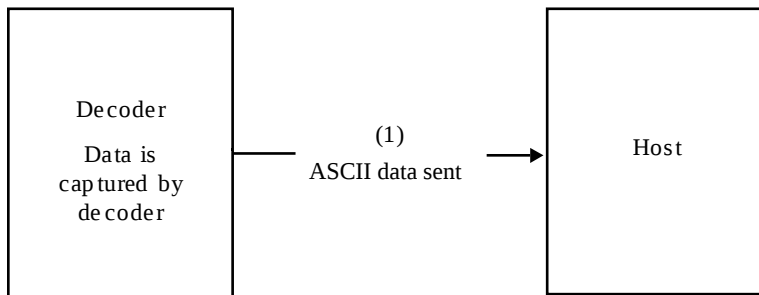

Communication Summary

RTS/CTS Lines

All communication must use RTS/CTS handshaking as described in the Simple Serial Interface Programmer's Guide, p/n 72E-40451-xx. If bypassing hardware handshaking, the host must send the WAKEUP command before all other communication or the first byte of a message can be lost during the scanner wakeup sequence. Zebra recommends not bypassing RTS/CTS hardware handshaking.

ACK/NAK Option

ACK/NAK handshaking is enabled by default and Zebra recommends leaving it enabled. Disabling this can cause communication problems, as handshaking is the only acknowledgment that a message was received correctly. ACK/NAK is not used with unpacked decode data regardless of whether it is enabled.

Number of Data Bits

All communication with the scanner must use 8-bit data.

Serial Response Timeout

The [Host Serial Response Timeout](#) parameter determines how long to wait for a handshaking response before trying again or aborting further attempts. Set the same value for both the host and scanner.



NOTE: You can temporarily change the [Host Serial Response Timeout](#) when the host takes longer to process an ACK or longer data string. Zebra does not recommend frequent permanent changes due to limited write cycles of non-volatile memory.

Retries

The host resends data twice after the initial send if the scanner does not respond with an ACK or NAK (if ACK/NAK handshaking is enabled), or response data (for example, PARAM_SEND, REPLY_REVISION). If the scanner replies with a NAK RESEND, the host resends the data. All resent messages must have the resend bit set in the Status byte.

The scanner resends data two times after the initial send if the host fails to reply with an ACK or NAK (if ACK/NAK handshaking is enabled).

Baud Rate, Stop Bits, Parity, Response Timeout, ACK/NAK Handshaking

If you use PARAM_SEND to change these serial parameters, the ACK response to the PARAM_SEND uses the previous values for these parameters. The new values then take effect for the next transaction.

Errors

When the scanner encounters a communication error, it emits an error beep.

The scanner issues a communication error when:

- The CTS line is asserted when the scanner tries to transmit, and is still asserted on each of two successive retries
- The scanner does not receive an ACK or NAK after initial transmit and two resends.

SSI Communication Notes

Follow these best practices for SSI communication.

- When not using hardware handshaking, space messages sufficiently apart. The host must not communicate with the scanner if the scanner is transmitting.

- When using hardware handshaking, frame each message properly with handshaking signals. Do not try to send two commands within the same handshaking frame.
- There is a permanent/temporary bit in the PARAM_SEND message. Removing power from the scanner discards temporary changes. Permanent changes are written to non-volatile memory. Frequent changes shorten the life of the non-volatile memory.

Encapsulation of RSM Commands/Responses over SSI

The SSI protocol allows the host to send a command that is variable in length up to 255 bytes. Although there is a provision in the protocol to multi-packet commands from the host, the scanner does not support this. The host must fragment packets using the provisions in the RSM protocol.

Command Structure

Byte	7	6	5	4	3	2	1	0
0	Length (not including the checksum)							
1	SSI_MGMT_COMMAND (0x80)							
2	Message Source (4 - Host)							
3	Reserved (0)			Reserved (0)		Reserved (0)	Cont'd packet	Retransmit
4	Payload data (see the following example)							
...								
Length -1								
Length	2's complement checksum (MSB)							
Length +1	2's complement checksum (LSB)							

The expected positive response is SSI_MGMT_COMMAND which can be a multi-packet response. Devices that do not support this command respond with the standard SSI_NAK.

Response Structure

Byte	7	6	5	4	3	2	1	0
0	Length (not including the checksum)							
1	SSI_MGMT_COMMAND (0x80)							
2	Message Source (0 - Decoder)							
3	Reserved (0)			Reserved (0)		Reserved (0)	Cont'd packet	Retransmit
4	Payload data (see the following example)							
...								
Length -1								
Length	2's complement checksum (MSB)							
Length +1	2's complement checksum (LSB)							

Example Transaction

The following example illustrates how to retrieve diagnostic information (Diagnostic Testing and Reporting - Attribute #10061- decimal) from the scanner using encapsulation of RSM commands over SSI. Before sending an RSM command, the host must send the RSM Get Packet Size command to query the packet size supported by the device.

Command from Host to Query Packet Size Supported by Device

```
0A 80 04 00 00 06 20 00 FF FF FD 4E
```

Where:

- 0A 80 04 00 is encapsulation of RSM commands over SSI command header
- 00 06 20 00 FF FF is RSM Get Packet Size command
- FD 4E is SSI command checksum

Response from Device with Packet Size Information

```
0C 80 00 00 00 08 20 00 00 F0 00 F0 FD 6C
```

Where:

- 0C 80 00 00 is encapsulation of RSM command over SSI command header
- 00 08 20 00 00 F0 00 F0 is RSM Get Packet Size response
- FD 6C is SSI response checksum

Command from Host to Retrieve Diagnostic Information

```
0C 80 04 00 00 08 02 00 27 4D 42 00 FE B0
```

Where:

- 0C 80 04 00 is encapsulation of RSM commands over SSI command header
- 00 08 02 00 27 4D 42 00 is attribute Get command requesting attribute 10061 decimal
- FE B0 is SSI command checksum

Response from Device with Diagnostic Information

```
21 80 00 00 00 1D 02 00 27 4D 41 01 42 00 0E 00 00 00 00 01 03 02 03 03 04
03 05 03 06 03 FF FF FC 15
```

Where:

- 21 80 00 00 00 1D 02 00 27 4D 41 01 42 00 0E 00 00 is encapsulation of RSM responses over SSI command header
- 00 00 01 03 02 03 03 04 03 05 03 06 03 is attribute Get response which includes diagnostic report value
- FF FF is attribute Get response, packet termination

- FC 15 is SSI response checksum

Setting SSI Parameters

You can set up a scanner with an SSI host. When using SSI, program the scanner via barcode menu or SSI hosts commands

The scanner ships with the settings shown in [SSI Interface Defaults](#). If the default values suit requirements, programming is not necessary.

To set feature values, scan a single barcode or a short barcode sequence. The settings are stored in non-volatile memory and are preserved even when the scanner powers down.

To return all features to default values, scan [Set Factory Defaults](#). Throughout the programming barcode menus, asterisks (*) indicate default values.

SSI Scanning Sequence Examples

In most cases scanning one barcode sets the parameter value. For example, to set the baud rate to 19,200, scan the **Baud Rate 19,200** barcode under [Baud Rate](#). The scanner issues a fast warble beep and the LED turns green, signifying a successful parameter entry.

Other parameters require scanning several barcodes. See the parameter descriptions for this procedure.

SSI Errors While Scanning

Unless otherwise specified, to correct an error during a scanning sequence, just re-scan the correct parameter.

SSI Interface Parameter Defaults

The following table lists defaults for SSI host parameters.

You can change these values in one of two ways:

- Scan the appropriate barcodes in this section. The new value replaces the standard default value in memory. To recall default parameter values, see [Default Parameters](#).
- Download data through the device's serial port using SSI. Hexadecimal parameter numbers appear in this chapter below the parameter title, and option values appear in parenthesis beneath the accompanying barcodes. Refer to the Simple Serial Interface (SSI) Programmer's Guide for detailed instructions for changing parameters using this method.

Table 12 SSI Interface Default Table

Parameter	Parameter Number	SSI Number	Default
SSI Host Parameters			
Select SSI Host	N/A	N/A	N/A
Baud Rate	156	9Ch	9600
Parity	158	9Eh	None
Check Parity	151	97h	Disable

Table 12 SSI Interface Default Table (Continued)

Parameter	Parameter Number	SSI Number	Default
Stop Bits	157	9Dh	1
Software Handshaking	159	9Fh	Enable ACK/NAK
Host RTS Line State	154	9Ah	Low
Decode Data Packet Format	238	EEh	Send Raw Decode Data
Host Serial Response Timeout	155	9Bh	2 Seconds
Host Character Timeout	239	EFh	200 msec
Multipacket Option	334	F0h 4Eh	Multipacket Option 1
Interpacket Delay	335	F0h 4Fh	0 msec
Event Reporting			
Decode Event	256	F0h 00h	Disable
Boot Up Event	258	F0h 02h	Disable
Parameter Event	259	F0h 03h	Disable



NOTE: SSI interprets Prefix, Suffix1, and Suffix2 values listed in [ASCII Character Sets](#) differently than other interfaces. SSI does not recognize key categories, only the 3-digit decimal value. The default value of 7013 is interpreted as CR only.

SSI Host Parameters

Scan barcodes to set SSI host parameters

Select SSI Host

Use this parameter to select SSI as the host interface.



SSI Host

SSI Baud Rate


Parameter # 156 (SSI # 9Ch)

The baud rate defines the number of bits of data transmitted per second.

Select an option to set the scanner's baud rate to match the host device's baud rate setting . If the baud rates do not match, data may not reach the host device or may reach distorted form.



*Baud Rate 9600 (0)



Baud Rate 19,200 (7)



Baud Rate 38,400 (8)



Baud Rate 57,600 (9)



Baud Rate 115,200 (10)



Baud Rate 230,400 (11)



Baud Rate 460,800 (12)



Baud Rate 921,600 (13)

SSI Parity

Parameter # 158 (SSI # 9Eh)

Choose whether code characters contain an odd or even number of 1 bits, or choose that no parity bit is required.

A parity check bit is the most significant bit of each ASCII-coded character. This parameter selects the parity type according to host device requirements.

- Odd - This sets the parity bit value to 0 or 1, based on data, to ensure that the coded character contains an odd number of 1 bits.
- Even - This sets the parity bit value to 0 or 1, based on data, to ensure that the coded character contains an even number of 1 bits.
- None - No parity bit is required.



Odd (2)



Even (1)



*None (0)

Check Parity

Parameter # 151 (SSI # 97h)

Use this parameter to enable or disable parity checks for received characters.

See [SSI Parity](#) to select the type of parity.



*Do Not Check Parity (0)



Check Parity (1)

SSI Stop Bits

Parameter # 157 (SSI # 9Dh)

The stop bit(s) at the end of each transmitted character marks the end of transmission of one character and prepares the receiving device for the next character in the serial data stream.

Select an option to set the number of stop bits (one or two) based on the number the receiving host can accommodate.



*1 Stop Bit (1)



2 Stop Bits (2)

Software Handshaking

Parameter # 159 (SSI # 9Fh)

This parameter controls data transmission in addition to control hardware handshaking offers. Hardware handshaking is always enabled; you cannot disable it.

- Disable ACK/NAK Handshaking - The scanner neither generates nor expects ACK/NAK handshaking packets.
- Enable ACK/NAK Handshaking - After transmitting data, the scanner expects either an ACK or NAK response from the host. The scanner also receives ACKs or NAKs messages from the host. The scanner waits up to the programmable [Host Serial Response Timeout](#) to receive an ACK or NAK. If the scanner does not get a response within the time period, it resends its data up to two times before discarding the data and declaring a transmission error.



Disable ACK/NAK (0)



*Enable ACK/NAK (1)

Host RTS Line State

Parameter # 154 (SSI # 9Ah)

This parameter sets the expected idle state of the Serial Host RTS line.

The SSI interface is designed for host applications that implement the SSI protocol. However, you can use the scanner in a "scan-and-transmit" mode to communicate with any standard serial communication software on a host PC (see [Decode Data Packet Format](#)). If transmission errors occur

in this mode, the host PC may assert hardware handshaking lines that interfere with the SSI protocol. Select High barcode to address this problem.



*Low (0)



High (1)

Decode Data Packet Format

Parameter # 238 (SSI # EEh)

This parameter selects whether to transmit decoded data in raw format (unpacked), or in the packet format defined by the serial protocol.



NOTE: Selecting the raw format disables ACK/NAK handshaking for decode data.



*Send Raw Decode Data (0)



Send Packeted Decode Data (1)

Host Serial Response Timeout (SSI)


Parameter # 155 (SSI # 9Bh)

This parameter specifies how long a scanner waits for an ACK or NAK before resending.

If the scanner is ready to send, and the host has already been granted permission to send, the scanner waits for the designated timeout before declaring an error.



NOTE: Other values are available via SSI command.




*Low - 2 Seconds (20)



Medium - 5 Seconds (50)



High - 7.5 Seconds (75)



Maximum - 9.9 Seconds (99)

Host Character Timeout

Parameter # 239 (SSI # EFh)

This parameter specifies the maximum time a scanner waits between characters transmitted by the host before discarding the received data and declaring an error.


Select an option to specify the maximum time the scanner waits from Low to High.



NOTE: Additional values are available in the SSI command parameter.



*Low - 200 msec (20)



Medium - 500 msec (50)



High - 750 msec (75)



Maximum - 990 msec (99)

Multipacket Option

Parameter # 334 (SSI # F0h 4Eh)

This parameter controls ACK/NAK handshaking for multi-packet transmissions.

- Multi-Packet Option 1 - The host sends an ACK/NAK for each data packet during a multi-packet transmission.
- Multi-Packet Option 2 - The scanner sends data packets continuously, without using ACK/NAK handshaking to pace the transmission. If overrun, the host can use hardware. handshaking to temporarily delay scanner transmissions. At the end of transmission, the scanner waits for a CMD_ACK or CMD_NAK.
- Multi-Packet Option 3 - It operates like Option 2 but adds a programmable interpacket delay. See [Interpacket Delay](#) to set this delay.



*Multipacket Option 1 (0)



Multipacket Option 2 (1)



Multipacket Option 3 (2)

Interpacket Delay

Parameter # 335 (SSI # F0h 4Fh)

This parameter specifies the interpacket delay if you select Multipacket Option 3.



NOTE: Additional values are available via SSI command.



*Minimum - 0 msec (0)



Low - 25 msec (25)



Medium - 50 msec (50)



High - 75 msec (75)



Maximum - 99 msec (99)

Event Reporting

The host can request the scanner to provide certain information (events) relative to scanner behavior. Scan the following barcodes to enable or disable events.

Table 13 Event Codes

Event Class	Event	Code Reported
Decode Event	Non-parameter decode	0x01
Boot Up Event	System power-up	0x03
Parameter Event	Parameter entry error	0x07
	Parameter stored	0x08
	Defaults set (and parameter event is enabled by default)	0x0A
	Number expected	0x0F

Decode Event

Parameter # 256 (SSI # F0h 00h)

This parameter enables or disables the scanner to decode a non-parameter decode event.

- Enable Decode Event - scanner generates a message to the host upon a successful barcode decode.
- Disable Decode Event - no notification is sent.



Enable Decode Event (1)



*Disable Decode Event (0)

Boot Up Event

Parameter # 258 (SSI # F0h 02h)

This parameter enables or disables the scanner to decode a system power-up event.

- Enable Boot Up Event - scanner generates a message to the host whenever power is applied.
- Disable Boot Up Event - no notification is sent.



Enable Boot Up Event (1)



*Disable Boot Up Event (0)

Parameter Event

Parameter # 259 (SSI # F0h 03h)

This parameter enables or disables the scanner to decode parameter events.

- Enable Parameter Event - scanner generates a message to the host when one of the events specified in [Event Reporting](#) occurs.
- Disable Parameter Event - no notification is sent.



Enable Parameter Event (1)



*Disable Parameter Event (0)

User Preferences and Miscellaneous Options

You can program the scanner to perform various functions or activate different features. This section describes user preference features and provides programming barcodes for selecting these features.

The scanner ships with the settings shown in [User Preferences Parameter Defaults](#). If the default values suit requirements, programming is not necessary.

Setting User Preference Parameters

To set feature values, scan a single barcode or a short barcode sequence. The settings are stored in non-volatile memory and are preserved even when the scanner powers down.



NOTE: Most computer monitors allow scanning barcodes directly on the screen. When scanning from the screen, be sure to set the document magnification to a level where you can see the barcode clearly, and bars and/or spaces do not merge.

If not using the default host, select the host type (see each host section for specific host information) after the power-up beeps sound. This is only necessary upon the first power-up when connected to a new host.

To return all features to default values, see [Default Parameters](#). Throughout the programming barcode menus, asterisks indicate (*) default values.

User Preference Scanning Sequence Examples

In most cases, scanning one barcode sets the parameter value.

Other parameters require scanning several barcodes. Relevant parameters contain descriptions for this procedure.

User Preference Errors While Scanning

Unless otherwise specified, to correct an error during a scanning sequence, re-scan the correct parameter.

User Preferences Parameter Defaults

This table provides a list of the User Preference parameter default values. To change the device's behavior, scan the relevant barcodes in this section.

Table 14 User Preferences Parameter Defaults

Parameter	Parameter Number	SSI Number	Default
Parameter Barcode Scanning	236	ECh	Enable
Lock/Unlock Parameter Scanning	802	F2h 22h	0000
Beep After Good Decode	56	38h	Beep
Beeper Volume	140	8Ch	High
Beeper Tone	145	91h	Medium
Beeper Duration	628	F1h 74h	Medium
Suppress Power Up Beeps	721	F1h D1h	Do Not Suppress Power-Up Beeps
LED on Good Decode	744	F1h E8h	Enable LED on Good Decode
Indicator LED Brightness	1317	F8h 05h 25h	High brightness
Hand-Held Trigger Mode	138	8Ah	Blinking
Decode Session Timeout	136	88h	99
Hands-Free Decode Session Timeout	400	F0h 90h	15
Timeout Between Decodes, Same Symbol	137	89h	5
Timeout Between Decodes, Different Symbols	144	90h	1
Mobile Phone / Display Mode (Enhanced)	716	F1h CCh	Normal Mobile Phone/ Display Mode
PDF Prioritization	719	F1h CFh	Disable
PDF Prioritization Timeout	720	F1h D0h	200
Presentation Mode Field of View	609	F1h 61h	Full
Decoding Illumination	298	F0h 2Ah	Enable
Illumination Brightness	669	F1h 9Dh	5

Table 14 User Preferences Parameter Defaults (Continued)

Parameter	Parameter Number	SSI Number	Default
Scan Data Transmission Format	235	EBh	Data Suffix
Transmit Code ID Character	45	2Dh	None
Transmit No Read Message	94	5Eh	Disable
Unsolicited Heartbeat Interval	1118	F8h 04h 5Eh	0
securPharm Decoding	1752	F8h 06h D8h	Disable securPharm Decoding
securPharm Output Formatting	1753	F8h06hD9h	No Formatting
Motion Detect Mode (Wakeup)	2377	F8h 09h 49h	IR Detect
Rescan Beep	2382	F8h 09h 4Eh	0


User Preferences

Set feature values by scanning the desired parameter values.

Default Parameters

Scan one of the following barcodes to reset the scanner to its default settings.

- Restore Defaults resets all default parameters as follows:
 - If you configured custom default parameter values via the Write to Custom Defaults barcode, scanning the Restore Defaults barcode restores these custom values.
 - If you did not configure custom default parameter values, scanning the Restore Defaults barcode restores the factory default values. Default values are available at the beginning of each section.
- Set Factory Defaults clears all custom default values and sets the factory default values. Default values are available at the beginning of each section.



Restore Defaults



Set Factory Defaults



Write to Custom Defaults

Report Software Version

When contacting support, a support representative may ask you to scan the bar code below to determine the version of software installed in the scanner.

Lock/Unlock Parameter Scanning

Lock Parameter # 802 (SSI # F2h 22h)

Unlock Parameter # 803 (SSI # F2h 23h)

This feature locks parameter settings with a 4-digit code to prevent the user from changing parameter values by scanning parameter barcodes. This provides an added level of security not offered via Disable Parameter Barcode Scanning.

After locking parameter settings, only the **Unlock** parameter barcode is accepted with the correct code.



NOTE: [Parameter Barcode Scanning](#) must be enabled in order to scan the Lock parameter barcode. Once parameter scanning is locked, using the Enable or Disable Parameter Barcode Scanning option results in a parameter error beep.



Lock



Unlock

Parameter Barcode Scanning

Parameter # 236 (SSI # ECh)

This parameter selects whether to enable or disable the decoding of parameter barcodes, including the **Set Defaults** barcodes.



*Enable Parameter Barcode Scanning (1)



Disable Parameter Barcode Scanning (0)

Beep After Good Decode

Parameter # 56 (SSI # 38h)

This parameter determines whether or not the scanner beeps after a good decode. If you select **Disable Beep After Good Decode**, the beeper still operates during parameter menu scanning and to indicate error conditions.



*Enable Beep After Good Decode (1)



Disable Beep After Good Decode (0)

Beeper Volume

Parameter # 140 (SSI # 8Ch)

This parameter selects the volume of the beeper.



Low Volume (2)



Medium Volume (1)



*High Volume (0)

Beeper Tone

Parameter # 145 (SSI # 91h)

This parameter selects a beeper tone for a successful decode beep.



Disable Tone (3)



Low Tone (2)



*Medium Tone (1)



High Tone (0)



Medium to High Tone (2-tone) (4)

Beeper Duration

Parameter # 628 (SSI # F1h 74h)

This parameter selects the duration for the good decode beep.



Short Duration (0)



*Medium Duration (1)



Long Duration (2)

Suppress Power Up Beeps

Parameter # 721 (SSI # F1h D1h)

This parameter selects whether or not to suppress the scanner's power-up beeps.



*Do Not Suppress Power Up Beeps (0)



Suppress Power Up Beeps (1)

LED on Good Decode

Parameter # 744 (SSI # F1h E8h)

This parameter selects whether or not the LED blinks on a good decode.



*Enable LED on Good Decode (2)



Disable LED on Good Decode (0)

Indicator LED Brightness

Parameter # 1317 (SSI # F8h 05h 25h)

This parameter controls the brightness of the LED indicator bars during normal operation.

The SP20 LED brightness has two options: High (default) and Low.



NOTE: To change the illumination LED brightness, go to [Illumination Brightness](#).



*High (1)



Low (0)

Trigger Mode

Parameter # 138 (SSI # 8Ah)

This parameter allows you to change your scanner's behavior to initiate a decode.

Choose one of the following to select a trigger mode for the scanner:

- Standard (Level) - A software trigger press activates decode processing. Decode processing continues until the barcode decodes, you release the software trigger or the [Decode Session Timeout](#) occurs. If the software trigger is released before the timeout expires, the decode session terminates and no decode occurs.
- Presentation (Blink) - The scanner activates decode processing when it detects a barcode in its field of view. After a period of non-use, the LEDs turn off until the scanner senses motion.



Standard (Level) (0)




*Presentation (Blink) (7)

Decode Session Timeout

Parameter # 136 (SSI # 88h)

This parameter sets the maximum time decode processing continues during a scan attempt. It is programmable in 0.1 second increments from 0.5 to 9.9 seconds. The default timeout is 9.9 seconds.

To set a Decode Session Timeout, scan the following barcode, and then scan two barcodes from [Numeric Barcodes](#) that correspond to the desired on time. Enter a leading zero for single digit numbers. For example, to set a Decode Session Timeout of 0.5 seconds, scan this barcode, and then scan the 0 and 5 barcodes. To correct an error or change the selection, scan [Cancel](#).



Decode Session Timeout

Hands-Free Decode Session Timeout

Parameter # 400 (SSI # F0 90)

This parameter is the hands-free compliment to the Decode Session Timeout. It configures the minimum and maximum decode processing time during a hands-free scan attempt. It only applies to the hands-free trigger mode or when a scanner is placed in the gooseneck stand.

The range for this parameter is 0-255 with a default value of 15.

The minimum decode processing time is defined as the time in which the scanner stops decoding when an object is removed or left stationary in the imaging field of view.

The maximum decode processing time is defined as the time in which the scanner stops decoding when an object remains in or is moving in the field of view.

Both the maximum and minimum times are configured using a single setting. The relationship of this setting is as follows:

Setting Value ^a	Minimum Time	Maximum Time
X < 25	250 ms	2.5 seconds
X ≥ 25	X * 10 ms	X * 100 ms

^a value must be three digits.

For example, a value of 100 causes the scanner to turn off for approximately 1 second after an object is removed from the field of view or 10 seconds while an object is in the field of view moving.

The default value of the setting is 15, which results in a minimum time of 150 ms and a maximum time of 1.5 sec.

Adjust this setting based on your requirements. For example, this parameter should be set to a value where the maximum time is above the PDF prioritization timeout value when the scanner uses PDF prioritization .

To set a three-digit value, scan the following barcode and then scan three barcodes from [Numeric Barcodes](#). Enter a leading zero for single-digit numbers. To correct an error or change a selection, scan Cancel.



Hands-Free Decode Session Timeout


Timeout Between Decodes, Same Symbol

Parameter # 137 (SSI # 89h)

Use this option in Presentation Mode or Continuous Barcode Read Mode to prevent the scanner from continuously decoding the same barcode while it remains in the scanner's field of view. The barcode must be removed from the field of view for the timeout period before the scanner reads the same consecutive symbol.

Timeout Between Decodes, Same Symbol is programmable in 0.1 second increments from 0.0 to 9.9 seconds. The default interval is 0.5 seconds.

To select the timeout between decodes for the same symbol, scan the following barcode, and then scan two barcodes from [Numeric Barcodes](#) that correspond to the desired interval, in 0.1 second increments.



Timeout Between Decodes, Same Symbol

Timeout Between Decodes, Different Symbols

Parameter # 144 (SSI # 90h)

This parameter controls the time the scanner waits before decoding a different symbol. Use this parameter when the scanner is in Presentation Mode or Continuous Barcode Read.

Timeout Between Decodes, Different Symbols is programmable in 0.1 second increments from 0.1 to 9.9 seconds. The default is 0.1 seconds.

To set the timeout for decoding different symbols, scan the following barcode, and then scan two barcodes from Numeric Barcodes that correspond to the desired interval, in 0.1 second increments.



Timeout Between Decodes, Different Symbols

Mobile Phone/Display Mode

Parameter # 716 (SSI # F1h CCh)


This mode improves barcode reading performance off mobile phones and electronic displays. Scan one of the following barcodes to select the desired mode.

Mobile barcodes include barcodes on mobile phone displays, PC displays, or other reflective surfaces such as clear plastic bags or cellophane wrapping. Printed barcodes include barcodes printed on paper or other non-reflective surfaces.

- 0 – Normal (disabled) mobile display mode.
- 2 – Enhanced in Hands-free mode.



Enhanced in Hands-Free Mode (2)



*Disable Mobile Phone/Display Mode (0)

PDF Prioritization

Parameter # 719 (SSI # F4h F1h CFh)

Enable this parameter to delay decoding certain 1D barcodes by the value specified in PDF Prioritization Timeout.

During the [PDF Prioritization Timeout](#) time, the scanner attempts to decode a PDF417 symbol (for example, on a US driver's license), and if successful, reports this only. If it does not decode (cannot find) a PDF417 symbol, it reports the 1D symbol after the timeout. The 1D symbol must be in the device's field of view for the scanner to report it. This parameter does not affect decoding other symbologies.

The 1D Code 128 barcode lengths include the following:

- 7 to 10 characters
- 14 to 22 characters
- 27 to 28 characters

In addition, a Code 39 barcode with the following lengths are considered to potentially be part of a US driver's license:

- 8 characters
- 12 characters



Enable PDF Prioritization (1)



*Disable PDF Prioritization (0)

PDF Prioritization Timeout

Parameter # 720 (SSI # F1h D0h)

If you enabled PDF Prioritization, set this timeout to indicate how long the scanner attempts to decode a PDF417 symbol before reporting the 1D barcode in the field of view.

The PDF Prioritization Timeout range is 0 to 5000 ms, and the default is 200 ms.

Scan the following barcode, and then scan four barcodes from [Numeric Barcodes](#) that specify the timeout in milliseconds. For example, to enter 400 ms, scan the following barcode, and then scan 0400.



PDF Prioritization Timeout

Presentation Mode Field of View

Parameter # 609 (SSI # F1h 61h)

This parameter sets the size of the search area.

In presentation mode, the default setting of Full Field of View allows the scanner to search the entire area of the imaging field of view.

Select Small Field of View or Medium Field of View to search for a barcode in a smaller centered region of the imaging field of view to speed up search time.



Small Field of View (0)



Medium Field of View (1)



*Full Field of View (2)


Decoding Illumination

Parameter # 298 (SSI # F0h 2Ah)

This parameter determines whether the scanner turns on illumination to aid decoding. Enabling illumination usually produces superior images and better decode performance. The effectiveness of the illumination decreases as the distance to the target increases.



*Enable Decoding Illumination (1)



Disable Decoding Illumination (0)

Illumination Brightness

Parameter # 669 (SSI # F1h 9Dh)

This parameter sets the illumination brightness by altering LED power.

Illumination Brightness values range from 1 to 10, with 10 being the highest level of brightness. The default is 5.

To set the illumination brightness, scan the following barcode, and then scan two barcodes in [Numeric Barcodes](#) that correspond to the value of desired illumination brightness. For example, to set illumination brightness to 8, scan the Illumination Brightness barcode, and then scan the 0 and 8 barcodes.



Illumination Brightness

Scan Data Transmission Format

Parameter # 235 (SSI # EBh)

This parameter defines the format used for transmitting scan data.



NOTE: When using this parameter, avoid applying ADF rules to configure the prefix or suffix.



*Data As Is (0)



<DATA> <SUFFIX 1> (1)



<DATA> <SUFFIX 2> (2)



<DATA> <SUFFIX 1> <SUFFIX 2> (3)



<PREFIX> <DATA> (4)



<PREFIX> <DATA> <SUFFIX 1> (5)



<PREFIX> <DATA> <SUFFIX 2> (6)



<PREFIX> <DATA> <SUFFIX 1> <SUFFIX 2> (7)

Transmit Code ID Character

Parameter # 45 (SSI # 2Dh)

A Code ID character identifies the code type of a scanned barcode. This is useful when decoding more than one code type. In addition to any single character prefix selected, the Code ID character is inserted between the prefix and the decoded symbol.

The Code ID character options are:

- No Code ID character

- Symbol Code ID character
- AIM Code ID character

For Code ID characters, see [Symbol Code Identifiers](#) and [AIM Code Identifiers](#).



Symbol Code ID Character (2)



AIM Code ID Character (1)



*None (0)

Transmit No Read Message

Parameter # 94 (SSI # 5Eh)

This parameter sets an option for transmitting the No Read (NR) characters.



NOTE: If you enable Transmit No Read, and also enable Symbol Code ID Character or AIM Code ID Character for [Transmit Code ID Character](#), the scanner appends the code ID for Code 39 to the NR message.

This does not apply in presentation mode.

- Enable No Read - transmits the characters NR when a successful decode does not occur before software trigger release or the Decode Session Timeout expires.
- Disable No Read - sends nothing to the host if a symbol does not decode.



Enable No Read (1)



*Disable No Read (0)

Unsolicited Heartbeat Interval

Parameter # 1118 (SSI # F8h 04h 5Eh)

When this parameter is enabled, the scanner can send unsolicited heartbeat messages to assist in diagnostics. The range is 0 - 9999.

The heartbeat event is sent as decode data (with no decode beep) in the form of:

MOTEVTHB : nnn


Where: nnn is a three-digit sequence number starting at 001 and wrapping after 100.

To enable this parameter and set the desired unsolicited heartbeat interval, scan one of the following time interval barcodes, or scan Set Another Interval followed by four barcodes from [Numeric Barcodes](#) that correspond to the desired number of seconds.

Scan Disable Unsolicited Heartbeat Interval to turn off the feature.




10 Seconds (10)



1 Minute (60)



Set Another Interval



*Disable Unsolicited Heartbeat Interval (0)

securPharm Decoding

Parameter # 1752 (SSI # F8h 06h D8h)

securPharm implements the IFA and GS1 Coding System for the European pharmaceutical industry. securPharm code is used to prevent pharmaceutical counterfeiting. This parameter enables or disables the ability to process pharmaceutical type barcodes.

When this parameter is enabled, if a GS1 symbol is decoded and includes any aspects of the Application Identifier associated with the securPharm GS1 specifications, the entire GS1 symbol is processed as a securPharm symbol. For this reason, it is expected that under certain circumstances, a GS1 barcodes

that is a securPharm symbol may not be processed properly; if the GS1 symbol is not created as per the specification. The output cannot be guaranteed as valid.

Although the GS1-128 and GS1 DataBar family barcodes are supported, they are not indicated in the IFA specification.

The securPharm output is in XML format and can include the product number, serial number, lot number, expiration and Date of Manufacturing. The XML tags can be arranged in any order. Tags that are not in the barcode are omitted. For example:

```
<content dfi="value_dfi">
  <Daten_1>value_Daten_1</Daten_1>
  <Daten_2>value_Daten_2</Daten_2>
  <Daten_n>value_Daten_n</Daten_n>
</content>
```

Where:

- value_dfi = IFA or GS1
- Daten_1 to Daten_n is the production number, serial number, etc.



*Disable securPharm Decoding (0)



Enable securPharm Decoding (1)

securPharm Output Formatting

Parameter # 1753 (SSI # F8h 06h D9h)

securPharm Output Formatting parameter options represent bit positions. Therefore, any combination of formatting can be used.



NOTE: securPharm output formatting is effective only when [securPharm Decoding](#) is enabled.

When you scan a securPharm Output Formatting barcode, the securPharm output is formatted in a number of ways.

Sample GS1 Format

Product Number: GTIN Data Identifier DI Data Format Identifier: GS1



Sample GS1 Output - Feature Disabled

The output has no format:

```
0104150123456782101A234B517151231211234567890123456
```

Sample GS1 Output - No Formatting (0)

The output is a single line of characters:

```
<content dfi="GS1"><gtin>04150123456782</gtin><lot>1A234B5</lot><exp>151231</exp><sn>1234567890123456</sn></content>
```

Sample GS1 Output - Insert Tab (1)

The output is a single line of characters with a tab inserted in the XML body:

```
<content dfi="GS1">[tab]<gtin>04150123456782</gtin>[tab]<lot>1A234B5</lot>[tab]<exp>151231</exp>[tab]<sn>1234567890123456</sn></content>
```

Sample GS1 Output - Insert New Line (2)

The output consists of multiple lines of characters with a new line character at the end of each line.

```
<content dfi="GS1">
<gtin>04150123456782</gtin>
<lot>1A234B5</lot>
<exp>151231</exp>
<sn>1234567890123456</sn>
</content>
```


Sample GS1 Output - Insert Tab and New Line (3)

The output consists of multiple lines of characters with tabs and a new line character at the end of each line.

```
<content dfi="GS1">
[tab] <gtin>04150123456782</gtin>
[tab] <lot>1A234B5</lot>
[tab] <exp>151231</exp>
[tab] <sn>1234567890123456</sn>
</content>
```

Sample IFA Format

Product Number: PPN Data Identifier DI Data Format Identifier: IFA

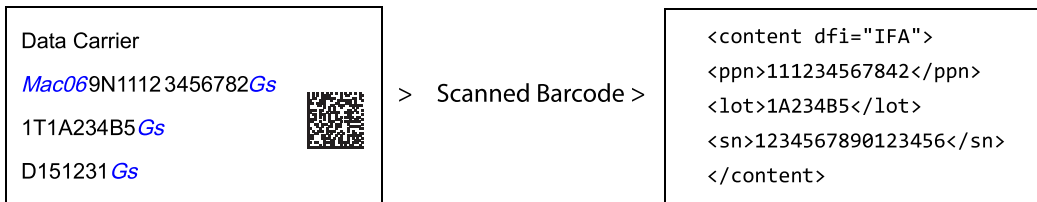

Sample GS1 Output - Feature Disabled

The output has no format:

```
[ ]>069N1112345678421T1A234B5S1234567890123456
```

Sample GS1 Output - No Formatting (0)

The output is a single line of characters:

```
<content dfi="IFA"><ppn>111234567842</ppn><lot>1A234B5</
lot><sn>1234567890123456</sn></content>
```

Sample GS1 Output - Insert Tab (1)

The output is a single line of characters with a tab inserted in the XML body:

```
<content dfi="IFA">[tab]<ppn>111234567842</ppn>[tab]<lot>1A234B5</
lot>[tab]<sn>1234567890123456</sn></content>
```

Sample GS1 Output - Insert New Line (2)

The output consists of multiple lines of characters with a new line character at the end of each line.

```
<content dfi="IFA">
<ppn>111234567842</ppn>
<lot>1A234B5</lot>
<sn>1234567890123456</sn>
</content>
```

Sample GS1 Output - Insert Tab and New Line (3)

The output consists of multiple lines of characters with tabs and a new line character at the end of each line.

```
<content dfi="IFA">
[tab]    <ppn>111234567842</ppn>
[tab]    <ppn>111234567842</ppn>
[tab]    <lot>1A234B5</lot>
[tab]    <sn>1234567890123456</sn>
</content>
```

securPharm Output Formatting Barcodes

Scan a barcode below to format the securPharm output.



*No Formatting (0)



Insert Tab (1)



Insert New Line (2)



Insert Tab and New Line (3)

Motion Detect Mode (Wakeup)

Parameter # 2377 (SSI # F8 09 49)

This parameter selects the method used to detect motion and activate a decode session.

- IR Detect: A decode session is triggered when the infrared proximity sensor detects a barcode.
- Object Detect: A decode session is triggered when the imaging sensor detects a barcode. Illumination increases, and decoding is enabled. Object detection mode requires some illumination to detect an object, such as a barcode.



*IR Detect (3)



Object Detect (1)

Rescan Beep


Parameter #2382 (SSI # F8 09 4E)

This feature allows the user to acoustically recognize if/when an item is scanned multiple times, either intentionally or unintentionally.

The standard decode tone is heard after the 1st decode and any odd numbered decode after that (3rd, 5th, 7th, etc.). A higher frequency “rescan beep” tone is heard after the 2nd decode and any even-numbered decode after that (2nd, 4th, 6th, etc.). If the standard decode tone is changed to something other than the default, the odd-numbered decodes would use this newly defined tone while the even-numbered decodes would always use the rescan beep tone.

When this feature is disabled, the standard decode tone will be used for all decodes.

To enable this feature, scan the Enable barcode followed by three barcodes from [Numeric Barcodes](#) to set the Rescan Beep Timeout. The Rescan Beep Timeout determines how long the scanner will wait between decodes before it considers the next decode a 1st scan attempt. The Rescan Beep Timeout range is 0 (000) to 255 (255) seconds. We recommend setting this parameter initially to 5 (005) seconds and adjusting as needed.



Rescan Beep Enable

Image Capture Preferences

You can program the imager to perform various functions, or you can activate different features. This section describes image capture preference features and provides programming barcodes for selecting these features.



NOTE: Only the Symbol Native API (SNAPI) with Imaging interface supports image capture. See [USB Device Type](#) to enable this host.

Setting Image Capture Parameters

To set feature values, scan a single barcode or a short barcode sequence. The settings are stored in non-volatile memory and are preserved even when the imager powers down.



NOTE: Most computer monitors allow scanning barcodes directly on the screen. When scanning from the screen, be sure to set the document magnification to a level where you can see the barcode clearly, and bars and/or spaces do not merge.

Image Capture Scanning Sequence Examples

You can scan a barcode to set a parameter value.

For example, to disable image capture illumination, scan the Disable Image Capture Illumination barcode found in [Image Capture Illumination](#). After enabling this setting, the imager issues a fast warble beep and the LED turns green, signifying a successful parameter entry.

Other parameters require scanning several barcodes. See the parameter descriptions for this procedure.

Image Capture Errors While Scanning

Unless otherwise specified, to correct an error during a scanning sequence, just re-scan the correct parameter.

Image Capture Preferences Parameter Defaults

The image capture preferences parameter defaults lists defaults for image capture preference parameters.

- Scan the appropriate barcodes in this chapter. The new value replaces the standard default value in memory. To recall default parameter values, see [Default Parameters](#).
- Configure the scanner using the 123Scan configuration program. See [123Scan and Software Tools](#).

Image Capture Preferences

Table 15 Parameter Default Table

Parameter	Parameter Number	SSI Number	Parameter Default
Image Capture			
Image Capture Autoexposure	360	F0h 68h	Enable
Fixed Exposure	567	F1h37h	100
Analog Gain	1232	F8h04hD0h	1
Digital Gain	1233	F8h 04h D1h	32
Image Capture Illumination	361	F0h69h	1
Image Brightness (Target White)	390	F0h 86h	180
Image Size (Number of Pixels)	302	F0h 2Eh	Full
Image Enhancement	564	F1h 34h	Low
Image File Format Selector	304	F0h 30h	JPEG
Bits Per Pixel	303	F0h 2Fh	8 BPP
Image Rotation	665	F1h 99h	None
JPEG Image Optimization			
JPEG Image Options	299	F0h 2Bh	JPEG Quality Selector
JPEG Size Value	561	F1h 31h	160
JPEG Quality Value	305	F0h 31h	65
Snapshot Mode			
Snapshot Aiming Illumination	300	F0h 2Ch	Enable
Gain/Exposure Priority for Snapshot Mode	562	F1h 32h	Autodetect
Snapshot Mode Timeout	323	F0h 43h	30 sec
Silence Operational Mode Changes	1293	F8h05h0Dh	0
Image Cropping			
Image Cropping	301	F0h 2Dh	Disable
Crop to Pixel Addresses	Top Pixel Address: 315 Left Pixel Address: 316 Bottom Pixel Address: 317 Right Pixel Address: 318	F0h 3Bh F0h 3Ch F0h 3Dh F0h 3Eh	0h 0 799 1279

Table 15 Parameter Default Table (Continued)

Parameter	Parameter Number	SSI Number	Parameter Default
Video			
Video View Finder	324	F0h 44h	Disable

Image Capture Preferences Modes and Parameters

The parameters in this section control image capture characteristics.

Operational Modes

The scanner can have up to two modes of operation.

- Decode Mode
- Snapshot Mode

Decode Mode

By default, the scan module attempts to locate and decode enabled barcodes within its field of view.

Snapshot Mode

Use Snapshot Mode to capture a high-quality image and transmit it to the host. Select the Snapshot Mode option to temporarily enter this mode. While in this mode the imager blinks the green LED at one-second intervals to indicate it is not in standard operating (decode) mode.

In this mode the scanner will transmit video to the host to allow the user to locate the image they want to be taken. The scanner does not have a trigger, as a result the scanner will rely on a software trigger command from the host. Supported only in SNAPi and SSI protocols.

In Snapshot Mode, the imager turns on its illumination to highlight the area to capture in the image. The next trigger command instructs the imager to capture a high-quality image and transmit it to the host. A short time may pass (less than two seconds) between when the command is received and when the image is captured as the imager adjusts to lighting conditions.

If you do send a trigger command within the Snapshot Mode Timeout period, the imager returns to Decode Mode. Use [Snapshot Mode Timeout](#) to adjust this timeout period. The default timeout period is 30 seconds.



Snapshot Mode

Image Capture Autoexposure

Parameter # 360 (SSI # F0h 68h)

Image Capture Preferences

This parameter allows the imager to control gain and exposure (integration time) settings to best capture an image in Snapshot mode.


- Enabled - Allows the imager to control gain and exposure settings to best capture an image.
- Disabled - The gain and exposure setting must be adjusted manually.



NOTE: Disabling Image Capture Autoexposure is only recommended for advanced users with difficult image capture situations.



*Enable Image Capture Autoexposure (1)



Disable Image Capture Autoexposure (0)

Fixed Exposure


Parameter # 567 (SSI # F4h F1h 37h)

This parameter configures the exposure used in manual mode for Snapshot and Video modes. Each integer value represents 100 microseconds of exposure. The default value is 100 which results in an exposure setting of 10 ms microseconds.

Type: Word

Range: 5 to 1000

To set the exposure, scan the Fixed Exposure barcode, and then scan four barcodes from [Numeric Barcodes](#) representing the value. Leading zeros are required. For example, to set a Fixed Exposure value of 99, scan 0, 0, 9, 9.




Fixed Exposure (4 digits)

Analog Gain

Parameter # 1232 (SSI # F4h D0h)

If you disable Decoding Autoexposure or Image Capture Autoexposure, you can modify the scan engine's analog gain.



Analog Gain x 1 (0)



*Analog Gain x 2 (1)



Analog Gain x 4 (2)



Analog Gain x 8 (3)

Digital Gain

Parameter # 1233 (SSI # F4h D1h)

This parameter adjusts the digital gain.

A value of 32 = x 1 digital gain; i.e., $\text{digital gain} = 1/32 \times \text{digital gain parameter value}$.

Scan digital gain, and then scan two barcodes from [Numeric Barcodes](#) to enter a 2-digit value for the digital gain. The default is 32.



Digital Gain

Image Capture Illumination

Parameter # 361 (SSI # F0h 69h)

This parameter activates the illumination during every image capture.


- Enabled - Illumination is on during image capture.
- Disabled - Prevents the imager from using illumination.



NOTE: Enabling this parameter usually produces superior images. The effectiveness of illumination decreases as the distance to the target increases.



*Enable Image Capture Illumination (1)



Disable Image Capture Illumination (0)

Image Brightness (Target White)

Parameter # 390 (SSI # F0h 86h)

This parameter sets the Target White value used in Snapshot and Video Viewfinder modes when using auto exposure.

Type: Byte


Range: 1 - 240

- Image Brightness (3 digits) - Represents the image brightness value.
- 180 - Sets the white level of the image to ~180.



NOTE: White and black are defined as the maximum value decimal and 1, respectively.

Scan Image Brightness, and then scan three barcodes from [Numeric Barcodes](#) representing the value. Leading zeros are required. For example, to set an Image Brightness value of 99, scan 0, 9, 9.



*180



Image Brightness (3 digits)

Image Size (Number of Pixels)

Parameter # 302 (SSI # F0h 2Eh)

This option alters image resolution before compression. Multiple pixels are combined into one pixel, resulting in a smaller image containing the original content with reduced resolution.

Select a resolution value to produce an image size.

Table 16 Image Size

Resolution Value	Uncropped Image Size
Full	1280 x 800
1/2	640 x 400
1/4	320x200



*Full Resolution (0)



1/2 Resolution (1)



1/4 Resolution (3)

Image Enhancement

Parameter # 564 (SSI # F1h 34h)


This parameter uses a combination of edge sharpening and contrast enhancement to produce an image that is visually pleasing.

Select the level of image enhancement:

- Off (0)
- *Low (1)
- Medium (2)
- High (3)



Off (0)



*Low (1)



Medium (2)




High (3)

Image File Format Selector

Parameter # 304 (SSI # F0h 30h)

This parameter selects an appropriate image format for the system: BMP, TIFF, and JPEG. The imager stores captured images in the selected format.



BMP File Format (3)



*JPEG File Format (1)



TIFF File Format (4)

Bits Per Pixel


Parameter # 303 (SSI # F0h 2Fh)

Use this parameter specifies the number of significant bits per pixel (BPP) to use when capturing an image.

- 1 BPP - For a black and white image.
- 4 BPP - Assigns 1 of 16 levels of grey to each pixel.
- 8 BPP - Assigns 1 of 256 levels of grey to each pixel.




NOTE: The imager ignores these settings for JPEG file formats, which support only 8 BPP. TIFF file formats support only 4 BPP and 8 BPP. If **1 BPP** is selected for TIFF, the 4 BPP option is applied.



1 BPP (0)



4 BPP (1)




*8 BPP (2)

Image Rotation

Parameter # 665 (SSI # F1h 99h)


Use this parameter to rotate an image by 90-degree increments (0, 90, 180, or 270).



*Rotate 0° (0)



Rotate 90° (1)



Rotate 180° (2)



Rotate 270° (3)


JPEG Image Options

Parameter # 299 (SSI # F0h 2Bh)


This parameter changes the JPEG image quality or size.

- **JPEG Quality Selector** - Enter a quality value via the [JPEG Quality Value](#) parameter; the imager then selects the corresponding image size.

- **JPEG Size Selector** - Enter a size value via the [JPEG Size Value](#) parameter; the imager then selects the best image quality.



*JPEG Quality Selector (1)



JPEG Size Selector (0)

JPEG Size Value

Parameter # 561 (SSI # F1h 31h)

Type: Word

Range: 5-350


Default:

If you selected **JPEG Size Selector**, use **JPEG Size Value** to set the JPEG size.



CAUTION: JPEG compression may take 10 to 15 seconds based on the amount of information in the target image. Selecting [JPEG Quality Selector](#) produces a compressed image that is consistent in quality and compression time.

To set the JPEG size, scan **JPEG Size Value** and then scan three barcodes from [Numeric Barcodes](#) representing the target JPEG file size in kilobytes (KB). Leading zeros are required. For example, to set an image file size value of 99, scan 0, 9, 9.



JPEG Size Value (Default: 160) (3 digits)

JPEG Quality Value

Parameter # 305 (SSI # F0h 31h)

This parameter adjusts the quality of the JPEG.



NOTE: Use this parameter if you have selected **JPEG Quality Selector** as a JPEG Image Option.

Select **JPEG Quality Value**, and then scan three barcodes from [Numeric Barcodes](#) corresponding to a value from 5 to 100, where 100 represents the highest quality image. Leading zeros are required. For example, to set an image quality value of 55, scan 0, 5, 5.




JPEG Quality Value (Default: 065) (5 - 100
Decimal)

Snapshot Aiming Illumination

Parameter # 300 (SSI # F0h 2Ch)

This parameter determines whether or not to project aiming illumination when in Snapshot Mode.

- *Enable Snapshot Aiming Illumination - The scanner illumination frames the image for aiming purposes before the actual image is acquired.
- Disable Snapshot Aiming Illumination - The aiming pattern does not frame the image for aiming purposes before the actual image is acquired.



*Enable Snapshot Aiming Illumination (2)



Disable Snapshot Aiming Illumination (0)

Gain/Exposure Priority for Snapshot Mode

Parameter # 562 (SSI # F1h 32h)

This parameter alters the imager's gain exposure priority when it acquires an image in Snapshot Mode while in autoexposure mode.

- Low Exposure Priority - The imager prioritizes higher gain over exposure to capture an image, resulting in an image that is less susceptible to motion blur at the expense of noise artifacts. This is suitable for most applications where noise levels are acceptable.
- Low Gain Priority - The imager prioritizes longer exposure time rather than higher gain to capture an image, ensuring the image is less noisy and produces fewer artifacts during post processing activities like image enhancement (sharpening). This mode is recommended for fixed mount / fixed object image capture since the image acquired is susceptible to motion blur.
- Autodetect - The imager automatically selects Gain Priority or Low Exposure Priority mode for Snapshot Mode. If the imager is in a magnetic reed switch-enabled stand (or it is configured in Blink Mode), it uses Low Gain Priority. Otherwise, it uses the Low Exposure Priority.



Low Gain Priority (0)



Low Exposure Priority (1)



*Autodetect (2)

Snapshot Mode Timeout

Parameter # 323 (SSI # F0h 43h)

This parameter sets the amount of time the imager remains in Snapshot Mode.

- Set Snapshot Mode Timeout - scan this parameter and then scan a barcode from [Numeric Barcodes](#). Values increment by 30. For example, 1 = 60 seconds, 2 = 90 seconds.
- 30 Seconds - resets timeout to 30 seconds.
- No Timeout - the imager remains in Snapshot Mode until you initiate a decode session.



Set Snapshot Mode Timeout



*30 Seconds



No Timeout

Silence Operational Mode Changes

Parameter # 1293 (SSI # F8h 05h 0Dh)

This parameter silences the beeper when switching between operational modes (for example, from Decode Mode to Snapshot Mode).

- Enabled - Silences the beep when switching between operational modes.
- Disabled - Allows the beep when switching between operational modes.



Silence Operational Mode Changes (Enable) (1)



*Do Not Silence Operational Mode Changes (Disable) (0)

Image Cropping

Parameter # 301 (SSI # F0h 2Dh)

This parameter crops a captured image to the pixel addresses set in Crop to Pixel Addresses.

- Enabled - Crops the captured image.
- Disabled - Does not crop the captured image.



Enable Image Cropping (1)



*Disable Image Cropping (Use Full Pixels) (0)

Crop to Pixel Addresses

Parameter # 315 (SSI # F4h F0h 3Bh) (Top)

Parameter # 316 (SSI # F4h F0h 3Ch) (Left)

Parameter # 317 (SSI # F4h F0h 3Dh) (Bottom)

Parameter # 318 (SSI # F4h F0h 3Eh) (Right)

When Image Cropping is enabled, use this parameter to set the pixel addresses.

The pixel addresses value range is (0,0) to 1279 x 799.

- Top Pixel Address - A value with the left pixel address to begin an image crop.
- Left Pixel Address - A value with the top pixel address to begin an image crop.
- Right Pixel Address - A value with the right pixel address to end an image crop.
- Bottom Pixel Address - A value with the right pixel address to end an image crop.

Columns are numbered from 0 to 1279, rows from 0 to 799. Specify values for Top, Left, Bottom, and Right, where Top and Bottom correspond to row pixel addresses, and Left and Right correspond to column pixel addresses.

Image Capture Preferences



NOTE: The imager has a cropping resolution of 4 pixels. Setting the cropping area to less than 4 pixels (after resolution adjustment, see [Image Size](#)) transfers the entire image.


To crop to the pixel addresses, enable Image Cropping, and then scan four barcodes from [Numeric Barcodes](#) representing the value.




Top Pixel Address (0 - 799 Decimal)



Left Pixel Address (0 - 1279 Decimal)



Bottom Pixel Address (0 - 799 Decimal)



Right Pixel Address (0 - 1279 Decimal)

Video View Finder

Parameter # 324 (SSI # F0h 44h)

This parameter projects the video viewfinder while in Snapshot mode.

- Enabled - Projects the video viewfinder.
- Disabled - Does not project the video viewfinder.



Enable Video View Finder (1)



*Disable Video View Finder (0)

Symbologies

You can program the scanner to perform various functions or activate different features.

This section describes symbology features and provides programming barcodes for selecting these features.

The scanner ships with the settings shown in the [Symbology Parameter Defaults table](#). If the default values suit requirements, programming is not necessary.

Symbologies Parameter Defaults

Table 17 Parameter Defaults

Parameter	Parameter Number	SSI Number	Default
UPC/EAN/JAN			
UPC-A	1	01h	Enable
UPC-E	2	02h	Enable
UPC-E1	12	0Ch	Disable
EAN-8/JAN-8	4	04h	Enable
EAN-13/JAN-13	3	03h	Enable
Bookland EAN	83	53h	Disable
Bookland ISBN Format	576	F1h 40h	ISBN-10
ISSN EAN	617	F1h 69h	Disable
User-Programmable Supplementals	579	F1h 43h	0
UPC/EAN/JAN Supplemental Redundancy	80	50h	10
UPC/EAN/JAN Supplemental AIM ID Format	672	F1h A0h	Combined AIM ID, 1 transmission
Transmit UPC-A Check Digit	40	28h	Enable
Transmit UPC-E Check Digit	41	29h	Enable

Table 17 Parameter Defaults (Continued)

Parameter	Parameter Number	SSI Number	Default
Transmit UPC-E1 Check Digit	42	2Ah	Enable
UPC-A Preamble	34	22h	System Character
UPC-E Preamble	35	23h	System Character
UPC-E1 Preamble	36	24h	System Character
Convert UPC-E to UPC-A	37	25h	Disable
Convert UPC-E1 to UPC-A	38	26h	Disable
EAN/JAN Zero Extend	39	27h	Disable
Coupon Report	730	F1h DAh	New Coupon Format
UPC Reduced Quiet Zone	1289	F8h 05h 09h	Disable
Linear UPC/EAN	68	44h	Enable
Decode UPC/EAN/JAN Supplementals	16	10h	Ignore UPC/EAN/JAN Supplementals
Code 128			
Code 128	8	08h	Enable
Set Lengths for Code 128	209	D1h	Any Length
GS1-128 (formerly UCC/EAN-128)	14	0Eh	Enable
ISBT 128	84	54h	Enable
ISBT Concatenation	577	F1h 41h	Disable ISBT Concatenation
Check ISBT Table	578	F1h 42h	Enable
ISBT Concatenation Redundancy	223	DFh	10
Code 128 FNC4	1254	F8h 04h E6h	Honor
Code 128 Security Level	751	FAh LSh SEh	Level 1
Code 128 Reduced Quiet Zone	1208	F8h 04h B8h	Disable
Code 39			
Code 39	0	00h	Enable
Convert Code 39 to Code 32	86	56h	Disable
Code 32 Prefix	231	E7h	Disable

Table 17 Parameter Defaults (Continued)

Parameter	Parameter Number	SSI Number	Default
Set Lengths for Code 39	18	12h	Length Within Range
Code 39 Check Digit Verification	48	30h	Disable
Transmit Code 39 Check Digit	43	2Bh	Disable
Code 39 Full ASCII Conversion	17	11h	Disable
Code 39 Security Level	750	F1h EEh	Level 1
Code 39 Stitching	70	46h	Disable
Code 39 Stitching Security Level	1206	F8h 04h B6h	Level 1
Code 39 Reduced Quiet Zone	1209	F8h 04h B9h	Disable
Transmit Code 39 Start/Stop Characters	1900	F8h 07h 6Ch	Disable
Code 93			
Code 93	9	09h	Enable
Set Lengths for Code 93	26	1Ah	Length Within Range
Interleaved 2 of 5			
Interleaved 2 of 5 (I 2 of 5)	6	06h	Enable
Set Lengths for Interleaved 2 of 5	22	16h	Length Within Range
Interleaved 2 of 5 (I 2 of 5) Check Digit Verification	49	31h	Disabled
Transmit I 2 of 5 Check Digit	44	2Ch	Disable
Convert I 2 Of 5 To Ean13	82	52h	Do Not Convert I 2 of 5 to EAN-13 (Disable)
Febraban	1750	F8h06hD6h	Disable
Interleaved 2 of 5 (I 2 of 5) Security Level	1121	F8h 04h 61h	Level 1
Interleaved 2 of 5 (I 2 of 5) Reduced Quiet Zone	1210	F8h 04h BAh	Disable
Discrete 2 of 5			
Discrete 2 of 5 (D 2 of 5)	5	05h	Disable

Table 17 Parameter Defaults (Continued)

Parameter	Parameter Number	SSI Number	Default
Set Lengths for Discrete 2 of 5	20	14h	Length Within Range
Codabar			
Codabar (NW - 7)	7	07h	Enable
Set Lengths for Codabar	24	18h	Length Within Range
CLSI Editing	54	36h	Disable
NOTIS Editing	55	37h	Disable
Codabar Security Level	1776	F8h 06h F0h	Codabar Security Level 1
Codabar Upper or Lower Case Start/Stop Characters	855	F2h 57h	Upper Case
Codabar Mod 16 Check Digit Verification	1784	F8h 06h F8h	Disable
Transmit Codabar Check Digit	704	F1h C0h	Disable
MSI			
MSI	11	0Bh	Disable
Set Lengths for MSI	30	1Eh	Length Within Range
MSI Check Digits	50	32h	One Check Digit
Transmit MSI Check Digit(s)	46	2Eh	Disable
MSI Check Digit Algorithm	51	33h	MOD 10/MOD 10
MSI Reduced Quiet Zone	1392	F8h 05h 70h	Disable
MSI Security Level	2122	F8h 08h 4Ah	Security Level 1
2 of 5			
Chinese 2 of 5	408	F0h 98h	Disable
Korean 3 of 5	581	F1h 45h	Disable
Inverse 1D	586	F1h 4Ah	Regular
GS1			
GS1 DataBar Omnidirectional (formerly GS1 DataBar-14)	338	F0h 52h	Enable
GS1 DataBar Limited	339	F0h 53h	Enable
GS1 DataBar Expanded	340	F0h 54h	Enable

Table 17 Parameter Defaults (Continued)

Parameter	Parameter Number	SSI Number	Default
Convert GS1 DataBar to UPC/EAN/JAN	397	F0h 8Dh	Disable
GS1 DataBar Security Level	1706	F8h 06h AAh	Level 1
GS1 DataBar Limited Margin Check	728	F1h D8h	Margin Check Level 3
GS1 Digital Link	2373	F8h 09h 45h	Disable
GS1 Digital Link Data Format	2509	F8h 09h CDh	Default Format
GS1 Digital Link Mode	2374	F8h 09h 46h	Mode 1 - GTIN Only
GS1 Digital Link Prioritization Timeout	2491	nan	200
Symbology-Specific Security Features			
Redundancy Level	78	4Eh	Level 1
Security Level	77	4Dh	Level 1
1D Quiet Zone Level	1288	F8h 05h 08h	Level 1
Intercharacter Gap Size	381	F0h 7Dh	Normal
Composite CC-C	341	F0h55h	Disable
Composite CC-A/B	342	F0h 56h	Disable
Composite TLC-39	371	F0h 73h	Disable
Composite Inverse	1113	F8h 04h 59h	Regular Only
UPC Composite Mode	344	F0h58h	Always Linked
Composite Beep Mode	398	F0h8Eh	Beep as each code type is decoded
GS1-128 Emulation Mode for UCC/EAN Composite Codes	427	F0hABh	Disable
PDF417			
PDF417	15	0Fh	Enable
MicroPDF417	227	E3h	Disable
Code 128 Emulation	123	7Bh	Disable
Data Matrix	292	F0h 24h	Enable
GS1 Data Matrix	1336	F8h 05h 38h	Disable
Data Matrix Inverse	588	F1h 4Ch	Inverse Autodetect
2D Barcodes			
Decode Data Matrix Mirror Images	537	F1h19h	Auto


Table 17 Parameter Defaults (Continued)

Parameter	Parameter Number	SSI Number	Default
QR Code	293	F0h25h	Enable
Weblink QR	1947	F8h 07h 9Bh	Enable
GS1 QR	1343	F8h05h3Fh	Enable
MicroQR	573	F1h 3Dh	Enable
Linked QR Mode	1847	F8h07h37h	Linked QR Only
Aztec	574	F1h 3Eh	Enable
Aztec Inverse	589	F1h 4Dh	Inverse Autodetect
Han Xin	1167	F8h 04h 8Fh	Disable
Han Xin Inverse	1168	F8h 04h 90h	Regular
Grid Matrix	1718	F8h 06h B6h	Disable
Grid Matrix Inverse	1719	F8h 06h B7h	Regular Only
Grid Matrix Mirrored	1736	F8h 06h C8h	Regular Only
DotCode	1906	F8h 07h 72h	Disable
DotCode Prioritize	1937	F8h 07h 91h	Enable
DotCode Inverse	1907	F8h 07h 73h	Inverse Autodetect
DotCode Mirrored	1908	F8h 07h 74h	Auto
DotCode Erasure Limit	2063	F8h08h0Fh	10


Enable/Disable All Code Types

Scan one of the following barcodes to enable or disable the scanner's ability to decode all barcode types.

- Disable All Code Types - Disable all code types. This is useful when enabling only a few code types.
- Enable All Code Types - Enable all code types. This is useful if you need to disable only a few code types.



Disable All Code Types



Enable All Code Types

UPC-A

Parameter # 1 (SSI # 01h)

This parameter enables or disables the scanner to decode UPC-A barcodes.

- *Enabled - enables UPC-A decoding.
- Disabled - disables UPC-A decoding.



*Enable UPC-A (1)



Disable UPC-A (0)

UPC-E


Parameter # 2 (SSI # 02h)

This parameter enables or disables the scanner to decode UPC-E barcodes.

- *Enabled - this sets UPC-E to use.
- Disabled - UPC-E is no longer in use.



*Enable UPC-E (1)



Disable UPC-E (0)

UPC-E1

Parameter # 12 (SSI # 0Ch)

This parameter enables or disables the scanner to decode UPC-E1 barcodes.

- Enabled - This sets UPC-E1 to use.
- Disabled - UPC-E1 is no longer in use.



NOTE: UPC-E1 is not a UCC (Uniform Code Council) approved symbology.



Enable UPC-E1 (1)



*Disable UPC-E1 (0)

EAN-8/JAN-8

Parameter # 4 (SSI # 04h)

This parameter enables or disables the scanner to decode EAN-8/JAN-8 barcodes.

- Enabled - Sets EAN-8/JAN-8 for use.
- Disabled - EAN-8/JAN-8 is no longer in use.



*Enable EAN-8/JAN-8 (1)



Disable EAN-8/JAN-8 (0)

EAN-13/JAN-13

Parameter # 3 (SSI # 03h)

This parameter enables or disables the scanner to decode EAN-13/JAN-13 barcodes.

- Enabled - Sets EAN-13/JAN-13 for use.
- Disabled - EAN-13/JAN-13 is no longer in use.



*Enable EAN-13/JAN-13 (1)



Disable EAN-13/JAN-13 (0)

Bookland EAN

Parameter # 83 (SSI # 53h)

This parameter enables or disables the scanner to decode Bookland EAN barcodes.

- Enabled - This sets Bookland EAN for use.
- Disabled - Bookland EAN is no longer in use.



NOTE: If you enable Bookland EAN, select a [Bookland ISBN Format](#). Also set [Decode UPC/EAN/JAN Supplementals](#), select one of the following options:

- Decode UPC/EAN/JAN with Supplementals Only
- Autodiscriminate UPC/EAN/JAN With Supplementals
- Enable 978/979 Supplemental Mode



Enable Bookland EAN (1)



*Disable Bookland EAN (0)

Bookland ISBN Format

Parameter # 576 (SSI # F1h 40h)

If Bookland EAN is enabled, this parameter allows you to choose a format for Bookland data.

- *Bookland ISBN-10 - The scanner reports Bookland data starting with 978 in traditional 10-digit format with the special Bookland check digit for backward-compatibility. Data starting with 979 is not considered Bookland in this mode.
- Bookland ISBN-13 - The scanner reports Bookland data (starting with either 978 or 979) as EAN-13 in 13-digit format to meet the 2007 ISBN-13 protocol.




NOTE: For Bookland EAN to function properly, first enable [Bookland EAN](#) and then set [Decode UPC/EAN/JAN Supplementals](#), select one of the following options:

- Decode UPC/EAN/JAN with Supplementals Only.
- Autodiscriminate UPC/EAN/JAN With Supplementals.

- Enable 978/979 Supplemental Mode.



*Bookland ISBN-10 (0)



Bookland ISBN-13 (1)

ISSN EAN


Parameter # 617 (SSI # F1h 69h)

This parameter enables or disables the scanner to decode ISSN EAN barcodes.

- Enabled - Sets ISSN EAN for use.
- *Disabled - ISSN EAN is no longer in use.



Enable ISSN EAN (1)



*Disable ISSN EAN (0)

User-Programmable Supplementals

Parameter # 579 (SSI # F4h F1h 43h)


Parameter # 580 (SSI # F4h F1h 44h)

This parameter allows you to set two 3-digit prefixes if you have selected a Supplemental User-Programmable option.

- User-Programmable Supplemental 1 - Sets the first 3-digit prefix. See [Numeric Barcodes](#).
- User-Programmable Supplemental 2 - Sets a second 3-digit prefix, if necessary. See [Numeric Barcodes](#).



User-Programmable Supplemental 1



User-Programmable Supplemental 2

UPC/EAN/JAN Supplemental Redundancy

Parameter # 80 (SSI # 50h)

If Autodiscriminate UPC/EAN/JAN is configured to Autodiscriminate, this parameter defines the number of times a symbol is decoded without supplementals before transmission.

The range is from 2-30. Five or above is recommended when decoding a mix of UPC/EAN/JAN symbols with and without supplementals. The default is ten.

To set a redundancy value, scan the following barcode, and then scan two barcodes from [Numeric Barcodes](#). Enter a leading zero for single digit numbers. To correct an error or change a selection, scan [Cancel](#).



UPC/EAN/JAN Supplemental Redundancy

UPC/EAN/JAN Supplemental AIM ID Format

Parameter # 672 (SSI # F1h A0h)

If Transmit Code ID Character is set to **AIM Code ID Character**, select an output format when reporting UPC/EAN/JAN barcodes with supplementals.

- Separate - Transmit UPC/EAN/JAN with supplementals with separate AIM IDs but one transmission, for example,

```
]E<0 or 4><data>]E<1 or 2>[supplemental data]
```

- Combined - Transmit UPC/EAN/JAN with supplementals with one AIM ID and one transmission. For example, see below.

```
]E3<data+supplemental data>
```

- Separate Transmissions - Transmit UPC/EAN/JAN with supplementals with separate AIM IDs and separate transmissions, for example,

```
]E<0 or 4><data>
]E<1 or 2>[supplemental data]
```



Separate (0)



*Combined (1)



Separate Transmissions (2)

Transmit UPC-A Check Digit

Parameter # 40 (SSI # 28h)

This parameters transmits data with or without the UPC-A check digit.

The check digit is the last character of the symbol used to verify the integrity of the data. It is always verified to guarantee the integrity of the data.

- *Transmit UPC-A Check Digit - Transmits the data with the UPC-A check digit.
- Do Not Transmit UPC-A Check Digit - Transmits the data without the UPC-A check digit.



*Transmit UPC-A Check Digit (1)



Do Not Transmit UPC-A Check Digit (0)

Transmit UPC-E Check Digit

Parameter # 41 (SSI # 29h)


This parameters transmits data with or without the UPC-E check digit.

The check digit is the last character of the symbol used to verify the integrity of the data. It is always verified to guarantee the integrity of the data.

- *Transmit UPC-E Check Digit - transmits the data with the UPC-E check digit.
- Do Not Transmit UPC-E Check Digit - transmits the data without the UPC-E check digit.



*Transmit UPC-E Check Digit (1)



Do Not Transmit UPC-E Check Digit (0)

Transmit UPC-E1 Check Digit

Parameter # 42 (SSI #2Ah)


This parameters transmits data with or without the UPC-E1 check digit.

The check digit is the last character of the symbol used to verify the integrity of the data. It is always verified to guarantee the integrity of the data.

- *Transmit UPC-E1 Check Digit - Transmits the data with the UPC-E1 check digit.
- Do Not Transmit UPC-E1 Check Digit - Transmits the data without the UPC-E1 check digit.



*Transmit UPC-E1 Check Digit (1)



Do Not Transmit UPC-E1 Check Digit (0)

UPC-A Preamble

Parameter # 34 (SSI # 22h)

Preamble characters are part of the UPC symbol, and include Country Code and System Character.

Select the appropriate option for transmitting a UPC-A preamble to match the host system:

- Transmit System Character only

- Transmit System Character and Country Code ("0" for USA)
- Transmit no preamble.



No Preamble (<DATA>) (0)



*System Character (<SYSTEM CHARACTER>
<DATA>) (1)



System Character & Country Code (< COUNTRY
CODE> <SYSTEM CHARACTER> <DATA>) (2)

UPC-E Preamble

Parameter # 35 (SSI # 23h)

Preamble characters are part of the UPC symbol, and include Country Code and System Character.

Select the appropriate option for transmitting a UPC-E preamble to match the host system:

- Transmit System Character only
- Transmit System Character and Country Code ("0" for USA)
- Transmit no preamble.



No Preamble (<DATA>) (0)



*System Character (<SYSTEM CHARACTER>
<DATA>) (1)



System Character & Country Code (< COUNTRY CODE> <SYSTEM CHARACTER> <DATA>) (2)

UPC-E1 Preamble

Parameter # 36 (SSI # 24h)

Preamble characters are part of the UPC symbol, and include Country Code and System Character.

Select the appropriate option for transmitting a UPC-E1 preamble to match the host system:

- Transmit System Character only
- Transmit System Character and Country Code ("0" for USA)
- Transmit no preamble.



No Preamble (<DATA>) (0)



*System Character (<SYSTEM CHARACTER> <DATA>) (1)



System Character & Country Code (< COUNTRY CODE> <SYSTEM CHARACTER> <DATA>) (2)

Convert UPC-E to UPC-A

Parameter # 37 (SSI # 25h)

This parameter converts UPC-E (zero suppressed) decoded data to UPC-A format before transmission.

After conversion, the data follows UPC-A format and is affected by UPC-A programming selections (such as, Preamble, Check Digit).

- *Enabled - Converts UPC-E decoded data to UPC-A format.
- Disabled - Transmits UPC-E decoded data without conversion to UPC-A.



Convert UPC-E to UPC-A (Enable) (1)



*Do Not Convert UPC-E to UPC-A (Disable) (0)

Convert UPC-E1 to UPC-A

Parameter # 38 (SSI # 26h)

This parameter converts UPC-E1 (zero suppressed) decoded data to UPC-A format before transmission.

After conversion, the data follows UPC-A format and is affected by UPC-A programming selections (for example, Preamble, Check Digit).

- Enabled - converts UPC-E1 decoded data to UPC-A format.
- *Disabled - transmits UPC-E1 decoded data without conversion to UPC-A.



Convert UPC-E1 to UPC-A (Enable) (1)



*Do Not Convert UPC-E1 to UPC-A (Disable) (0)

EAN/JAN Zero Extend

Parameter # 39 (SSI # 27h)

This parameter enables or disables decoded EAN-8 symbols to be compatible in length with EAN-13 symbols.

- Enabled - Adds five leading zeros to decoded EAN-8 symbols to make them compatible in length to EAN-13 symbols
- Disabled - Transmits EAN-8 symbols as-is, without adding zeroes.



Enable EAN/JAN Zero Extend (1)



*Disable EAN/JAN Zero Extend (0)

Coupon Report


Parameter # 730 (SSI # F1h DAh)

This parameter selects the type of coupon format to support.

- Old Coupon Format - Support UPC-A/GS1-128 and EAN-13/GS1-128.
- New Coupon Format - An interim format to support UPC-A/GS1-DataBar and EAN-13/GS1-DataBar.
- Autodiscriminate Format - Support both Old Coupon Format and New Coupon Format.



Old Coupon Format (0)



*New Coupon Format (1)



Autodiscriminate Coupon Format (2)

UPC Reduced Quiet Zone

Parameter # 1289 (SSI # F8h 05h 09h)

This parameter enables or disables the scanner to decode the UPC barcodes with reduced quiet zones (the margins on either side of the barcode).

- Enabled - Allows the scanner to decode UPC barcodes with reduced quiet zones.
- *Disabled - Prevents the scanner from decoding UPC barcodes with reduced quiet zones.



NOTE: If you select Enable, select a [1D Quiet Zone Level](#).



Enable UPC Reduced Quiet Zone (1)



*Disable UPC Reduced Quiet Zone (0)

Linear UPC/EAN

Parameter # 68 (SSI # 44h)

This parameter determines how UPC/EAN barcodes are decoded and transmitted based on the decoding of the left and right blocks. It applies to barcode types with two adjacent blocks, such as UPC-A, EAN-8, and EAN-13.

When disabled, the left and right blocks can be decoded in different images and transmitted together.

This parameter applies to code types containing two adjacent blocks (such as UPC-A, EAN-8, and EAN-13).

- *Enabled - Requires both the left and right blocks to be decoded successfully in one image.
- Disabled - The left and right blocks can be decoded in different images.



NOTE: This is recommended when barcodes are in proximity to each other.



*Enable Linear UPC/EAN (1)



Disable Linear UPC/EAN (0)

Decode UPC/EAN/JAN Supplementals

Parameter # 16 (SSI # 10h)

This parameter decodes supplementals, which are barcodes appended according to specific format conventions (for example, UPC A+2, UPC E+2, EAN 13+2).

- Decode UPC/EAN/JAN with Supplementals Only - The scanner only decodes UPC/EAN/JAN symbols with supplemental characters, and ignores symbols without supplementals.
- Ignore UPC/EAN/JAN Supplementals - When presented with a UPC/EAN/JAN plus supplemental symbol, the scanner decodes UPC/EAN/JAN and ignores the supplemental characters.
- Autodiscriminate UPC/EAN/JAN with Supplementals - The scanner decodes UPC/EAN/JAN symbols with supplemental characters immediately. If the symbol does not have a supplemental, the scanner must decode the barcode the number of times set via [UPC/EAN/JAN Supplemental Redundancy](#) before transmitting its data to confirm that there is no supplemental.
- Enable 378/379 Supplemental Mode
- Enable 978/979 Supplemental Mode



NOTE: If you select 978/979 Supplemental Mode and are scanning Bookland EAN barcodes, see [Bookland EAN](#), and select a format using [Bookland ISBN Format](#).


- Enable 977 Supplemental Mode
- Enable 414/419/434/439 Supplemental Mode
- Enable 491 Supplemental Mode
- Enable Smart Supplemental Mode - This applies to EAN-13 barcodes starting with any prefix listed previously.
- Supplemental User-Programmable Type 1 - This applies to EAN-13 barcodes starting with a 3-digit user-defined prefix. Set this using [User Programmable Supplementals](#).
- Supplemental User-Programmable Type 1 and 2 - This applies to EAN-13 barcodes starting with either of two 3-digit user-defined prefixes. Set the prefixes using [User Programmable Supplementals](#).
- Smart Supplemental Plus User-Programmable 1 - This applies to EAN-13 barcodes starting with any prefix listed previously or the prefix set using [User Programmable Supplementals](#).
- Smart Supplemental Plus User-Programmable 1 and 2 - This applies to EAN-13 barcodes starting with any prefix listed previously or one of the two user-defined prefixes set using [User Programmable Supplementals](#).



NOTE: To minimize the risk of invalid data transmission, select either to decode or ignore supplemental characters.




Decode UPC/EAN/JAN With Supplementals
Only (1)



*Ignore UPC/EAN/JAN Supplementals (0)



Autodiscriminate UPC/EAN/JAN with Supplementals (2)



Enable 378/379 Supplemental Mode (4)



Enable 978/979 Supplemental Mode (5)



Enable 977 Supplemental Mode (7)



Enable 414/419/434/439 Supplemental Mode (6)



Enable 491 Supplemental Mode (8)



Enable Smart Supplemental Mode (3)



Supplemental User-Programmable Type 1 (9)



Supplemental User-Programmable Type 1 and 2
(10)



Smart Supplemental Plus User-Programmable 1
(11)



Smart Supplemental Plus User-Programmable 1
and 2 (12)

Code 128


Parameter # 8 (SSI #08h)

This parameter enables or disables the scanner to decode Code 128 barcodes.

- *Enabled - Enables Code 128 decoding.
- Disabled - Disables Code 128 decoding.



*Enable Code 128 (1)



Disable Code 128 (0)

Set Lengths for Code 128

Parameter # 209 (SSI #D1h)

Parameter # 210 (SSI #D2h)

This parameter sets lengths for Code 128 to any length, one or two discrete lengths, or lengths within a specific range.

The length of a code refers to the number of characters (for example, human-readable characters), including check digit(s) the code contains. The default is All Lengths.



NOTE: When setting lengths, enter a leading zero for single digit numbers.

- One Discrete Length - Decode only Code 128 symbols containing a selected length.
- Two Discrete Lengths - Decode only Code 128 symbols containing either of two lengths.
- Length Within Range - Decode Code 128 symbols with a length between 0 - 80
- Any Length - Decode Code 128 symbols containing any number of characters within the scanner's capability.

Select lengths using barcodes in [Numeric Barcodes](#). To correct an error or change the selection, scan [Cancel](#).

For example:

- To decode only Code 128 symbols with 14 characters, scan Code 128 - One Discrete Length, and then scan 1, 4.
- To decode only Code 128 symbols containing either 2 or 14 characters, scan Code 128 - Two Discrete Lengths, and then scan 0, 2, 1, 4.
- To decode Code 128 symbols containing between 4 and 12 characters, scan Code 128 - Length Within Range, and then scan 0, 4, 1, 2.



Code 128 - One Discrete Length



Code 128 - Two Discrete Lengths



Code 128 - Length Within Range (Default: 0 - 80)




*Code 128 - All Lengths

GS1-128 (formerly UCC/EAN-128)

Parameter # 14 (SSI #0Eh)

This parameter enables or disables the scanner to decode GS1-128 barcodes.

- Enabled - Enables GS1-128 decoding.
- Disabled - Disables GS1-128 decoding.



*Enable GS1-128 (1)



Disable GS1-128 (0)

ISBT 128

Parameter # 84 (SSI #54h)


This parameter enables or disables the scanner to decode ISBT 128 barcodes.

- *Enabled - enables ISBT 128 decoding.
- Disabled - disables ISBT 128 decoding.

ISBT 128 is a variant of Code 128 used in the blood bank industry.



*Enable ISBT 128 (1)



Disable ISBT 128 (0)

ISBT Concatenation

Parameter # 577 (SSI #F1h 41h)

This parameter enables or disables the scanner to decode ISBT concatenation.

Select an option for concatenating pairs of ISBT code types:

- Enable ISBT Concatenation - The scanner decodes and concatenates two ISBT codes. The scanner does not decode single ISBT symbols.
- Disable ISBT Concatenation - The scanner does not concatenate pairs of ISBT codes it encounters.
- Autodiscriminate ISBT Concatenation - The scanner decodes and concatenates pairs of ISBT codes immediately. If only a single ISBT symbol is present, the scanner must decode the symbol the number of times set via [ISBT Concatenation Redundancy](#) before transmitting its data to confirm that there is no additional ISBT symbol.



NOTE: For ISBT AutoDetect to operate as expected, both barcodes must be in the field of view simultaneously. This may be difficult to achieve in presentation mode.



NOTE: When enabling ISBT Concatenation or Autodiscriminate ISBT Concatenation, set Code 128 Security Level to Level 2.



Enable ISBT Concatenation (1)



*Disable ISBT Concatenation (0)



Autodiscriminate ISBT Concatenation (2)

Check ISBT Table

Parameter # 578 (SSI #F1h 42h)

This parameter enables or disables the Check ISBT Table which concatenates only pairs of ISBT codes found in the table. Other types of ISBT codes are not concatenated.

- *Enabled - enables the Check ISBT Table to concatenate only those pairs found in this table.
- Disabled - disables the Check ISBT Table to concatenate only those pairs found in this table.

The ISBT specification includes a table that lists several types of ISBT barcodes that are commonly used in pairs.



*Enable Check ISBT Table (1)



Disable Check ISBT Table (0)

ISBT Concatenation Redundancy

Parameter # 223 (SSI #DFh)

This parameter sets the number of times the scanner must decode an ISBT symbol before determining that there is no additional symbol.

This parameter applies if you set ISBT Concatenation to Autodiscriminate.

Scan the following barcode, and then scan barcodes in [Numeric Barcodes](#) to set a value between the range: 2 and 20. Enter a leading zero for single-digit numbers. To correct an error or change a selection, scan [Cancel](#). The default is 10.




ISBT Concatenation Redundancy

Code 128 <FNC4>


Parameter # 1254 (SSI #F8h 04h E6h)

This parameter processes the Code 128 <FNC4> character, and either ignores (removes) the character or honors (does not remove) the character.

- *Honor Code 128 <FNC4> - The <FNC4> character is processed normally, per Code 128 standard.
- Ignore Code 128 <FNC4> - Strips the <FNC4> character from the decode data. The remaining characters are sent to the host unchanged.



*Honor Code 128 <FNC4> (0)



Ignore Code 128 <FNC4> (1)

Code 128 Security Level

Parameter # 751 (SSI #F1h EFh)

This parameter enables four levels of decode security for Code 128.

Code 128 barcodes are vulnerable to misdecodes, particularly when Code 128 Lengths is set to Any Length. There is an inverse relationship between security and scanner aggressiveness. Increasing the level of security can reduce scanning aggressiveness, so select only the level of security necessary.

- Code 128 Security Level 0 - The scanner operates in its most aggressive state, while providing sufficient security in decoding most in-spec barcodes.
- Code 128 Security Level 1 - This option eliminates most misdecodes while maintaining reasonable aggressiveness.
- Code 128 Security Level 2 - This option applies greater barcode security requirements if Security Level 1 fails to eliminate misdecodes.
- Code 128 Security Level 3 - If you selected Security Level 2, and misdecodes still occur, select this security level to apply the highest safety requirements.



NOTE: Selecting Code 128 Security Level 3 is an extreme measure against mis-decoding severely out-of-spec barcodes, and significantly impairs the decoding ability of the device. If this level of security is required, try to improve the quality of the barcodes.



Code 128 Security Level 0 (0)



*Code 128 Security Level 1 (1)



Code 128 Security Level 2 (2)



Code 128 Security Level 3 (3)

Code 128 Reduced Quiet Zone

Parameter # 1208 (SSI #F8h 04h B8h)


This parameter enables or disables decoding Code 128 with reduced quiet zones (the margins on either side of the barcode).

If you select Enable, select a [1D Quiet Zone Level](#).

- Enabled - enables Code 128 with reduced Quiet Zones.
- *Disabled - disables Code 128 with reduced Quiet Zones.



Enable Code 128 Reduced Quiet Zone (1)




*Disable Code 128 Reduced Quiet Zone (0)

Code 39

Parameter # 0 (SSI #00h)

This parameter enables or disables the scanner to decode Code 39 barcodes.

- *Enabled - Enables Code 39 decoding.
- Disabled - Disables Code 39 decoding.



*Enable Code 39 (1)



Disable Code 39 (0)

Convert Code 39 to Code 32

Parameter # 86 (SSI #5h)

This parameter enables or disables converting Code 39 to Code 32.

Code 32 is a variant of Code 39 used by the Italian pharmaceutical industry.



NOTE: Code 39 must be enabled for this parameter to function.

- Enabled - enables Convert Code 39 to Code 32.
- *Disabled - disables Convert Code 39 to Code 32.



Enable Convert Code 39 to Code 32 (1)



*Disable Convert Code 39 to Code 32 (0)

Code 32 Prefix

Parameter # 231 (SSI #E7h)

This parameter enables or disables adding the prefix character "A" to all Code 32 barcodes.

- Enabled - enables Code 32 Prefix.
- *Disabled - disables Code 32 Prefix.



NOTE: [Convert Code 39 to 32](#) must be enabled for this parameter to function.



Enable Code 32 Prefix (1)



*Disable Code 32 Prefix (0)

Set Lengths for Code 39

L1 Parameter # 18 (SSI #12h)

L2 Parameter # 19 (SSI #13h)

This parameter sets the lengths for Code 39.

The length of a code refers to the number of characters (for example, human readable characters), including check digit(s) the code contains.

The options are:

- Any length
- One or two discrete lengths
- Lengths within a specific range

If Code 39 Full ASCII is enabled, Length Within Range or Any Length are the preferred options. The default behavior is Length Within Range, with a default value of 1 - 55.



NOTE: When setting the lengths, enter a leading zero for single digit numbers.

- One Discrete Length - Decode only Code 39 symbols containing a selected length.
- Two Discrete Lengths - Decode only Code 39 symbols containing either of two lengths.
- Length Within Range - Decode Code 39 symbols with a specific length range.
- Any Length - Decode Code 39 symbols containing any number of characters within the scanner's capability.

Select lengths using barcodes in [Numeric Barcodes](#). To correct an error or change the selection, scan [Cancel](#).

For example:

- To decode only Code 39 symbols with 14 characters, scan Code 39 - One Discrete Length, and then scan 1, 4.
- To decode only Code 39 symbols containing either 2 or 14 characters, scan Code 39 - Two Discrete Lengths, and then scan 0, 2, 1, 4.
- To decode Code 39 symbols containing between 4 and 12 characters, scan Code 39 - Length Within Range, and then scan 0, 4, 1, 2.



Code 39 - One Discrete Length



Code 39 - Two Discrete Lengths



*Code 39 - Length Within Range (Default: 1 - 55)



Code 39 - Any Length

Code 39 Check Digit Verification

Parameter # 48 (SSI #30h)

This parameter checks the integrity of all Code 39 symbols to verify that the data complies with specified check digit algorithm.

Only Code 39 symbols which include a modulo 43 check digit are decoded. Enable this parameter if the Code 39 symbols contain a Modulo 43 check digit.

- Enabled - enables Code 39 Check Digit.
- *Disabled - disables Code 39 Check Digit.



Enable Code 39 Check Digit (1)



*Disable Code 39 Check Digit (0)

Transmit Code 39 Check Digit

Parameter # 43 (SSI #2Bh)

This parameter transmits Code 39 data with or without the check digit.


- Enabled - enables Transmit Code 39 Check Digit.
- *Disabled - disables Transmit Code 39 Check Digit.



NOTE: [Code 39 Check Digit Verification](#) must be enabled for this parameter to function.



Transmit Code 39 Check Digit (Enable) (1)



*Do Not Transmit Code 39 Check Digit (Disable) (0)

Code 39 Full ASCII Conversion

Parameter # 17 (SSI #11h)

This parameter enables or disables the scanner to decode Code 39 Full ASCII.

Code 39 Full ASCII is a variant of Code 39 which pairs characters to encode the full ASCII character set.

- Enabled - enables Code 39 Full ASCII.
- *Disabled - disables Code 39 Full ASCII.



NOTE: Code 39 Full ASCII to Full ASCII Correlation is host-dependent, and is therefore described in the ASCII character set table for the appropriate interface. See [ASCII Character Sets](#).



Enable Code 39 Full ASCII (1)



*Disable Code 39 Full ASCII (0)

Code 39 Security Level

Parameter # 750 (SSI #F1h EEh)

This parameter sets the security level for Code 39.

Select increasing levels of security for decreasing levels of barcode quality. There is an inverse relationship between security, and device aggressiveness, so choose only that level of security necessary for any given application.

- Code 39 Security Level 0 - Allows the device to operate in its most aggressive state, while providing sufficient security in decoding most "in-spec" barcodes.
- *Code 39 Security Level 1 - This setting eliminates most mis-decodes
- Code 39 Security Level 2 - Select this option if Security Level 1 fails to eliminate mis-decodes.
- Code 39 Security Level 3 - If you selected Security Level 2 and mis-decodes still occur, select this security level.



NOTE: Selecting Security Level 3 is an extreme measure against mis-decoding severely out of spec barcodes. Selecting this level of security significantly impairs the decoding ability of the device. If you need this level of security, try to improve the quality of the barcodes.



Code 39 Security Level 0 (0)



*Code 39 Security Level 1 (1)



Code 39 Security Level 2 (2)




Code 39 Security Level 3 (3)

Code 39 Stitching


Parameter # 70 (SSI #46h)

This parameter enables or disables stitching Code 39 data.

- *Enabled - enables Code 39 stitching to help decode longer codes.
- Disabled - disables Code 39 stitching.



Enable Code 39 Stitching (1)



*Disable Code 39 Stitching (0)

Code 39 Stitching Security Level

Parameter # 1206 (SSI #F8h 04h B6h)

This parameter sets the stitching security level for Code 39.

Select increasing levels of security for decreasing levels of barcode quality. There is an inverse relationship between security and device aggressiveness, so choose the security level necessary for any given application.

- Security Level 0 - This default setting allows the device to operate in its most aggressive state, while providing sufficient security in decoding most "in-spec" barcodes.
- *Security Level 1 - This setting eliminates most mis-decodes
- Security Level 2 - Select this option if Security Level 1 fails to eliminate mis-decodes.
- Security Level 3 - Select this security level if Security Level 2 fails to eliminate mis-codes.



NOTE: Selecting Security Level 3 is an extreme measure against mis-decoding severely out of spec barcodes. Selecting this level of security significantly reduces the decoding ability of the device. If you need this level of security, consider improving the quality of the barcodes.



Level 0 (0)



Level 2 (2)



*Level 1 (1)



Level 3 (3)

Code 39 Reduced Quiet Zone

Parameter # 1209 (SSI #F8h 04h B9h)

This parameter enables or disables decoding Code 39 with reduced quiet zones. Quiet zones are the margins on either side of the barcode.

If you select Enable, select a [1D Quiet Zone Level](#).

- Enabled - enables Code 39 with reduced Quiet Zones.
- *Disabled - disables Code 39 with reduced Quiet Zones.



Enable Code 39 Reduced Quiet Zone (1)




*Disable Code 39 Reduced Quiet Zone (0)

Transmit Code 39 Start/Stop Characters

Parameter # 1900 (SSI # F8 07 6Ch)

This parameter selects whether the scanner transmits the start and stop characters for Code 39 barcodes.



*Disable Transmit Code 39 Start/Stop Characters
(0)



Enable Transmit Code 39 Start/Stop Characters
(1)

Code 93


Parameter # 9 (SSI #09h)

This parameter enables or disables the scanner to decode Code 93 barcodes.

- *Enabled - enables Code 93 decoding.
- Disabled - disables Code 93 decoding.



*Enable Code 93 (1)



Disable Code 93 (0)

Set Lengths for Code 93

Parameter # 26 (SSI #1Ah)

Parameter # 27 (SSI #1Bh)

This parameter sets the lengths for Code 93 to any length, one or two discrete lengths, or lengths within a specific range.

The length of a code refers to the number of characters (for example, human-readable characters), including check digit(s) the code contains.

The options are:

- Any length
- One or two discrete lengths

- Lengths within a specific range

The default behavior is 1 to 55, with a default value of 0 to 80 digits.



NOTE: When setting the lengths, enter a leading zero for single-digit numbers.

Scan one of the following barcodes to select a length option:

- One Discrete Length - Decode only Code 93 symbols containing a selected length.
- Two Discrete Lengths - Decode only Code 93 symbols containing either of two lengths.
- Length Within Range - Decode Code 93 symbols with a specific length range.
- Any Length - Decode Code 93 symbols containing any number of characters within the scanner's capability.

Select lengths using barcodes in [Numeric Barcodes](#). To correct an error or change the selection, scan [Cancel](#).

For example:

- To decode only Code 93 symbols with 14 characters, scan Code 93 - One Discrete Length, and then scan 1, 4.
- To decode only Code 93 symbols containing either 2 or 14 characters, scan Code 93 - Two Discrete Lengths, and then scan 0, 2, 1, 4.
- To decode Code 93 symbols containing between 4 and 12 characters, scan Code 93 - Length Within Range, and then scan 0, 4, 1, 2.



Code 93 - One Discrete Length



Code 93 - Two Discrete Lengths



*Code 93 - Length Within Range (Default: 1 to 55)



Code 93 - Any Length

Interleaved 2 of 5 (I 2 of 5)

Parameter # 6 (SSI #06h)

This parameter enables or disables the scanner to decode I 2 of 5 barcodes.

- Enabled - enables I 2 of 5 decoding.
- Disabled - disables I 2 of 5 decoding.



*Enable Interleaved 2 of 5 (1)



Disable Interleaved 2 of 5 (0)

Set Lengths for Interleaved 2 of 5 (I 2 of 5)

L1 Parameter # 22 (SSI #16h)

L2 Parameter # 23 (SSI #17h)

This parameter sets the length for I 2 of 5.

The length of a code refers to the number of characters (for example, human-readable characters), including check digit(s) the code contains.

The default behavior is Length Within Range, with a default value of 6 to 55 .



NOTE: When setting the lengths, enter a leading zero for single digit numbers.

- One Discrete Length - Decode only I 2 of 5 symbols containing a selected length.
- Two Discrete Lengths - Decode only I 2 of 5 symbols containing either of two lengths.
- Length Within Range - Decode I 2 of 5 symbols with a specific length range.
- Any Length - Decode I 2 of 5 symbols containing any number of characters within the scanner's capability.



NOTE: Due to the construction of the I 2 of 5 symbology, it is possible for a scan line covering only a portion of the code to transmit as a complete scan, yielding less data than is encoded in the barcode. To prevent this, select specific lengths (I 2 of 5 - One Discrete Length, Two Discrete Lengths) for I 2 of 5 applications, or increase the [Security Level](#).

Select barcode length in [Numeric Barcodes](#). To correct an error or change the selection, scan [Cancel](#).


For example:

- To decode only I 2 of 5 symbols with 14 characters, scan I 2 of 5 - One Discrete Length, and then scan 1, 4.

- To decode only 1 2 of 5 symbols containing either 2 or 14 characters, scan 1 2 of 5 - Two Discrete Lengths, and then scan 0, 2, 1, 4.
- To decode 1 2 of 5 symbols containing between 4 and 12 characters, scan 1 2 of 5 - Length Within Range, and then scan 0, 4, 1, 2.



1 2 of 5 - One Discrete Length



1 2 of 5 - Two Discrete Lengths



*1 2 of 5 - Length Within Range



1 2 of 5 - Any Length

Interleaved 2 of 5 (1 2 of 5) Check Digit Verification


Parameter # 49 (SSI #31h)

This parameter enables or disables checking the integrity of all 1 2 of 5 symbols to verify the data complies with either the specified Uniform Symbology Specification (USS) or the Optical Product Code Council (OPCC) check digit algorithm.

- *Disable - disables checking the integrity of all 1 2 of 5 symbols to verify the data complies.
- USS Check Digit - enables checking the integrity of USS.
- OPCC Check Digit - enables checking the integrity of OPCC.



*Disable (0)



USS Check Digit (1)




OPCC Check Digit (2)

Transmit I 2 of 5 Check Digit

Parameter # 44 (SSI #2Ch)

This parameter enables or disables transmission of I 2 of 5 data with or without the check digit.

- Enabled - enables transmission of check digit.
- *Disabled - disables transmission of check digit.



Transmit I 2 of 5 Check Digit (Enable) (1)



*Do Not Transmit I 2 of 5 Check Digit (Disable) (0)

Convert Interleaved 2 of 5 (I 2 of 5) to EAN-13

Parameter # 82 (SSI #52h)

This parameter enables or disables converting 14-character I 2 of 5 codes to EAN-13, and then transmitting to the host as EAN-13.

- Enabled - converts 14-character I 2 of 5 codes to EAN-13.
- *Disabled - does not convert 14-character I 2 of 5 codes to EAN-13.



NOTE: The I 2 of 5 code must be enabled, and the code must have a leading zero and a valid EAN-13 check digit.



Convert I 2 of 5 to EAN-13 (Enable) (1)



*Do Not Convert I 2 of 5 to EAN-13 (Disable) (0)

Febraban

Parameter # 1750 (SSI #F8h 06h D6h)

This parameter enables or disables the I 2 of 5 internal check digit calculation and transmission.


Febraban is an Interleaved 2 of 5 (I 2 of 5) barcode with a length of 44 that requires that requires inserting special check characters in the transmitted data stream.

- Enabled - enables internal check of digit calculation and transmission.
- *Disabled - disables internal check of digit calculation and transmission.



NOTE: Recommendations for length settings:

- I 2 of 5 Length 1: Larger of the fixed length and the Febraban length (==44).
- I 2 of 5 Length 2: Smaller of the fixed length and the Febraban length (==44).



Enable Febraban (1)



*Disable Febraban (0)

Interleaved 2 of 5 (I 2 of 5) Security Level

Parameter # 1121 (SSI #F8h 04h 61h)

This parameter sets the security level for I 2 of 5.

I 2 of 5 barcodes are vulnerable to misdecodes, particularly when I 2 of 5 Lengths is set to Any Length. The scanner offers four levels of decode security for I 2 of 5 barcodes. There is an inverse relationship between security and scanner aggressiveness. Increasing the level of security can reduce scanning aggressiveness, so select only the level of security necessary.

- I 2 of 5 Security Level 0: The scanner operates in its most aggressive state, while providing sufficient security in decoding most in-spec barcodes.
- I 2 of 5 Security Level 1: A barcode must be successfully read twice, and satisfy certain safety requirements before being decoded. This default setting eliminates most misdecodes.
- I 2 of 5 Security Level 2: This option applies greater barcode security requirements if Security Level 1 fails to eliminate misdecodes.

- I 2 of 5 Security Level 3: If you selected Security Level 2, and misdecodes still occur, select this security level. The highest safety requirements are applied. A barcode must be successfully read three times before being decoded.



NOTE: Selecting this option is an extreme measure against mis-decoding severely out-of-spec barcodes, and significantly impairs the decoding ability of the scanner. If this level of security is required, try to improve the quality of the barcodes.



I 2 of 5 Security Level 0 (0)



*I 2 of 5 Security Level 1 (1)



I 2 of 5 Security Level 2 (2)



I 2 of 5 Security Level 3 (3)


Interleaved 2 of 5 (I 2 of 5) Reduced Quiet Zone

Parameter # 1210 (SSI #F8h 04h B9h)

This parameter enables or disables decoding I 2 of 5 with reduced quiet zones (the margins on either side of the barcode).

If you select Enable, select a [1D Quiet Zone Level](#).

- Enabled - enables I 2 of 5 with reduced Quiet Zones.
- *Disabled - disables I 2 of 5 with reduced Quiet Zones.



Enable I 2 of 5 Reduced Quiet Zone (1)



*Disable I 2 of 5 Reduced Quiet Zone (0)

Discrete 2 of 5 (D 2 of 5)

Parameter # 5 (SSI #05h)

This parameter enables or disables the scanner to decode D 2 of 5 barcodes.

- Enabled - enables D 2 of 5 decoding.
- *Disabled - disables D 2 of 5 decoding.



Enable Discrete 2 of 5 (1)



*Disable Discrete 2 of 5 (0)

Set Lengths for Discrete 2 of 5 (D 2 of 5)

L1 Parameter # 20 (SSI #14h)

L2 Parameter # 21 (SSI #15h)

This parameter sets the lengths for D 2 of 5.

The length of a code refers to the number of characters (for example, human-readable characters), including check digit(s) the code contains.

The options are:

- Any length
- One or Two discrete lengths
- Lengths within a specific range

The default behavior is lengths within a specific range , with a default range of 1 to 55.



NOTE: When setting the lengths, enter a leading zero for single digit numbers.

Scan one of the following barcodes to select a length option:

- One Discrete Length - Decode only D 2 of 5 symbols containing a selected length.
- Two Discrete Lengths - Decode only D 2 of 5 symbols containing either of two lengths.
- *Length Within Range - Decode D 2 of 5 symbols with a specific length range.

- Any Length - Decode D 2 of 5 symbols containing any number of characters within the scanner's capability.



NOTE: Due to the construction of the D 2 of 5 symbology, it is possible for a scan line covering only a portion of the code to transmit as a complete scan, yielding less data than is encoded in the barcode. To prevent this, select specific lengths (D 2 of 5 - One Discrete Length, Two Discrete Lengths) for D 2 of 5 applications.


Select lengths using barcodes in [Numeric Barcodes](#). To correct an error or change the selection, scan [Cancel](#).

For example:

- To decode only D 2 of 5 symbols with 14 characters, scan D 2 of 5 - One Discrete Length, and then scan 1, 4.
- To decode only D 2 of 5 symbols containing either 2 or 14 characters, scan D 2 of 5 - Two Discrete Lengths, and then scan 0, 2, 1, 4.
- To decode D 2 of 5 symbols containing between 4 and 12 characters, scan D 2 of 5 - Length Within Range, and then scan 0, 4, 1, 2.



D 2 of 5 - One Discrete Length



D 2 of 5 - Two Discrete Lengths



*D 2 of 5 - Length Within Range



D 2 of 5 - Any Length

Codabar (NW - 7)

Parameter # 7 (SSI #07h)

This parameter enables or disables the scanner to decode Codabar barcodes.

- *Enabled - enables Codabar decoding.
- Disabled - disables Codabar decoding.



*Enable Codabar (1)



Disable Codabar (0)

Set Lengths for Codabar

L1 Parameter # 24 (SSI #18h)

L2 Parameter # 25 (SSI #19h)

This parameter sets lengths for Codabar.

The length of a code refers to the number of characters (for example, human-readable characters), including check digit(s) the code contains. Set lengths for Codabar to any length, one or two discrete lengths, or lengths within a specific range. The default behavior is 4 to 55 , and the range is 0 to 60



NOTE: When setting lengths, enter a leading zero for single-digit numbers.

- One Discrete Length - Decode only Codabar symbols containing a selected length.
- Two Discrete Lengths - Decode only Codabar symbols containing either of two lengths.
- Length Within Range - Decode Codabar symbols with a specific length range.
- Any Length - Decode Codabar symbols containing any number of characters within the scanner's capability.

Select lengths using barcodes in [Numeric Barcodes](#). To correct an error or change the selection, scan [Cancel](#).

For example:

- To decode only Codabar symbols with 14 characters, scan Codabar - One Discrete Length, and then scan 1, 4.
- To decode only Codabar symbols containing either 2 or 14 characters, scan Codabar - Two Discrete Lengths, and then scan 0, 2, 1, 4.
- To decode Codabar symbols containing between 4 and 12 characters, scan Codabar - Length Within Range, and then scan 0, 4, 1, 2.



Codabar - One Discrete Length



Codabar - Two Discrete Lengths



*Codabar - Length Within Range (Default: 4 to 55)



Codabar - Any Length

CLSI Editing

Parameter # 54 (SSI #36h)


This parameter enables or disables the scanner to decode CLSI editing barcodes.

Select Enable CLSI Editing to strip the start and stop characters and insert a space after the first, fifth, and tenth characters of a 14-character Codabar symbol if the host system requires this data format.

- Enabled - enables CLSI editing.
- *Disabled - disables CLSI editing.



NOTE: Symbol length does not include start and stop characters.



Enable CLSI Editing (1)



*Disable CLSI Editing (0)

NOTIS Editing

Parameter # 55 (SSI #37h)

This parameter enables or disables the scanner to decode NOTIS editing barcodes, which strips the start and stop characters from a decoded Codabar symbol if the host system requires this data format.

- Enabled - enables NOTIS editing.
- *Disabled - disables NOTIS editing.



Enable NOTIS Editing (1)



*Disable NOTIS Editing (0)

Codabar Security Level

Parameter # 1776 (SSI #F8h 06h F0h)

This parameter sets the security level for Codabar 39.

The scanner offers four levels of decode security for Codabar barcodes. There is an inverse relationship between security and scanner aggressiveness. Increasing the security level can reduce scanning aggressiveness, so select only the level of security necessary.


- Codabar Security Level 0: This setting allows the scanner to operate in its most aggressive state, while providing sufficient security in decoding most in-spec barcodes.
- Codabar Security Level 1: This default setting eliminates most misdecodes.
- Codabar Security Level 2: Select this option with greater barcode security requirements if Security Level 1 fails to eliminate misdecodes.
- Codabar Security Level 3: Select this security level if Security Level 2 fails to eliminate mis-codes.



NOTE: Selecting this option is an extreme measure against mis-decoding severely out-of-spec barcodes, and significantly reduces the decoding ability of the scanner. If this level of security is required, consider improving the quality of the barcodes.



NOTE: Selecting this option is an extreme measure against mis-decoding severely out-of-spec barcodes, and significantly impairs the decoding ability of the scanner. If this level of security is required, try to improve the quality of the barcodes.



Codabar Security Level 0 (0)



*Codabar Security Level 1 (1)



Codabar Security Level 2 (2)



Codabar Security Level 3 (3)

Codabar Upper or Lower Case Start/Stop Characters

Parameter # 855 (SSI #F2h 57h)

This parameter selects whether to transmit upper case or lower case Codabar start/stop characters.

- Lower Case (1) - enables lowercase start/stop characters.
- *Upper Case (0) - enables upper case start/stop characters.



Lower Case (1)



*Upper Case (0)

Codabar Mod 16 Check Digit Verification

Parameter # 1784 (SSI #F8h 06h F8h)

This parameter verifies the Codabar Mod 16 check digit to ensure the data complies with the specified check digit algorithm.

- Enabled - enables check digit.
- *Disabled - disables check digit.



Enable Codabar Mod 16 Check digit (1)



*Disable Codabar Mod 16 Check digit (0)

Transmit Codabar Check Digit


Parameter # 704 (SSI #F1h C0h)

This parameter selects whether or not to transmit the Codabar check digit(s).

- Enabled - enables check digit transmission.
- *Disabled - disables check digit transmission.



Enable Codabar Check Digit Transmission (1)



*Disable Codabar Check Digit Transmission (0)

MSI

Parameter # 11 (SSI #0Bh)

This parameter enables or disables the scanner to decode MSI barcodes.

- Enabled - enables MSI decoding.
- *Disabled - disables MSI decoding.



Enable MSI (1)



*Disable MSI (0)

Set Lengths for MSI

L1 Parameter # 30 (SSI #1Eh)

L2 Parameter # 31 (SSI #1Fh)

This parameter sets the lengths for MSI.

The length of a code refers to the number of characters (for example, human-readable characters), including check digit(s) the code contains.

The options are:

- Any length
- One or two discrete lengths
- Lengths within a specific range

The default behavior is 4 to 55, with a default value of 0 to 55.



NOTE: When setting the lengths, enter a leading zero for single-digit numbers.

Scan one of the following barcodes to select a length option:

- One Discrete Length - Decode only MSI symbols containing a selected length.
- Two Discrete Lengths - Decode only MSI symbols containing either of two lengths.
- Length Within Range - Decode MSI symbols with a specific length range.
- Any Length - Decode MSI symbols containing any number of characters within the scanner's capability.



NOTE: Due to the construction of the MSI symbology, it is possible for a scan line covering only a portion of the code to transmit as a complete scan, yielding less data than is encoded in the barcode. To prevent this, select specific lengths (MSI - One Discrete Length, Two Discrete Lengths) for MSI applications.


Select lengths using barcodes in [Numeric Barcodes](#). To correct an error or change the selection, scan [Cancel](#).

For example:

- To decode only MSI symbols with 14 characters, scan MSI - One Discrete Length, and then scan 1, 4.
- To decode only MSI symbols containing either 2 or 14 characters, scan MSI - Two Discrete Lengths, and then scan 0, 2, 1, 4.
- To decode MSI symbols containing between 4 and 12 characters, scan MSI - Length Within Range, and then scan 0, 4, 1, 2.



MSI - One Discrete Length



MSI - Two Discrete Lengths



*MSI - Length Within Range (Default: 4 to 55)



MSI - Any Length

MSI Check Digits

Parameter # 50 (SSI #32h)

This parameter checks the MSI check digit to verify that the data complies with the specified check digit algorithm.

With MSI symbols, one check digit is mandatory and always verified by the reader. The second check digit is optional. If the MSI codes include two check digits, select the Two MSI Check Digits option to enable verification of the second check digit.

- 0 - Does not check the MSI check digit; decodes MSI with no check digit.
- 1 - This is for MSI barcodes with one check digit. This is the default.
- 2 - This is for MSI barcodes with two check digits.

[MSI Check Digit Algorithm](#) to select second digit algorithms.



No MSI Check Digit (0)



*One MSI Check Digits (1)



Two MSI Check Digit (2)

Transmit MSI Check Digit(s)

Parameter # 46 (SSI #2Eh)

This parameter transmits MSI data with or without the check digit.

- Enabled - transmits MSI data with check digit.
- *Disabled - does not transmit MSI data check digit.



Transmit MSI Check Digit(s) (Enable) (1)



*Do Not Transmit MSI Check Digit(s) (Disable) (0)

MSI Check Digit Algorithm

Parameter # 51 (SSI #33h)

This parameter selects the algorithm used to encode the check digit.

Two algorithms are available for verifying the second MSI check digit. Select one of the following options to select the algorithm used to encode the check digit.



MOD 11/MOD 10 (0)



*MOD 10/MOD 10 (1)

MSI Reduced Quiet Zone

Parameter # 1392 (SSI #F8h 05h 70h)


This parameter enables or disables decoding MSI with reduced quiet zones (the margins on either side of the barcode).

If you select Enable, select a [1D Quiet Zone Level](#).

- *Disabled - disables MSI with reduced Quiet Zones.
- Enabled - enables MSI with reduced Quiet Zones.



*Disable MSI Reduced Quiet Zone (0)



Enable MSI Reduced Quiet Zone (1)

MSI Security Level

Parameter # 2122 (SSI # F8 08 4A)

The digital scanner offers four levels of decode security for MSI bar codes. There is an inverse relationship between security and digital scanner aggressiveness. Increasing the level of security can reduce scanning aggressiveness, so select only the security level necessary.

- MSI Security Level 0: This option allows the digital scanner to operate in its most aggressive state, while providing sufficient security in decoding most in-spec bar codes.
- *MSI Security Level 1: This default option eliminates most misdecodes.
- MSI Security Level 2: Select this option to provide greater barcode security requirements if Security Level 1 fails to eliminate misdecodes.
- MSI Security Level 3: Select this option to apply the highest safety requirements, if mis-decode occurs with Security Level 2.



NOTE: Selecting this option is an extreme measure against mis-decoding severely out-of-spec bar codes, and significantly reduces the decoding ability of the digital scanner. If this level of security is required, consider improving the quality of the bar codes.



Security Level 0 (0)



*Security Level 1 (1)



Security Level 2 (2)



Security Level (3)

Chinese 2 of 5

Parameter # 408 (SSI #98h)

This parameter enables or disables the scanner to decode Chinese 2 of 5.

- Enabled - enables Chinese 2 of 5.
- *Disabled - disables Chinese 2 of 5.



Enable Chinese 2 of 5 (1)



*Disable Chinese 2 of 5 (0)

Korean 3 of 5

Parameter # 581 (SSI #F1h 45h)

This parameter enables or disables to decode Korean 3 of 5 barcodes.

- Enabled - enables decoding Korean 3 of 5 barcodes.
- *Disabled - disables decoding Korean 3 of 5 barcodes.



NOTE: The length for Korean 3 of 5 is fixed at 6.



Enable Korean 3 of 5 (1)



*Disable Korean 3 of 5 (0)

Inverse 1D

Parameter # 586 (SSI #F1h 4Ah)

This parameter configures the 1D inverse decoder setting.

- Regular Only - The scanner decodes regular 1D barcodes only.
- Inverse Only - The scanner decodes inverse 1D barcodes only.
- Inverse Autodetect - The scanner decodes both regular and inverse 1D barcodes.



NOTE: This parameter does not apply to GS1 DataBarcode types.



NOTE: The Inverse 1D setting may impact Composite or Inverse Composite decoding.



*Regular Only (0)



Inverse Only (1)



Inverse Autodetect (2)

GS1 DataBar Omnidirectional (formerly GS1 DataBar-14)

The variants of GS1 DataBar are DataBar Omnidirectional, DataBar Limited, and DataBar Expanded. The limited and expanded versions have stacked variants. Scan the appropriate barcodes to enable or disable each variant of GS1 DataBar.

Parameter # 338 (SSI #F0h 52h)

This parameter enables or disables the scanner to decode GS1 DataBar Omnidirectional barcodes.

- *Enabled - enables GS1 DataBar Omnidirectional decoding.
- Disabled - disables GS1 DataBar Omnidirectional decoding.



*Enable GS1 DataBar Omnidirectional (1)



Disable GS1 DataBar Omnidirectional (0)

GS1 DataBar Limited

Parameter # 339 (SSI #F0h 53h)

This parameter enables or disables the scanner to decode GS1 DataBar Limited barcodes.

- *Enabled - enables GS1 DataBar Limited decoding.
- Disabled - disables GS1 DataBar Limited decoding.



*Enable GS1 DataBar Limited (1)




Disable GS1 DataBar Limited (0)

GS1 DataBar Expanded

Parameter # 340 (SSI #F0h 54h)

This parameter enables or disables the scanner to decode GS1 DataBar Expanded barcodes.

- *Enabled - enables GS1 DataBar Expanded decoding.
- Disabled - disables GS1 DataBar Expanded decoding.



*Enable GS1 DataBar Expanded (1)



Disable GS1 DataBar Expanded (0)

Convert GS1 DataBar to UPC/EAN/JAN

Parameter # 397 (SSI #F0h, 8Dh)

This parameter enables or disables the scanner to decode Convert GS1 DataBar to UPC/EAN/JAN.

- Enabled - Converts GS1 DataBar to UPC/EAN/JAN.
- *Disabled - Does not convert GS1 DataBar to UPC/EAN/JAN.

This parameter only applies to GS1 DataBar Omnidirectional and GS1 DataBar Limited symbols not decoded as part of a Composite symbol. Enable Convert GS1 DataBar to UPC/EAN/JAN strips the leading '010' from DataBar Omnidirectional and DataBar Limited symbols encoding a single zero as the first digit, and then reports as EAN-13.

For barcodes beginning with two to five zeros, this strips the leading '0100' and reports the barcode as UPC-A. The [UPC-A Preamble](#) option that transmits the system character and country code applies to converted barcodes. Note that neither the system character nor the check digit can be stripped.



Enable Convert GS1 DataBar to UPC/EAN/JAN
(1)



*Disable Convert GS1 DataBar to UPC/EAN/JAN
(0)

GS1 DataBar Security Level

Parameter # 1706 (SSI #F8h 06h AAh)

This parameter sets the security level for GS1 DataBar.


The scanner offers four levels of decode security for GS1 DataBar (GS1 DataBar Omnidirectional, GS1 DataBar Limited, GS1 DataBar Expanded) barcodes.

- Security Level 0 - The scanner operates in its most aggressive state, while providing sufficient security decoding most in-spec barcodes.
- *Security Level 1 - This setting eliminates most misdecodes while maintaining reasonable aggressiveness.
- Security Level 2 - Select this option with greater barcode security requirements if Security Level 1 fails to eliminate misdecodes.

- Security Level 3 - If you selected Security Level 2 and misdecodes still occur, select this security level to apply the highest safety requirements.




GS1 DataBar Security Level 0 (0)



*GS1 DataBar Security Level 1 (1)



GS1 DataBar Security Level 2 (2)



GS1 DataBar Security Level 3 (3)

GS1 DataBar Limited Margin Check

Parameter # 728 (SSI #F1h D8h)

This parameter sets the margin level for GS1 DataBar.

The scanner offers four levels of decode security for GS1 DataBar Limited barcodes. There is an inverse relationship between the level of margin check and scanner aggressiveness. Increasing the level of margin check can reduce scanning aggressiveness, so select only the level of margin check necessary.

- Margin Check Level 1 – No clear margin required. This complies with the original GS1 standard, yet can result in erroneous decoding of a DataBar Limited barcode when scanning some UPC symbols that start with digits 9 and 7.
- Margin Check Level 2 – Automatic risk detection. This level of margin check can result in erroneous decoding of DataBar Limited barcodes when scanning some UPC symbols. If a misdecode is detected, the scanner operates in Level 3 or Level 1.
- *Margin Check Level 3 – Margin check level reflects the newly proposed GS1 standard that requires a five times trailing clear margin.
- Margin Check Level 4 – Margin check level extends beyond the standard required by GS1. This level of margin check requires a five times leading and trailing clear margin.



GS1 DataBar Limited Margin Check Level 1 (1)



GS1 DataBar Limited Margin Check Level 2 (2)



*GS1 DataBar Limited Margin Check Level 3 (3)



GS1 DataBar Limited Margin Check Level 4 (4)

GS1 Digital Link

Parameter #2373 (SSI #F8h 09h 45h)

This parameter enables or disables the scanner to decode GS1 Digital Link barcodes.



Enable (1)



*Disable (0)

GS1 Digital Link Data Format

Parameter # 2509 (SSI # F8h 09h CDh)

The 2D barcode is sent according to the GS1 Digital Link specification.

- **Default Format:** The 2D barcode is sent according to the GS1 Digital Link specification.
- **Send Raw Data:** When GS1 Digital Link is enabled, and GS1 Digital Link Mode is set to **Mode 2 - Prioritize 2D** or **Mode 3 – Corroborate 1D and 2D GTIN Match**, this option will send the full 2D barcode instead of parsing the element string or URL.



NOTE: This does not apply when GS1 Digital Link Mode is set to **Mode 1 - GTIN Only**.

- **Convert to 1D Equivalent:** When GS1 Digital Link is enabled and GS1 Digital Link Mode is set to **Mode 1 – GTIN Only**, this option will convert the 2D barcode to UPC-A, EAN-13 or EAN-8, or 14 digit GS1 Databar depending on the data content.



NOTE: Note: This does not apply when GS1 Digital Link Mode is set to **Mode 2 - Prioritize 2D** or **Mode 3 – Corroborate 1D and 2D GTIN Match**.

- **Convert to GS1-Databar 14 Digits:** When GS1 Digital Link is enabled and GS1 Digital Link Mode is set to **Mode 1 - GTIN Only**, this option will convert the 2D barcode to 14 digit GS1 Databar.



NOTE: Note: This does not apply when GS1 Digital Link Mode is set to **Mode 2 - Prioritize 2D** or **Mode 3 – Corroborate 1D and 2D GTIN Match**.



*Default Format (0)



Send Raw Data Value (1)



Convert to 1D Equivalent (2)



Convert to GS1-Databar 14 Digits (3)

GS1 Digital Link Mode

Parameter #2374 (SSI #F8h 09h 46h)

This parameter selects the GS1 Digital Link Mode when the GS1 Digital Link is enabled.

- **Mode 1 GTIN only:** This mode sends either the 1D GTIN or 2D GTIN, whichever is decoded first.
- **Mode 2 Prioritize 2D:** This mode prioritizes the 2D GS1 Digital Link over 1D barcodes. If it sees the 2D within the GS1 Digital Link Prioritization Timeout, it reports the 2D barcode only. If it does not decode a 2D GS1 Digital Link barcode within the GS1 Digital Link Prioritization Timeout, it will report the 1D barcode, assuming the 1D was in the field of view and decoded.
- **Mode 3 Corroborate 1D and 2D GTINs Match:** The 1D barcode is reported if it is decoded before the 2D barcode. If a matching GTIN 2D barcode is seen within the GS1 Digital Link Prioritization Timeout, the 2D is also reported. The matching 1D and 2D barcodes have the same unique 8-digit prefix to indicate they have the same data. If the 2D is decoded first before the 1D, only the 2D is reported.



*Mode 1: GTIN only (1)



Mode 2: Prioritize 2D (2)



Mode 3: Corroborate 1D and 2D GTINs Match (3)

GS1 Digital Link Prioritization Timeout

Parameter #2491 (SSI #F8h 09h BBh)

This parameter defines the maximum time (msec) the scanner attempts to decode a 2D GS1 Digital Link barcode. The default value is 200 msec.

To set the GS1 Digital Link Prioritization Timeout, scan the barcode below. Then, scan four barcodes from the [Numeric Barcodes](#) corresponding to the desired prioritization time. Enter leading zeroes for times of less than 4 values. For example, to enter 250 msec, scan **0250**. To correct an error or change the selection, scan [Cancel](#).

- When the Digital Link Mode is set to Mode 2, the time specifies how long the scanner searches for a 2D GS1 Digital Link barcode. If the timer expires before finding the 2D GS1 barcode, the 1D barcode is sent.
- When the Digital Link Mode is set to Mode 3, if the 1D barcode is decoded first, the timeout specifies how long the scanner continues to searches for a 2D barcode.



NOTE: This parameter is set in 1 msec increments.



Set Timeout


Redundancy Level

Parameter # 78 (SSI #4Eh)

This parameter sets the redundancy level appropriate to the barcode quality.

Select higher redundancy levels for decreasing levels of barcode quality. As redundancy levels increase, the scanner's aggressiveness decreases.


- *Redundancy Level 1 - The scanner must read the following code types twice before decoding:
 - Codabar (8 characters or less)
 - MSI (4 characters or less)
 - D 2 of 5 (8 characters or less)
 - I 2 of 5 (8 characters or less)
- Redundancy Level 2 - The scanner must read all code types twice before decoding.
- Redundancy Level 3 - The scanner reads all code types twice before decoding. The following are read three times before decoding:
 - Codabar (8 characters or less)
 - MSI (4 characters or less)
 - D 2 of 5 (8 characters or less)
 - I 2 of 5 (8 characters or less)
- Redundancy Level 4 - The scanner must read all code types three times before decoding.



*Redundancy Level 1 (1)



Redundancy Level 2 (2)



Redundancy Level 3 (3)



Redundancy Level 4 (4)

Security Level

Parameter # 77 (SSI #4Dh)

This parameter sets the security level.

The scanner offers four levels of decode security, which include the Code 128 family, UPC/EAN/JAN, and Code 93. Select increasing levels of security for decreasing levels of scanning quality. There is an inverse relationship between security and scanner aggressiveness, so choose the security level necessary for the application.


- Security Level 0 - The scanner operates in its most aggressive state, while providing sufficient security decoding most in-spec barcodes.
- Security Level 1 - This default setting eliminates most mis-decodes.
- Security Level 2 - Select this option if Security Level 1 fails to eliminate mis-decodes.
- Security Level 3 - Select this security level if Security Level 2 fails to eliminate mis-decodes.



NOTE: Selecting this option is an extreme measure against mis-decoding severely out-of-spec barcodes, and significantly reduces the decoding ability of the scanner. If this level of security is required, consider improving the quality of the barcodes.



Security Level 0 (0)



*Security Level 1 (1)



Security Level 2 (2)



Security Level 3 (3)

1D Quiet Zone Level

Parameter # 1288 (SSI #F8h 05h 08h)

This parameter sets the level of aggressiveness when setting a reduced quiet zone (the margin on either side of a barcode), and applies to symbologies enabled by a Reduced Quiet Zone parameter.

Because higher levels increase the decoding time and risk of mis-decodes, Zebra strongly recommends enabling only the symbologies which require higher quiet zone levels, and leaving Reduced Quiet Zone disabled for all other symbologies. Options are:

- 1D Quiet Zone Level 0 - The scanner performs normally in terms of quiet zone.

- *1D Quiet Zone Level 1 - The scanner performs more aggressively in terms of quiet zone.
- 1D Quiet Zone Level 2 - The scanner only requires a quiet zone at the end of barcode for decoding.
- 1D Quiet Zone Level 3 - The scanner decodes anything in terms of quiet zone or end of barcode.




1D Quiet Zone Level 0 (0)



*1D Quiet Zone Level 1 (1)



1D Quiet Zone Level 2 (2)



1D Quiet Zone Level 3 (3)

Intercharacter Gap Size

Parameter # 381 (SSI #F0h 7Dh)

This parameter enables a device to tolerate large intercharacter gap sizes.

The Code 39 and Codabar symbologies typically contain small intercharacter gaps. Due to various barcode printing technologies, these gaps can sometimes exceed the maximum allowed size, preventing the scanner from decoding the symbol. If there is a decoding issues, scan the Large Intercharacter Gaps parameter to enable the scanner to tolerate these out-of-specification barcodes.



*Normal Intercharacter Gaps (6)



Large Intercharacter Gaps (10)

Composite CC-C


Parameter # 341 (SSI #F0h 55h)

This parameter enables or disables the scanner to decode Composite barcodes of type CC-C.

- Enabled - enables CC-C.
- Disabled - disables CC-C.



Enable CC-C (1)



*Disable CC-C (0)

Composite CC-A/B

Parameter # 342 (SSI #F0h 56h)

This parameter enables or disables the scanner to decode CC-A/B.

- Enabled - enables CC-A/B.
- *Disabled - disables CC-A/B.



Enable CC-A/B (1)



*Disable CC-A/B (0)

Composite TLC-39

Parameter # 371 (SSI #F0h 73h)

This parameter enables or disables the scanner to decode TLC-39 barcodes.

- Enabled - enables TLC-39.
- *Disabled - disables TLC-39.



Enable TLC39 (1)



*Disable TLC39 (0)

Composite Inverse

Parameter # 1113 (SSI #F8h 04h 59h)

This parameter sets Composite for either regular decode or inverse decode.

- *Regular Only - The scanner decodes regular Composite barcodes only. Before selecting this, set [Inverse 1D](#) to Regular Only or Inverse Autodetect.
- Inverse Only - The scanner decodes inverse Composite barcodes only. This mode only supports Composite Inverse that includes DataBar combined with CCAB, and does not support other 1D/2D combinations. Before selecting this, first enable [Composite CC-A/B](#), and set [Inverse 1D](#) to Inverse Only or Inverse Autodetect.



*Regular Only (0)



Inverse Only (1)

UPC Composite Mode

Parameter # 344 (SSI #F0h 58h)

This parameter links UPC symbols with a 2D symbol during transmission, treating them as a single symbol.

- *UPC Never Linked - Transmit UPC barcodes regardless of whether a 2D symbol is detected.
- UPC Always Linked - Transmit UPC barcodes along with the 2D portion. If 2D is not present, the scanner does not transmit the barcode.
- Autodiscriminate UPC Composites - The scanner checks for a 2D portion, then transmits both the UPC and 2D portion if present.



*UPC Never Linked (0)



UPC Always Linked (1)



Autodiscriminate UPC Composites (2)

Composite Beep Mode

Parameter # 398 (SSI #F0h 8Eh)

This parameter selects the number of decode beeps emitted when a composite symbol is decoded.

- Single Beep - Sounds one beep after decoding both codes.
- *Beep for each code type - Sounds one beep as the scanner decoded each code type.
- Double Beep - Sounds two beeps after decoding both codes.



Single Beep After Both are Decoded (0)



*Beep as Each Code Type is Decoded (1)



Double Beep After Both are Decoded (2)

GS1-128 Emulation Mode for UCC/EAN Composite Codes

Parameter # 427 (SSI #F0h ABh)

This parameter enables or disables GS1-128 Emulation Mode for UCC/EAN Composite Codes.

- Enabled - enables GS1-128 Emulation Mode for UCC/EAN Composite Codes.
- *Disabled - disables GS1-128 Emulation Mode for UCC/EAN Composite Codes.



Enable GS1-128 Emulation Mode for UCC/EAN
Composite Codes (1)



*Disable GS1-128 Emulation Mode for UCC/EAN
Composite Codes (0)

PDF417

Parameter # 15 (SSI 0Fh)

This parameter enables or disables the scanner to decode PDF417 barcodes.

- *Enabled - enables PDF417 decoding.
- Disabled - disables PDF417 decoding.



*Enable PDF417 (1)



Disable PDF417 (0)

MicroPDF417

Parameter # 227 (SSI #E3h)

This parameter enables or disables the scanner to decode MicroPDF417 decoding.

- Enabled - enables MicroPDF417 decoding.
- *Disabled - disables MicroPDF417decoding.



Enable MicroPDF417 (1)



*Disable MicroPDF417 (0)

Code 128 Emulation

Parameter # 123 (SSI #7Bh)

This parameter transmits data from certain MicroPDF417 symbols as Code 128.

You must enable [AIM Code Characters](#) for this parameter to work.

Enable Code 128 Emulation to transmit these MicroPDF417 symbols with one of the following prefixes:

]C1 if the first codeword is 903-905

]C2 if the first codeword is 908 or 909

]C0 if the first codeword is 910 or 911

Disable Code 128 Emulation to transmit these MicroPDF417 symbols with one of the following prefixes:

]L3 if the first codeword is 903-905

]L4 if the first codeword is 908 or 909

]L5 if the first codeword is 910 or 911



NOTE: Linked MicroPDF codewords 906, 907, 912, 914, and 915 are not supported. Use GS1 Composites instead.



Enable Code 128 Emulation (1)



*Disable Code 128 Emulation (0)

Data Matrix


Parameter # 292 (SSI #F0h 24h)

This parameter enables or disables the scanner to decode Data Matrix barcodes.

- *Enabled - enables Data Matrix decoding.
- Disabled - disables Data Matrix decoding.



*Enable Data Matrix (1)



Disable Data Matrix (0)

GS1 Data Matrix

Parameter # 1336 (SSI #F8h 05h 38h)

This parameter enables or disables the scanner to decode GS1 Data Matrix.

- Enabled - enables GS1 Data Matrix.
- *Disabled - disables GS1 Data Matrix.



Enable GS1 Data Matrix (1)



*Disable GS1 Data Matrix (0)

Data Matrix Inverse

Parameter # 588 (SSI #F1h 4Ch)

This parameter configures the scanner's ability to decode inverse Data Matrix barcodes.

- Regular Only - The scanner decodes regular Data Matrix barcodes only.
- Inverse Only - The scanner decodes inverse Data Matrix barcodes only.
- *Inverse Autodetect - The scanner decodes both regular and inverse Data Matrix barcodes.



Regular Only (0)



Inverse Only (1)



*Inverse Autodetect (2)

Decode Data Matrix Mirror Images

Parameter # 537 (SSI #F1h 19h)

This parameter selects an option for decoding Data Matrix mirror images.

- Never - Do not decode Mirrored Data Matrix barcodes.
- Always - Decode only Mirrored Data Matrix barcodes.
- *Auto - Decode both mirrored and unmirrored Data Matrix barcodes.



Never (0)



Always (1)



*Auto (2)

QR Code

Parameter # 293 (SSI #F0h 25h)

This parameter enables or disables the scanner to decode QR Code barcodes.

- *Enabled - enables QR Code decoding.
- Disabled - disables QR Code decoding.



NOTE: Enabling this parameter also enables QR Mirrored and Linked QR.



*Enable QR Code (1)



Disable QR Code (0)

Weblink QR

Parameter # 1947 (SSI #F8 07 9Bh)

This parameter enables or disables the scanner to decode Weblink QR barcodes.

- Disable Weblink QR Codes - prevents the scanner from decoding Weblink QR codes.
- Enable Weblink QR Codes - enables the scanner to decode Weblink QR codes.



*Enable Weblink QR (1)



Disable Weblink QR (0)

GS1 QR

Parameter # 1343 (SSI #F8h 05h 3Fh)

This parameter enables or disables the scanner to decode GS1 QR barcodes.

- *Enabled - enables GS1 QR decoding.
- Disabled - disables GS1 QR decoding.



*Enable GS1 QR (1)



Disable GS1 QR (0)

MicroQR

Parameter # 573 (SSI #F1h 3Dh)

This parameter enables or disables the scanner to decode MicroQR barcodes.

- *Enabled - enables MicroQR decoding.
- Disabled - disables MicroQR decoding.



*Enable MicroQR (1)



Disable MicroQR (0)

Linked QR Mode

Parameter # 1847 (SSI #737h)

Linked QR mode can be used to split data across several QR codes.



NOTE: Linked QR mode is not available

- *Linked QR Only - The scanner does not decode individual QR symbols from a set of linked QR codes.
- Individual QR With Headers - The scanner decodes individual QR symbols from a set of linked QR codes and retains the header information and data.
- Individual QR No Headers - The scanner decodes individual QR symbols from a set of linked QR codes and transmits the data without header information.



*Linked QR Only (0)



Individual QR With Headers (1)



Individual QR No Headers (2)

Rectangular Micro QR

Parameter # 2517 (SSI # F8h 09h D5h)

This parameter enables or disables the scanner to decode rectangular Micro QR (rMQR) barcodes.



*Disable (0)



Enable (1)

Aztec

Parameter # 574 (SSI # F1h 3Eh)

This parameter enables or disables the scanner to decode Aztec barcodes.

- *Enabled - enables Aztec decoding.
- Disabled - disables Aztec decoding.



NOTE: Enabling this parameter also enables Linked Aztec.



*Enable Aztec (1)



Disable Aztec (0)

Aztec Inverse

Parameter # 589 (SSI #F1h 4Dh)

This parameter configures the Aztec inverse decoder setting.

- Regular Only - The scanner decodes regular Aztec barcodes only.
- Inverse Only - The scanner decodes inverse Aztec barcodes only.
- *Inverse Autodetect - The scanner decodes both regular and inverse Aztec barcodes.



Regular Only (0)



Inverse Only (1)



*Inverse Autodetect (2)

Han Xin

Parameter # 1167 (SSI #F8h 04h 8Fh)

This parameter enables or disables the scanner to decode Han Xin.

- Enabled - enables Han Xin.
- *Disabled - disables Han Xin.



Enable Han Xin (1)



*Disable Han Xin (0)

Han Xin Inverse

Parameter # 1168 (SSI #F8h 04h 90h)

This parameter selects a Han Xin inverse decoder setting.

- *Regular Only - The scanner decodes Han Xin barcodes with normal reflectance only.
- Inverse Only - The scanner decodes Han Xin barcodes with inverse reflectance only.
- Inverse Autodetect - The scanner decodes both regular and inverse Han Xin barcodes.



*Regular Only (0)



Inverse Only (1)



Inverse Autodetect (2)

Grid Matrix

Parameter # 1718 (SSI #F8 06h B6h)

This parameter enables or disables the scanner to decode Grid Matrix barcodes.

- Enabled - enables Grid Matrix.
- *Disabled - disables Grid Matrix.



Enable Grid Matrix (1)



*Disable Grid Matrix (0)

Grid Matrix Inverse

Parameter # 1719 (SSI #F8h 06h B7h)

This parameter selects a Grid Matrix inverse decoder setting.

- *Regular Only - the imager decodes Grid Matrix barcodes with normal reflectance only.
- Inverse Only - the imager decodes Grid Matrix barcodes with inverse reflectance only.
- Inverse Autodetect - the imager decodes both regular and inverse Grid Matrix barcodes.



*Regular (0)



Inverse Only (1)



Inverse Autodetect (2)

Grid Matrix Mirrored

Parameter # 1736 (SSI #F8h 06h C8h)

This parameter selects a mirror image Grid Matrix setting.

- Never Mirror - the imager decodes non-mirrored Grid Matrix barcodes only.
- Always Mirrored - the imager decodes mirrored Grid Matrix barcodes only.
- Autodetect - the imager decodes both mirrored and non-mirrored Grid Matrix barcodes.



Never Mirrored Only (0)



Always Mirrored Only (1)



Mirrored Autodetect (2)

DotCode

Parameter # 1906 (SSI #F8 07 72h)

You can enable or disable DotCode.

- Enabled - enables DotCode.
- *Disabled - disables DotCode.



*Disable DotCode (0)



Enable DotCode (1)

DotCode Prioritize

Parameter # 1937 (SSI #F8 07 91h)

This parameter enables or disables giving priority to DotCode decoding versus other symbologies.

- Disabled - disables DotCode as a priority.
- *Enabled - enables DotCode as a priority.



Disable DotCode Prioritize (0)



*Enable DotCode Prioritize (1)

DotCode Inverse

Parameter # 1907 (SSI #F8 07 73h)

This parameter selects the DotCode Inverse decoder setting.

- Regular Only - the device decodes DotCode Inverse codes with normal reflectance only.
- Inverse Only - the device decodes DotCode Inverse codes with inverse reflectance only.
- Inverse Autodetect - the device decodes DotCode Inverse codes with both normal and inverse reflectance.



Regular (0)



Inverse Only (1)



*Inverse Autodetect (2)

DotCode Mirrored

Parameter # 1908 (SSI #F8 07 74h)

This parameter sets a DotCode Mirror decoder setting.

- Never - decodes non-mirrored DotCode codes only.
- Always - decodes mirrored DotCode codes only.
- *Autodetect - decodes both mirrored and non-mirrored DotCode codes.



Never (0)



Always (1)



*Autodetect (2)

DotCode Erasure Limit

Parameter # 2063 (SSI # F8 08 0F)

This parameter sets the maximum number of erasures in DotCode codewords before passing the codewords for error correction.

The value range is from 4 to 20. The default value is 10. A higher value means that DotCode barcodes are easier to decode, but increases the chance of a decode error.

To set a DotCode Erasure Limit value, scan the following barcode, and then scan two barcodes from [Numeric Barcodes](#) that correspond to the desired value. Enter a leading zero for single digit numbers. For example, to set an erasure value of 4, scan this barcode, and then scan the 0 and 4 barcodes. To correct an error or change the selection, scan Cancel.



DotCode Erasure Limit

Macro PDF Features

Macro PDF is a special feature for combining multiple PDF symbols into one file. The scanner can decode symbols encoded with this feature, and can store more than 64 Kb of decoded data from up to 50 MacroPDF symbols.

When printing, keep each Macro PDF sequence separate, as each sequence has unique identifiers. Do not mix barcodes from several Macro PDF sequences, even if they encode the same data. When scanning a Macro PDF sequence, scan the entire sequence without interruption. When scanning a mixed sequence, two long low beeps (low/low) indicate an inconsistent file ID or inconsistent symbology error.

Macro PDF User Indications

In this mode the scanner provides the following feedback.



NOTE: The beep only sounds if the *BEEPER_ON signal is connected.



NOTE: The T columns indicate whether the symbol transmitted to the host (N = No transmission).

User Scans	Passthrough All Symbols		Transmit Any Symbol in Set		Buffer All Symbols	
	Beep	T	Beep	T	Beep	T
Last Macro PDF in set	Decode beep	Y	Decode beep	Y	Decode beep	Y
Any Macro PDF in set except last	Decode beep	Y	Decode beep	Y	2 short low	N
Macro PDF is not in current set	Decode beep	Y	2 long low	N	2 long low	N
Invalid Macro PDF formatting	Decode beep	Y	2 long low	N	2 long low	N
Macro PDF from set was already scanned	Decode beep	Y	4 long low	N	4 long low	N
Out of Macro PDF memory	N/A	N/A	3 long low	N	3 long low	N
A non-Macro PDF scanned during a set	N/A	N/A	4 long low	N	4 long low	N
Flush Macro PDF	Low high	N	5 long low	N	5 long low	Y
Abort Macro PDF	High low high low	N	High low high low	N	High low high low	N

Flush Macro PDF Buffer

This parameter flushes the buffer of all decoded Macro PDF data stored to that point, transmits it to the host device, and aborts from Macro PDF mode.



Flush Macro PDF Buffer

Abort Macro PDF Entry

This parameter clears all currently-stored Macro PDF data in the buffer without transmission and aborts from Macro PDF mode.



Abort Macro PDF Entry

Postal Codes

These parameters are regarding postal codes from around the globe.

Digimarc Barcode

Digimarc Barcode is an invisible machine-readable code reported as UPC-A, UPC-E, EAN-13, or RSS Expanded.



NOTE: Converting the Digimarc reported code types to other barcode types is not supported.

AIM and Symbol code IDs are supported for the reported Digimarc code types.

Scan one of the following barcodes to enable or disable Digimarc Barcode.



Enable Digimarc Barcode



*Disable Digimarc Barcode

Digimarc Parameter Defaults

The following table lists defaults for Digimarc parameters.

You can change these values in one of three ways:

- Scan the appropriate barcodes in this section. The new value replaces the standard default value in the SP20's memory. To recall default parameter values, scan [Default Parameters](#).
- Configure the scanner using 123Scan. See [123Scan and Software Tools](#).
-

Table 18 Parameter Defaults

Parameter	Parameter Number	SSI Number	Default
Digimarc Digital Watermarks	1687	F8h 06h 97h	Disable
Digimarc Data Mode	2257	F8h0hD1h	Compatible Mode

Table 18 Parameter Defaults (Continued)

Parameter	Parameter Number	SSI Number	Default
Digimarc GIA17	2488	F8h 09h B8h	Disable
Digimarc Gift card Security	2541	F8h 09h Edh	Enable

Digimarc Digital Watermarks


Parameter # 1687 (SSI # F8h 0h 97h)

This parameter enables or disables Digimarc Digital Watermarks being added to decode data.

- Enabled - Enables the Digimarc Digital Watermarks.
- *Disabled - Disables the Digimarc Digital Watermarks.



Enable Digimarc Digital Watermarks/DW (1)



*Disable Digimarc Digital Watermarks/DW (0)

Digimarc Data Mode

Parameter #2257 (SSI #F8h 08h D1h)

This parameter selects the output format and type of Digimarc barcode.

The Digimarc barcode formats are:

- *1 - Compatible
- 2 - Enhanced
- 3 - Native



*Compatible(1)



Enhanced (2)



Native (3)

Digimarc GIA17 Format

Parameter # 2488 (SSI #F8h 09h B8h)

This parameter enables or disables the scanner to decode the Digimarc GIA format. Digimarc must be enabled for this parameter to apply.



Enabled(1)



*Disabled(0)

Digimarc Gift Card Security

Parameter # 2541 (SSI # F8h 09h EDh)

This parameter enables or disables Digimarc Gift card security.



Disable (0)



*Enable (1)

Numeric Barcodes

For parameters requiring specific numeric values, scan the appropriately numbered barcode(s).



0



1



2



3




4



5



6



7




8



9

Cancel

To correct an error or change a selection, scan the barcode below.



Cancel

Alphanumeric Barcodes

For parameters requiring specific alphanumeric values, scan the appropriately numbered barcode(s).

Cancel

To correct an error or change a selection, scan the barcode below.



Cancel

Alphanumeric Barcodes



Space



#



\$

Alphanumeric Barcodes



*



%



+




-



·



/




!



"



0



1




2



3



4



5



6



7

Alphanumeric Barcodes



?



[




]



-



>



@



\




^



,



NOTE: Do not confuse the following barcodes with those on the numeric keypad.




0



1



2




3



4



5



6




7




8



9



End of Message



Cancel



A



B



C



E



G




I



K



D



F



H




J



L



M



N



O



P



Q



R



S



U



W




Y



a




T



V



X



Z



b



c



d



e



f



g




h



i



j



k



l



m



n



o



p



q



s



u



w



y



r




t



v



x



z




{



|



}



~

ASCII Character Sets

Use this table to identify ASCII codes and their corresponding keyboard keystroke.



NOTE: For the Keyboard Wedge Interface, Code 39 Full ASCII interprets the barcode special character (\$ + % /) preceding a Code 39 character and assigns an ASCII character value to the pair. For example, if you enable Code 39 Full ASCII and scan +B, it transmits as b, %J as ?, and %V as @. Scanning ABC%i outputs the keystroke equivalent of ABC >.

Table 19 ASCII Character Sets

ASCII Value (Prefix/ Suffix Value)	Full ASCII Code 39 Encode Char	Keystroke	ASCII Character (Applies to RS-232 Only)
1000	%U	CTRL 2	NUL
1001	\$A	CTRL A	SOH
1002	\$B	CTRL B	STX
1003	\$C	CTRL C	ETX
1004	\$D	CTRL D	EOT
1005	\$E	CTRL E	ENQ
1006	\$F	CTRL F	ACK
1007	\$G	CTRL G	BELL
1008	\$H	CTRL H/ BACKSPACE ^a	BCKSPC
1009	\$I	CTRL I/ HORIZONTAL TAB ^b	HORIZ TAB
1010	\$J	CTRL J	LF/NW LN
1011	\$K	CTRL K	VT
1012	\$L	CTRL L	FF
1013	\$M	CTRL M/ ENTER ^c	CR/ENTER
1014	\$N	CTRL N	SO
1015	\$O	CTRL O	SI
1016	\$P	CTRL P	DLE
1017	\$Q	CTRL Q	DC1/XON

Table 19 ASCII Character Sets (Continued)

ASCII Value (Prefix/ Suffix Value)	Full ASCII Code 39 Encode Char	Keystroke	ASCII Character (Applies to RS-232 Only)
1018	\$R	CTRL R	DC2
1019	\$S	CTRL S	DC3/XOFF
1020	\$T	CTRL T	DC4
1021	\$U	CTRL U	NAK
1022	\$V	CTRL V	SYN
1023	\$W	CTRL W	ETB
1024	\$X	CTRL X	CAN
1025	\$Y	CTRL Y	EM
1026	\$Z	CTRL Z	SUB
1027	%A	CTRL [	ESC
1028	%B	CTRL \	FS
1029	%C	CTRL]	GS
1030	%D	CTRL 6	RS
1031	%E	CTRL -	US
1032	Space	Space	Space
1033	/A	!	!
1034	/B	"	"
1035	/C	#	#
1036	/D	\$	\$
1037	/E	%	%
1038	/F	&	&
1039	/G	'	'
1040	/H	(	(
1041	/I	)	)
1042	/J	*	*
1043	/K	+	+
1044	/L	,	,
1045	-	-	-
1046	.	.	.
1047	/o	/	/
1048	0	0	0
1049	1	1	1
1050	2	2	2

Table 19 ASCII Character Sets (Continued)

ASCII Value (Prefix/ Suffix Value)	Full ASCII Code 39 Encode Char	Keystroke	ASCII Character (Applies to RS-232 Only)
1051	3	3	3
1052	4	4	4
1053	5	5	5
1054	6	6	6
1055	7	7	7
1056	8	8	8
1057	9	9	9
1058	/Z	:	:
1059	%F	;	;
1060	%G	<	<
1061	%H	=	=
1062	%I	>	>
1063	%J	?	?
1064	%V	@	@
1065	A	A	A
1066	B	B	B
1067	C	C	C
1068	D	D	D
1069	E	E	E
1070	F	F	F
1071	G	G	G
1072	H	H	H
1073	I	I	I
1074	J	J	J
1075	K	K	K
1076	L	L	L
1077	M	M	M
1078	N	N	N
1079	O	O	O
1080	P	P	P
1081	Q	Q	Q
1082	R	R	R
1083	S	S	S

Table 19 ASCII Character Sets (Continued)

ASCII Value (Prefix/ Suffix Value)	Full ASCII Code 39 Encode Char	Keystroke	ASCII Character (Applies to RS-232 Only)
1084	T	T	T
1085	U	U	U
1086	V	V	V
1087	W	W	W
1088	X	X	X
1089	Y	Y	Y
1090	Z	Z	Z
1091	%K	[	[
1092	%L	\	\
1093	%M	]	]
1094	%N	^	^
1095	%O	_	_
1096	%W	`	`
1097	+A	a	a
1098	+B	b	b
1099	+C	c	c
1100	+D	d	d
1101	+E	e	e
1102	+F	f	f
1103	+G	g	g
1104	+H	h	h
1105	+I	i	i
1106	+J	j	j
1107	+K	k	k
1108	+L	l	l
1109	+M	m	m
1110	+N	n	n
1111	+O	o	o
1112	+P	p	p
1113	+Q	q	q
1114	+R	r	r
1115	+S	s	s
1116	+T	t	t

Table 19 ASCII Character Sets (Continued)

ASCII Value (Prefix/ Suffix Value)	Full ASCII Code 39 Encode Char	Keystroke	ASCII Character (Applies to RS-232 Only)
1117	+U	u	u
1118	+V	v	v
1119	+W	w	w
1120	+X	x	x
1121	+Y	y	y
1122	+Z	z	z
1123	%P	{	{
1124	%Q		
1125	%R	}	}
1126	%S	~	~
1127			Undefined
7013			ENTER

- ^a The keystroke in bold transmits only if you enabled Function Key Mapping. Otherwise, the unbold keystroke transmits.
- ^b The keystroke in bold transmits only if you enabled Function Key Mapping. Otherwise, the unbold keystroke transmits.
- ^c The keystroke in bold transmits only if you enabled Function Key Mapping. Otherwise, the unbold keystroke transmits.

Table 20 ALT Key Character Set

ALT Keys	Keystroke
2045	ALT -
2050	ALT 2
2054	ALT 6
2064	ALT @
2065	ALT A
2066	ALT B
2067	ALT C
2068	ALT D
2069	ALT E
2070	ALT F
2071	ALT G
2072	ALT H
2073	ALT I

Table 20 ALT Key Character Set (Continued)

ALT Keys	Keystroke
2074	ALT J
2075	ALT K
2076	ALT L
2077	ALT M
2078	ALT N
2079	ALT O
2080	ALT P
2081	ALT Q
2082	ALT R
2083	ALT S
2084	ALT T
2085	ALT U
2086	ALT V
2087	ALT W
2088	ALT X
2089	ALT Y
2090	ALT Z
2091	ALT [
2092	ALT \
2093	ALT]



NOTE: GUI Shift Keys - The Apple™ iMac keyboard has an apple key on either side of the space bar. Windows-based systems have a GUI key to the left of the left ALT key, and to the right of the right ALT key.

Table 21 GUI Key Character Set

GUI Key	Keystroke
3000	Right Control Key
3048	GUI 0
3049	GUI 1
3050	GUI 2
3051	GUI 3
3052	GUI 4
3053	GUI 5

Table 21 GUI Key Character Set (Continued)

GUI Key	Keystroke
3054	GUI 6
3055	GUI 7
3056	GUI 8
3057	GUI 9
3065	GUI A
3066	GUI B
3067	GUI C
3068	GUI D
3069	GUI E
3070	GUI F
3071	GUI G
3072	GUI H
3073	GUI I
3074	GUI J
3075	GUI K
3076	GUI L
3077	GUI M
3078	GUI N
3079	GUI O
3080	GUI P
3081	GUI Q
3082	GUI R
3083	GUI S
3084	GUI T
3085	GUI U
3086	GUI V
3087	GUI W
3088	GUI X
3089	GUI Y
3090	GUI Z

Table 22 F Key Character Set

F Keys	Keystroke
5001	F 1
5002	F 2
5003	F 3
5004	F 4
5005	F 5
5006	F 6
5007	F 7
5008	F 8
5009	F 9
5010	F 10
5011	F 11
5012	F 12
5013	F 13
5014	F 14
5015	F 15
5016	F 16
5017	F 17
5018	F 18
5019	F 19
5020	F 20
5021	F 21
5022	F 22
5023	F 23
5024	F 24

Programming Reference

This section provides symbol and AIM code identifiers.

Symbol Code Identifiers

Symbol code identifiers identify the symbology type of decode data. The identifier may be appended to data transmitted to the host, or used in other ways to help identify decode data.

Table 23 Symbol Code Characters

Code Character	Code Type
A	UPC-A, UPC-E, UPC-E1, EAN-8, EAN-13
B	Code 39, Code 32
C	Codabar
D	Code 128, ISBT 128, ISBT 128 Concatenated
E	Code 93
F	Interleaved 2 of 5
G	Discrete 2 of 5, or Discrete 2 of 5 IATA
J	MSI
K	GS1-128
L	Bookland EAN
R	GS1 DataBar Family
U	Chinese 2 of 5
V	Korean 3 of 5
X	ISSN EAN, PDF417, Macro PDF417, Micro PDF417
z	Aztec, Aztec Rune
P00	Data Matrix
P01	QR Code, MicroQR
P02	Maxicode
P08	Netherlands KIX Code

Table 23 Symbol Code Characters (Continued)

Code Character	Code Type
POA	USPS 4CB/One Code/Intelligent Mail
POC	Mailmark
POD	Grid Matrix
POG	GS1 Data Matrix
POH	Han Xin
POQ	GS1 QR
POX	Signature Capture

AIM Code Identifiers

An AIM code identifier identifies the symbology type of decode data. The identifier may be appended to data transmitted to the host, or used in other ways to help identify decode data.

Each AIM Code Identifier contains the three-character string]cm where:

] = Flag Character (ASCII 93)

c = Code Character (see table below)

m = Modifier Character (see table below)

Table 24 AIM Code Characters

Code Character	Code Type
A	Code 39, Code 39 Full ASCII, Code 32
C	Code 128, ISBT 128, ISBT 128 Concatenated, GS1-128, Coupon (Code 128 portion)
d	Data Matrix, GS1 Data Matrix
E	UPC/EAN, Coupon (UPC portion)
e	GS1 DataBar Family
F	Codabar
G	Code 93
g	Grid Matrix
h	Han Xin
I	Interleaved 2 of 5
L	PDF417, Macro PDF417, Micro PDF417
M	MSI

Table 24 AIM Code Characters (Continued)

Code Character	Code Type
Q	QR Code, MicroQR, GS1 QR
S	Discrete 2 of 5, IATA 2 of 5
U	Maxicode
z	Aztec, Aztec Rune
X	Bookland EAN, ISSN EAN, Code 39, Chinese 2 of 5, Korean 3 of 5, US Postnet, US Planet, UK Postal, Japan Postal, Australia Post, Netherlands KIX Code, USPS 4CB/One Code/ Intelligent Mail, UPU FICS Postal, Mailmark, Signature Capture

The modifier character is the sum of the applicable option values based on the following table.

Table 25 Modifier Characters

Code Type	Option Value	Option
Code 39	0	No check character or Full ASCII processing.
	1	Reader has checked one check character.
	3	Reader has checked and stripped check character.
	4	Reader has performed Full ASCII character conversion.
	5	Reader has performed Full ASCII character conversion and checked one check character.
	7	Reader has performed Full ASCII character conversion and checked and stripped check character.
	Example: A Full ASCII barcode with check character W, A+I+MI+DW, is transmitted as]A7AIMID where 7 = (3+4).	
Code 128	0	Standard data packet, no Function code 1 in first symbol position.
	1	Function code 1 in first symbol character position.
	2	Function code 1 in second symbol character position.
	Example: A Code (EAN) 128 barcode with Function 1 character FNC1 in the first position, AIMID is transmitted as]C1AIMID	
I 2 of 5	0	No check digit processing.
	1	Reader has validated check digit.
	3	Reader has validated and stripped check digit.
	Example: An I 2 of 5 barcode without check digit, 4123, is transmitted as]I04123	
Codabar	0	No check digit processing.
	1	Reader has checked check digit.
	3	Reader has stripped check digit before transmission.
	Example: A Codabar barcode without check digit, 4123, is transmitted as]F04123	
Code 93	0	No options specified at this time. Always transmit 0.

Table 25 Modifier Characters (Continued)

Code Type	Option Value	Option
	Example: A Code 93 barcode 012345678905 is transmitted as]G0012345678905	
MSI	0	Check digits are sent.
	1	No check digit is sent.
	Example: An MSI barcode 4123, with a single check digit checked, is transmitted as]M14123	
D 2 of 5	0	No options specified at this time. Always transmit 0.
	Example: A D 2 of 5 barcode 4123, is transmitted as]S04123	
UPC/EAN	0	Standard data packet in full EAN format, i.e., 13 digits for UPC-A, UPC-E, and EAN-13 (not including supplemental data).
	1	Two digit supplemental data only.
	2	Five digit supplemental data only.
	3	Combined data packet comprising 13 digits from EAN-13, UPC-A or UPC-E symbol and 2 or 5 digits from supplemental symbol.
	4	EAN-8 data packet.
	Example: A UPC-A barcode 012345678905 is transmitted as]E0012345678905	
Bookland EAN	0	No options specified at this time. Always transmit 0.
	Example: A Bookland EAN barcode 123456789X is transmitted as]X0123456789X	
ISSN EAN	0	No options specified at this time. Always transmit 0.
	Example: An ISSN EAN barcode 123456789X is transmitted as]X0123456789X	
GS1 DataBar Family		No option specified at this time. Always transmit 0. GS1 DataBar Omnidirectional and GS1 DataBar Limited transmit with an Application Identifier "01".Note: In GS1-128 emulation mode, GS1 DataBar is transmitted using Code 128 rules (i.e.,]C1).
	Example: A GS1 DataBar Omnidirectional barcode 0110012345678902 is transmitted as]e00110012345678902.	
EAN (GS1 DataBar, GS1-128, 2D portion of UPC composite)		Native mode transmission.  NOTE: UPC portion of composite is transmitted using UPC rules.
	0	Standard data packet.
	1	Data packet containing the data following an encoded symbol separator character.
	2	Data packet containing the data following an escape mechanism character. The data packet does not support the ECI protocol.

Table 25 Modifier Characters (Continued)

Code Type	Option Value	Option
	3	Data packet containing the data following an escape mechanism character. The data packet supports the ECI protocol.
		GS1-128 emulationNote: UPC portion of composite is transmitted using UPC rules.
	1	Data packet is a GS1-128 symbol (i.e., data is preceded with]JC1).
PDF417, Micro PDF417	0	Reader set to conform to protocol defined in 1994 PDF417 symbology specifications. Note: When this option is transmitted, the receiver cannot reliably determine whether ECIs have been invoked or whether data byte 92DEC has been doubled in transmission.
	1	Reader set to follow the ECI protocol (Extended Channel Interpretation). All data characters 92DEC are doubled.
	2	Reader set for Basic Channel operation (no escape character transmission protocol). Data characters 92DEC are not doubled. Note: When decoders are set to this mode, unbuffered Macro symbols and symbols requiring the decoder to convey ECI escape sequences cannot be transmitted.
	3	The barcode contains a GS1-128 symbol, and the first codeword is 903-907, 912, 914, 915.
	4	The barcode contains a GS1-128 symbol, and the first codeword is in the range 908-909.
	5	The barcode contains a GS1-128 symbol, and the first codeword is in the range 910-911.
	Example: A PDF417 barcode ABCD, with no transmission protocol enabled, is transmitted as]L2ABCD.	
Data Matrix	0	ECC 000-140, not supported.
	1	ECC 200.
	2	ECC 200, FNC1 in first or fifth position.
	3	ECC 200, FNC1 in second or sixth position.
	4	ECC 200, ECI protocol implemented.
	5	ECC 200, FNC1 in first or fifth position, ECI protocol implemented.
	6	ECC 200, FNC1 in second or sixth position, ECI protocol implemented.
GS1 Data Matrix	2	ECC 200, FNC1 in first or fifth position.
MaxiCode	0	Symbol in Mode 4 or 5.
	1	Symbol in Mode 2 or 3.
	2	Symbol in Mode 4 or 5, ECI protocol implemented.
	3	Symbol in Mode 2 or 3, ECI protocol implemented in secondary message.

Table 25 Modifier Characters (Continued)

Code Type	Option Value	Option
QR Code	0	Model 1 symbol.
	1	Model 2 / MicroQR symbol, ECI protocol not implemented.
	2	Model 2 symbol, ECI protocol implemented.
	3	Model 2 symbol, ECI protocol not implemented, FNC1 implied in first position.
	4	Model 2 symbol, ECI protocol implemented, FNC1 implied in first position.
	5	Model 2 symbol, ECI protocol not implemented, FNC1 implied in second position.
	6	Model 2 symbol, ECI protocol implemented, FNC1 implied in second position.
GS1 QR	3	Model 2 symbol, ECI protocol not implemented, FNC1 implied in first position.
Aztec	0	Aztec symbol.
	C	Aztec Rune symbol.
Han Xin	0	Generic data, no special features are set. The transmitted data does not follow the AIM ECI protocol.
	1	ECI protocol enabled. There is at least one ECI mode encoded. Transmitted data must follow the AIM ECI protocol.
Mailmark	0	No option specified at this time. Always transmit 0.

Communication Protocol Functionality

This section provides information about functionality supported via communication (cable) interface. The following table lists supported scanner functionality by communication protocol.

Table 26 Communication Interface Functionality

Communication Interfaces	Functionality		
	Data Transmission	Remote Management	Image and Video Transmission
USB			
HID Keyboard Emulation	Supported	Not Available	Not Available
CDC COM Port Emulation	Supported	Not Available	Not Available
SSI over CDC COM Port Emulation	Supported	Supported	Supported
IBM Table-top USB	Supported	Supported	Not Available
IBM Hand-held USB	Supported	Supported	Not Available
USB OPOS Hand-held	Supported	Supported	Not Available
Symbol Native API (SNAPI) without Imaging Interface	Supported	Supported	Not Available
Symbol Native API (SNAPI) with Imaging Interface	Supported	Supported	Supported
RS-232			
Standard RS-232	Supported	Not Available	Not Available
ICL RS-232	Supported	Not Available	Not Available
Fujitsu RS-232	Supported	Not Available	Not Available
Wincor-Nixdorf RS-232 Mode A	Supported	Not Available	Not Available
Wincor-Nixdorf RS-232 Mode B	Supported	Not Available	Not Available
Olivetti ORS4500	Supported	Not Available	Not Available
Omron	Supported	Not Available	Not Available
CUTE	Supported	Not Available	Not Available
OPOS/JPOS	Supported	Not Available	Not Available
SSI	Supported	Supported	Supported

Country Codes

This section provides instructions for programming the keyboard to interface with a USB or keyboard wedge host.

The host powers the scanner. For host setup information, see [USB Interface and Keyboard Wedge Interface](#).

To select a code page for the country keyboard type, see [Country Code Barcodes](#).

Throughout the programming barcode menus, default values are indicated with asterisks (*).

USB and Keyboard Wedge Country Keyboard Types (Country Codes)

Scan the barcode corresponding to the keyboard type. For a USB host, this setting applies only to the USB Keyboard (HID) device. If the keyboard type is not listed, see [Keypad Emulation](#) for the USB HID host.



NOTE: When changing USB country keyboard types, the scanner automatically resets and issues the standard startup beep sequences.

For best results when using international keyboards, enable [USB Keyboard Emulation](#).



IMPORTANT: Some country keyboard barcode types are specific to certain Windows operating systems (i.e., XP and Windows 7 and above). Barcodes requiring a specific Windows OS are noted in the barcode captions.

Use the French International barcode for Belgian French keyboards.

Country Code Barcodes

Parameter # 960

This chapter provides instructions for programming the keyboard to interface with a USB, BT HID, or keyboard wedge host. The host powers the scanner.



*US English (North American)

Country Codes



US English (Mac)



Albanian



Arabic (101)



Arabic (102)



Arabic (102) AZERTY



Azeri (Latin)



Azeri (Cyrillic)




Belarusian

Country Codes



Bosnian (Latin)



Bosnian (Cyrillic)



Bulgarian (Latin)



Bulgarian Cyrillic (Typewriter) (Bulgarian - Windows XP Typewriter - Windows 7 or higher)



Canadian French Win7



Canadian French (Legacy)




Canadian Multilingual Standard



Chinese (ASCII)

Country Codes



Chinese (Simplified)*



Chinese (Traditional)*

*For CJK keyboard types, see [CJK Decode Control](#).



Croatian




Czech



Czech (Programmer)



Czech (QWERTY)



Danish




Dutch (Netherlands)


Country Codes




Estonian



Faeroese



Finnish




French (France)



French International (Belgian French)



Galician



Greek Latin



German


Country Codes



Greek (220) Latin



Greek (319) Latin



Greek



Greek (220)




Greek (319)



Greek Polytonic



Hebrew Israel



Hungarian

Country Codes




Hungarian_101KEY



Icelandic



Irish



Italian



Italian (142)



Japanese (ASCII)




Japanese (SHIFT-JIS)*

*For CJK keyboard types, see [CJK Decode Control](#).



Kazakh

Country Codes



Korean (ASCII)




Korean (Hangul)*

*For CJK keyboard types, see [CJK Decode Control](#).



Kyrgyz




Latin American



Latvian



Latvian (QWERTY)



Lithuanian



Lithuanian (IBM)

Country Codes



Macedonian (FYROM)



Maltese_47KEY



Mongolian



Norwegian



Polish (214)



Polish (Programmer)



Portuguese (Portugal)




Russian

Country Codes




Russian (Typewriter)




Serbian (Latin)




Serbian (Cyrillic)



Slovak




Slovak (QWERTY)



Slovenian



Spanish



Spanish (Variation)

Country Codes



Swedish




Swiss French



Swiss German



Tatar



Thai (Kedmanee)



Turkish F



Turkish Q



UK English


Country Codes




Ukrainian



US Dvorak



US Dvorak Left



US Dvorak Right



US International



Uzbek



Vietnamese

Country Code Pages

This section provides barcodes for selecting code pages for the country keyboard type selected in Country Codes.

If the default code page in [Country Code Pages](#) is appropriate for your selected country keyboard type, you do not need to scan a country code page barcode.



NOTE: ADF rules can also specify a code page based on the symbology and other ADF criteria. Refer to the Advanced Data Formatting Programmer Guide.

Country Code Page Defaults

The table in this section lists the code page default for each country keyboard.

Table 27 Country Code Page Defaults

Country Keyboard	Code Page Default
US English (North American)	Windows 1252
US English (Mac)	Mac CP10000
Albanian	Windows 1250
Arabic 101	Windows 1256
Arabic 102	Windows 1256
Arabic 102 AZERTY	Windows 1256
Azeri Latin	Windows 1254
Azeri Cyrillic	Windows 1251
Belarusian	Windows 1251
Bosnian Latin	Windows 1250
Bosnian Cyrillic	Windows 1251
Bulgarian Latin	Windows 1250
Bulgarian Cyrillic	Windows 1251
Canadian French Win7	Windows 1252
Canadian French (Legacy)	Windows 1252
Canadian Multilingual	Windows 1252

Table 27 Country Code Page Defaults (Continued)

Country Keyboard	Code Page Default
Croatian	Windows 1250
Chinese ASCII	Windows 1252
Chinese (Simplified)	Windows 936, GBK
Chinese (Traditional)	Windows 950, Big5
Czech	Windows 1250
Czech Programmers	Windows 1250
Czech QWERTY	Windows 1250
Danish	Windows 1252
Dutch Netherland	Windows 1252
Estonian	Windows 1257
Faeroese	Windows 1252
Finnish	Windows 1252
French (France)	Windows 1252
French International (Belgian French)	Windows 1252
Galician	Windows 1252
German	Windows 1252
Greek Latin	Windows 1252
Greek220 Latin	Windows 1253
Greek319 Latin	Windows 1252
Greek	Windows 1253
Greek220	Windows 1253
Greek319	Windows 1253
Greek Polytonic	Windows 1253
Hebrew Israel	Windows 1255
Hungarian	Windows 1250
Hungarian_101KEY	Windows 1250
Icelandic	Windows 1252
Irish	Windows 1252
Italian	Windows 1252
Italian_142	Windows 1252
Japanese ASCII	Windows 1252
Japanese (Shift-JIS)	Windows 932, Shift-JIS
Kazakh	Windows 1251

Table 27 Country Code Page Defaults (Continued)

Country Keyboard	Code Page Default
Korean ASCII	Windows 1252
Korean (Hangul)	Windows 949, Hangul
Kyrgyz Cyrillic	Windows 1251
Latin America	Windows 1252
Latvian	Windows 1257
Latvian QWERTY	Windows 1257
Lithuanian	Windows 1257
Lithuanian_IBM	Windows 1257
Macedonian -FYROM	Windows 1251
Maltese_47KEY	Windows 1252
Mongolian-Cyrillic	Windows 1251
Norwegian	Windows 1252
Polish_214	Windows 1250
Polish Programmer	Windows 1250
Portuguese Portugal	Windows 1252
Russian	Windows 1251
Russian Typewriter	Windows 1251
Serbian Latin	Windows 1250
Serbian Cyrillic	Windows 1251
Slovak	Windows 1250
Slovak QWERTY	Windows 1250
Slovenian	Windows 1250
Spanish	Windows 1252
Spanish Variation	Windows 1252
Swedish	Windows 1252
Swiss French	Windows 1252
Swiss German	Windows 1252
Tatar	Windows 1251
Thai-Kedmanee	Windows 874
Turkish F	Windows 1254
Turkish Q	Windows 1254
Ukrainian	Windows 1251
United Kingdom	Windows 1252

Table 27 Country Code Page Defaults (Continued)

Country Keyboard	Code Page Default
United States	Windows 1252
US Dvorak	Windows 1252
US Dvorak Left Hand	Windows 1252
US Dvorak Right Hand	Windows 1252
US International	Windows 1252
Uzbek Cyrillic	Windows 1251
Vietnamese	Windows 1258

Country Code Page Barcodes

Parameter # 961

Scan the barcode corresponding to the country keyboard code page.



Windows 1250 Latin 2, Central European



Windows 1251 Cyrillic, Slavic




Windows 1252 Latin 1, Western European



Windows 1253 Greek




Windows 1254 Latin 5, Turkish



Windows 1255 Hebrew



Windows 1256 Arabic




Windows 1257 Baltic



Windows 1258 Vietnamese




Windows 874 Thai




Windows 20866 Cyrillic KOI8-R



Windows 932 Japanese Shift-JIS



Windows 936 Simplified Chinese GBK



Windows 54936 Simplified Chinese GB18030



Windows 949 Korean Hangul



Windows 950 Traditional Chinese Big5



MS-DOS 437 Latin US




MS-DOS 737 Greek




MS-DOS 775 Baltic



MS-DOS 850 Latin 1



MS-DOS 852 Latin 2



MS-DOS 855 Cyrillic




MS-DOS 857 Turkish



MS-DOS 860 Portuguese



MS-DOS 861 Icelandic



MS-DOS 862 Hebrew



MS-DOS 863 French Canada




MS-DOS 865 Nordic



MS-DOS 866 Cyrillic



MS-DOS 869 Greek 2



ISO 8859-1 Latin 1, Western European



ISO 8859-2 Latin 2, Central European



ISO 8859-3 Latin 3, South European




ISO 8859-4 Latin 4, North European




ISO 8859-5 Cyrillic



ISO 8859-6 Arabic




ISO 8859-7 Greek



ISO 8859-8 Hebrew



ISO 8859-9 Latin 5, Turkish



ISO 8859-10 Latin 6, Nordic



ISO 8859-11 Thai



ISO 8859-13 Latin 7, Baltic



ISO 8859-14 Latin 8, Celtic




ISO 8859-15 Latin 9



ISO 8859-16 Latin 10, South-Eastern European




UTF-8



UTF-16LE UTF-16 Little Endian



UTF-16BE UTF-16 Big Endian



Mac CP10000 Roman

CJK Decode Control

This section describes control parameters for CJK (Chinese, Japanese, Korean) barcode decode through USB HID Keyboard Emulation mode.



NOTE: Because ADF does not support CJK character processing, there is no format manipulation for CJK output.

CJK Control Parameters

Unicode Output Control

Parameter # 973 (SSI # F2h CDh)

For a Unicode encoded CJK barcode, select one of the following options for Unicode output. Universal Output applies to Unicode and MBCS-expected applications, while Unicode Application Only is limited to Unicode-expected applications.

- **Universal Output to Unicode and MBCS Application:** This default method applies to Unicode and MBCS expected applications, such as MS Word and Notepad on a Windows host.




NOTE: To support Unicode universal output, set up the registry table for the Windows host. See [Unicode/CJD Decode Setup with Windows Host](#).

- **Output to Unicode Application Only** - This method applies only to Unicode expected applications, such as MS Word and WordPad, but not Notepad.



*Universal Output (0)



Unicode Application Only (1)

CJK Output Method to Windows Host

Parameter # 972

For a national standard encoded CJK barcode, select one of the following options for CJK output to a Windows host:

- **Universal CJK Output:** This is the default universal CJK output method for US English IME or Chinese/Japanese/Korean ASCII IME on a Windows host. This method converts CJK characters to Unicode and emulates the characters when transmitting to the host. Use the [Unicode Output Control](#) parameter to control Unicode output.



NOTE: To support universal CJK output, set up the registry table for the Windows host. See [Unicode/CJK Decode Setup Windows Host](#).


- **Other options for CJK output** - With the following methods, the scanner sends the CJK character hexadecimal internal code (Nei Ma) value to the host, or converts the CJK character to Unicode and sends the hexadecimal Unicode value to the host. When using these methods, the Windows host must select the corresponding IME to accept the CJK character. See [Unicode/CJK Decode Setup Windows Host](#).
- **Japanese Unicode Output**
- **Simplified Chinese GBK Code Output**
- **Simplified Chinese Unicode Output**
- **Korean Unicode Code Output**
- **Traditional Chinese Big5 Code Output** (Windows XP)
- **Traditional Chinese Big5 Code Output** (Windows 7)
- **Traditional Chinese Unicode Code Output** (Windows XP)
- **Traditional Chinese Unicode Code Output** (Windows 7)



NOTE: The Unicode emulate output method depends on the host system (Windows XP or Windows 7).




*Universal CJK Output (0)



Japanese Unicode Output (34)



Chinese (Simplified) GBK Output (1)



Chinese (Simplified) Unicode Output (2)



Korean Unicode Output (50)

(for Korean Unicode Output, select Simplified Chinese Unicode IME on the Windows host)



Chinese (Traditional) Big5 Output (Windows XP) (17)



Chinese (Traditional) Big5 Output (Windows 7) (19)



Chinese (Traditional) Unicode Output (Windows XP) (18)



Chinese (Traditional) Unicode Output (Windows 7) (20)

Non-CJK UTF Barcode Output

Parameter # 960

Some country keyboard type layouts contain characters that do not exist in the default code page (see below). Although the default code page can not encode these characters in a barcode, they can be encoded in the UTF-8 barcode.

Scan the following barcode to output the Unicode values by emulation mode.



NOTE: Use this special country keyboard type to decode the non-CJK UTF-8 barcode. After decoding, re-configure the scanner to use the original country keyboard type.

Use US English IME on Windows. See [Unicode Output Control](#).



Non-CJK UTF-8 Emulation Output

Missing Characters for Country Keyboard Type: Tatar, Uzbek, Mongolian, Kyrgyz, Kazakh and Azeri

Default code page: CP1251

Missing characters:

ƒ	ƒ
Ҫ	Ҫ
қ	қ
һ	һ
ə	Ə
ә	Ә
Ү	Ү
Һ	Һ
Ж	Ж
Ғ	
Ң	Ң
Ү	Ү
Қ	Қ
Ұ	Ұ
К	К

Missing Characters for Country Keyboard Type: Romanian (Standard)

Default code page: CP1250

Missing characters:

Ș	Ș
ț	Ț

Missing Characters for Country Keyboard Type: Portuguese-Brazilian (ABNT), Portuguese-Brazilian (ABNT2)

Default code page: CP1252

Missing character: €

Missing Characters for Country Keyboard Type: Azeri-Latin

Default code page: CP1254

Missing characters: ə, Ə

Unicode/CJK Decode Setup with Windows Host

This section describes how to set up CJK decode with a Windows host.

Setting Up the Windows Registry Table for Unicode Universal Output

Set up a Windows host registry table in order to support a universal output method for your data.

1. Select **Start > Run > regedt32** to start the registry editor.
2. Under **HKEY_CURRENT_USER\Control Panel\Input Method**, set **EnableHexNumpad** to 1 as follows:

```
[HKEY_CURRENT_USER\Control Panel\Input Method]
```

```
"EnableHexNumpad"="1"
```

If this key does not exist, add it as type **REG_SZ** (string value).

3. Reboot the computer to implement the registry change.

Adding CJK IME on Windows

Modify your host device to display a Chinese, Japanese, or Korean keyboard.


1. Click **Start > Control Panel**.
2. If the Control Panel opens in category view, select **Switch to Classic View** in the top left corner.
3. Select **Regional and Language Options**.
4. Click the **Language** tab.
5. Under **Supplemental Language Support**, select the **Install Files for East Asian Languages** check box if not already selected, and click **Apply**. This may require a Windows installation CD to install the required files. This step ensures that the East Asian Languages (CJK) are available.
6. Under **Text Services and Input Language**, click **Details**.
7. Under **Installed Services**, click **Add**.
8. In the **Add Input Language** dialog box, choose the CJK input language and keyboard layout or Input Method Editor (IME) to add.

9. Click **OK** twice. The language indicator appears in the system tray (at bottom right corner of the desktop by default). To switch between input languages (keyboard languages) select the language indicator in the system tray.
10. Select the language indicator in the system tray to select the desired country keyboard type.
11. Verify that the characters displayed on each country's keyboard appear.

Selecting the Simplified Chinese Input Method on the Host

You can display a Simplified Chinese keyboard as the input method from the SP20 to display on your Windows 7 / Windows XP host device.

- Select Unicode/GBK input on Windows XP: **Chinese (Simplified) - NeiMa**, then click the input bar to select **Unicode** or **GBK NeiMa** input.

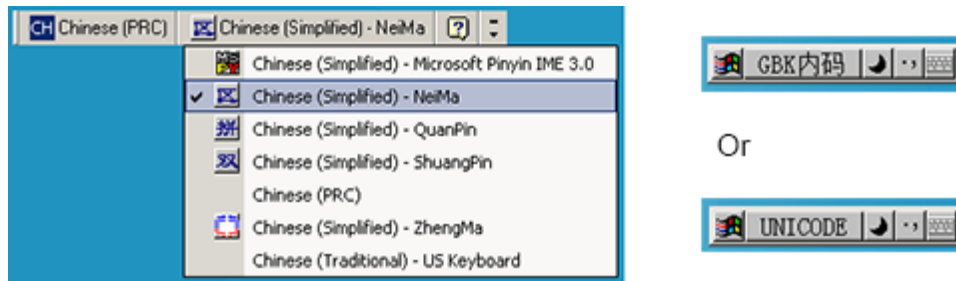


- Select Unicode/GBK input on Windows 7: **Chinese (Simplified) - Microsoft Pinyin New Experience Input Style**, then select **Tool Menu > Secondary Inputs > Unicode Input** or **GB Code Input**.




Selecting the Traditional Chinese Input Method on the Host

To select the Traditional Chinese input method:


- Select Unicode input on Windows XP: **Chinese (Traditional) - Unicode**

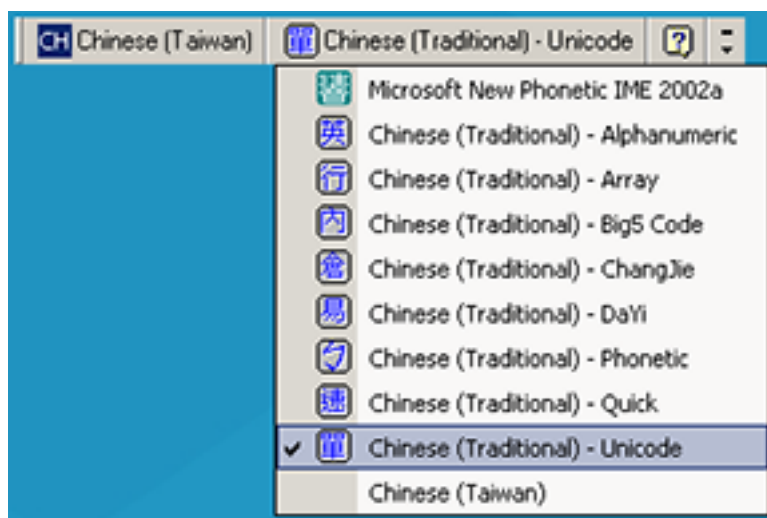

- Select Big5 input on Windows XP: **Chinese (Traditional) - Big5 Code**

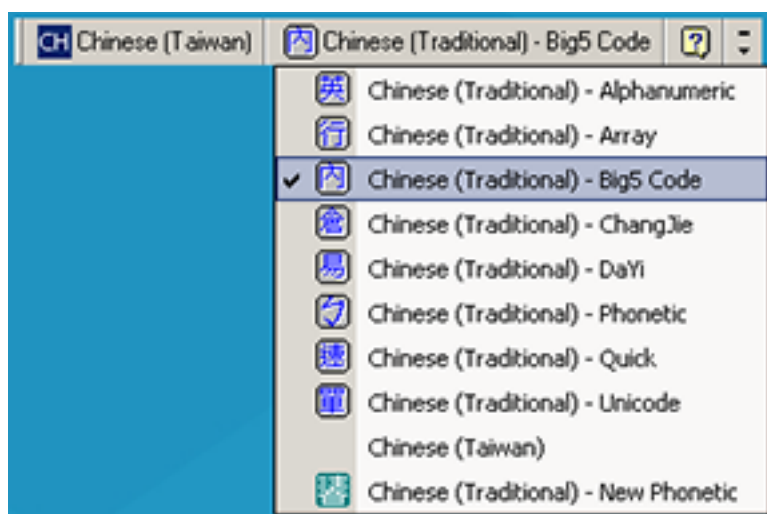

- Select Unicode/Big5 input on Windows 7: **Chinese (Traditional) - New Quick**. This option support both Unicode and Big5 input.

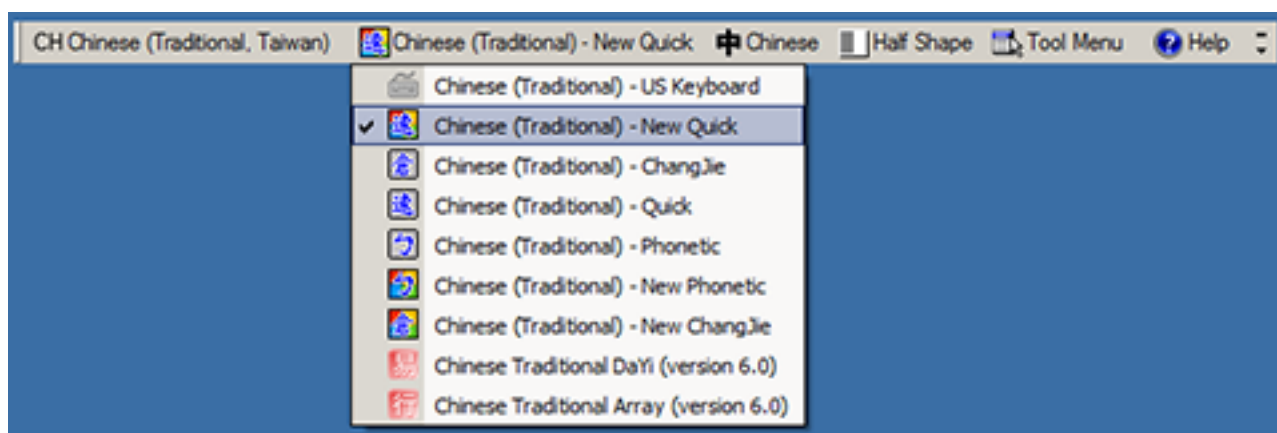

Non-Parameter Attributes

This section defines the scanner's non-parameter attributes.

Model Number

Attribute #533

The model number of the scanner. This electronic output matches the printout on the physical device label.

Type	S
Size (Bytes)	18
User Mode Access	R
Values	Variable

Serial Number

Attribute #534

The unique serial number assigned in the manufacturing facility. This electronic output matches the printout on the physical device label, for example M1J26F45V.

Type	S
Size (Bytes)	16
User Mode Access	R
Values	Variable

Date of Manufacture

Attribute #535 Date of device manufacture assigned in the manufacturing facility. This electronic output matches the printout on the physical device label, for example, 30APR14 (which reads the 30th of April 2014).

Attribute Property	Property Value
Type	S
Size (Bytes)	7

Attribute Property	Property Value
User Mode Access	R
Values	Variable

Date of First Programming

Attribute #614

This attribute contains the date of first electronic programming represents the first time settings were electronically loaded to the scanner either by 123Scan or via SMS, for example 18MAY14 (which reads the 18th of May 2014).

Attribute Property	Property Value
Type	S
Size (Bytes)	7
User Mode Access	R
Values	Variable

Configuration Filename

Parameter # 616

Scanning the Set Defaults barcode resets the configuration filename to factory defaults. The configuration filename changes to Modified upon scanning any parameter barcode to indicate the configuration settings loaded to the device were changed.

Attribute Property	Property Value
Type	S
Size (Bytes)	17
User Mode Access	RW
Values	Variable

Beeper/LED

Attribute #6000

Activates the beeper and/or LED.

Attribute Property	Property Value
Type	X
Size (Bytes)	N/A
User Mode Access	W
Values	See Beeper/LED Values

Table 28 Beeper/LED Values

Beep / LED Action	Value	Beep / LED Action	Value
1 high short beep	0	1 low long beep	15
2 high short beeps	1	2 low long beeps	16
3 high short beeps	2	3 low long beeps	17
4 high short beeps	3	4 low long beeps	18
5 high short beeps	4	5 low long beeps	19
1 low short beep	5	Fast warble beep	20
2 low short beeps	6	Slow warble beep	21
3 low short beeps	7	High-low beep	22
4 low short beeps	8	Low-high beep	23
5 low short beeps	9	High-low-high beep	24
1 high long beep	10	Low-high-low beep	25
2 high long beeps	11	High-high-low-low beep	26
3 high long beeps	12	Green LED off	42
4 high long beeps	13	Green LED on	43
5 high long beeps	14	Red LED on	47
		Red LED off	48

Parameter Defaults

Attribute #6001

This attribute restores all parameters to their factory defaults.

Attribute Property	Property Value
Type	X
Size (Bytes)	N/A
User Mode Access	W

Non-Parameter Attributes

Attribute Property	Property Value
Values	0 = Restore Defaults 1 = Restore Factory Defaults 2 = Write Custom Defaults

Beep on Next Bootup

Attribute #6003

This attribute configures (enables or disables) beep on next boot up of scanner.

Attribute Property	Property Value
Type	X
Size (Bytes)	N/A
User Mode Access	W
Values	0 = Disable beep on next bootup 1 = Enable beep on next bootup

Reboot

Attribute #6004

This attribute initiates a device reboot.

Attribute Property	Property Value
Type	X
Size (Bytes)	N/A
User Mode Access	W
Values	N/A

Host Trigger Session

Attribute #6005

This attribute triggers a decode session.

Attribute Property	Property Value
Type	X
Size (Bytes)	N/A
User Mode Access	W
Values	1 = Start Host Trigger Session 0 = Stop Host Trigger Session

Firmware Version

Parameter # 20004

Non-Parameter Attributes

This parameter returns the scanner's operating system version. For example, NBRFMAAC or PAAAABS00-007-R03D0.

Attribute Property	Property Value
Type	S
Size (Bytes)	Variable
User Mode Access	R
Values	Variable

Scankit Version

Attribute #20008

Identifies the 1D decode algorithms resident on the device, for example SKIT4.33T02.

Attribute Property	Property Value
Type	S
Size (Bytes)	Variable
User Mode Access	R
Values	Variable


Sample Barcodes

This section provides sample barcodes.

Sample Code 39




Sample Code 93

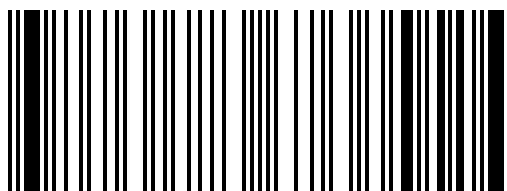


Sample UPC/EAN

UPC-A, 100%

Figure 7 01233456789




UPC-A Plus 2




Sample Barcodes


UPC-A Plus 5

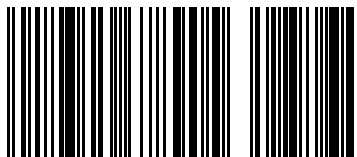


UPC-E




UPC-E Plus 2

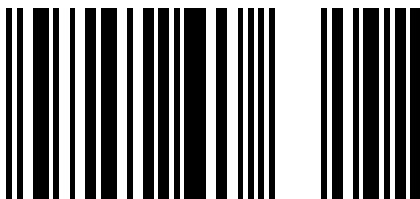


UPC-E Plus 5




EAN-8



EAN-13, 100%




EAN-13 Plus 2

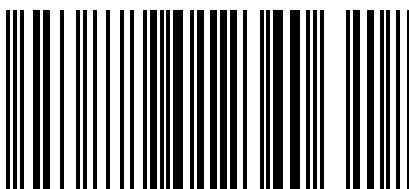

Sample Barcodes

EAN-13 Plus 5

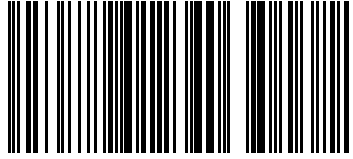

Sample Code 128



Sample Interleaved 2 of 5



Sample Chinese 2 of 5



Sample Korean 3 of 5




Sample GS1 DataBar

GS1 DataBar Omnidirectional



NOTE: GS1 DataBar Omnidirectional must be enabled to read the following barcode (see [GS1 DataBar Omnidirectional \(formerly GS1 DataBar-14\)](#)).



GS1 DataBar Limited




NOTE: DataDataBar Limited must be enabled to read the following barcode (see [GS1 DataBar Limited](#)).




GS1 DataBar Expanded



NOTE: DataBar Expanded must be enabled to read the following barcode (see [GS1 DataBar Expanded](#)).

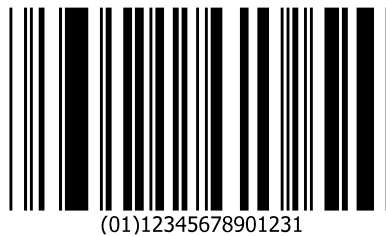

Sample PDF417



Sample Data Matrix



123456789abcdefghijklmnopqrstuvwxyz

Sample Aztec




0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZ
WXYZ01234567890123456789ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789ABCDEFGHI
JKLMNOPQRSTUVWXYZ0123456789


Sample Grid Matrix




NOTE: Grid Matrix must be enabled to read the following bar code (see [Grid Matrix](#)).



Sample GS1 DataBar Truncated

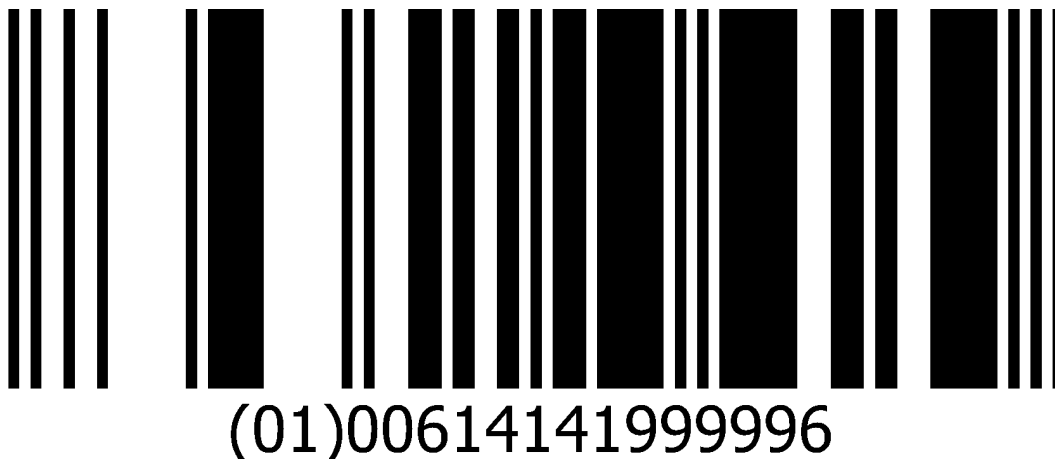

Sample GS1 DataBar Stacked OmniDirectional

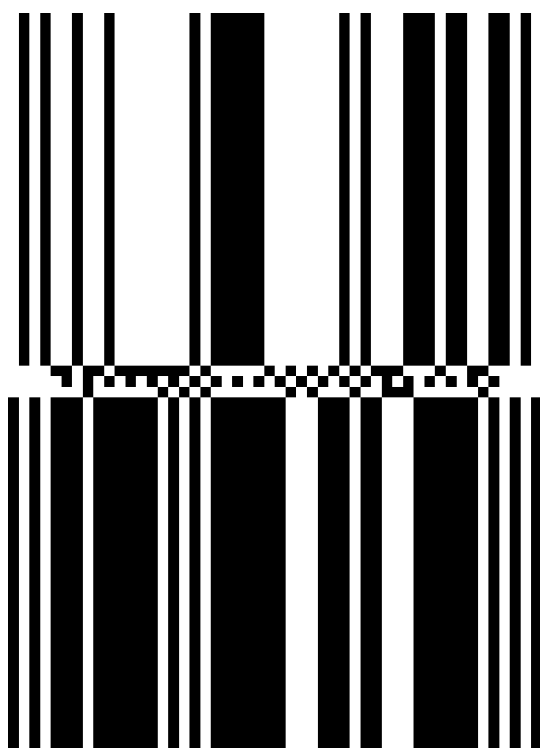

Sample GS1 DataBar Expanded Stacked Barcode



Sample GS1 DataBar Expanded



MSI Two Check Digits




Sample GS1-128




2D Symbolologies

The following parameters are specific to 2D Symbolologies.

Sample GS1 Data Matrix

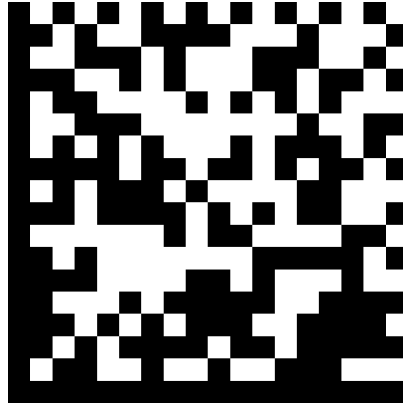

Sample QR Code




0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZ012345
6789


Sample GS1 QR



Sample MicroQR

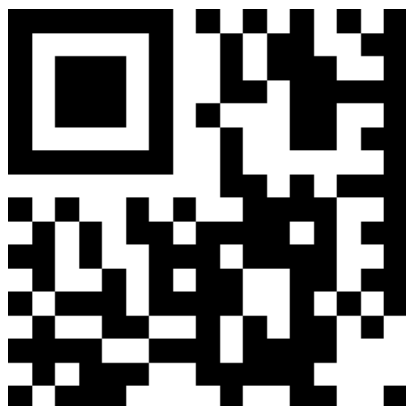

Sample Han Xin

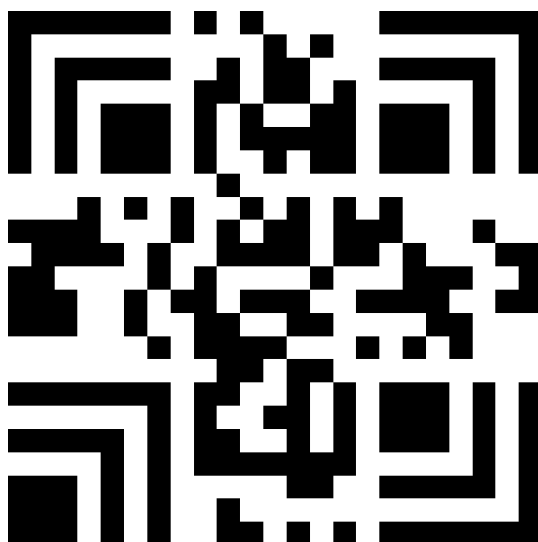

Sample Grid Matrix



NOTE: Grid Matrix must be enabled to read the following bar code (see [Grid Matrix](#)).

