


Specifications



Photo is representative

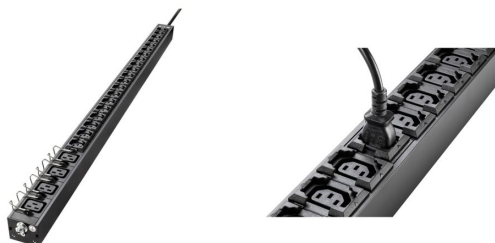

Eaton FLXTBAC20C2

Eaton Basic FlexPDU G2, 0U, 22U, C20 input, 2.5m cord, 1ph, 3.7kW, 16A, 200-240V, 24 outlets (20)C13, (4)C19

General Specifications

PRODUCT NAME	Eaton Flex PDU G2
CATALOG NUMBER	FLXTBAC20C2
PRODUCT LENGTH/DEPTH	44.4 mm
PRODUCT HEIGHT	967 mm
PRODUCT WIDTH	52 mm
PRODUCT WEIGHT	1.9 kg
COMPLIANCES	LVD Directive (CB) EMC Directive RoHS Directive REACH WEEE Directive Packaging Directive
CERTIFICATIONS	EN IEC 63000 EN 55032 RCM Ukr CE EAC Cm IEC 62368-1
EAN	3553340697357
MODEL CODE	PDU FLXG2 BA 0U C20 1P 16A 20xC13,4xC19



Powering Business Worldwide

Product specifications

SPECIAL FEATURES

- Locking outlets
- Pure copper used for main circuit conductors
- High-temperature resilience up to 50°C

TYPE	Rack PDU
FORM FACTOR	0U (Vertical)
OUTLET CONTROL	No

PACKAGE CONTENTS

- Rack PDU
- Mounting accessories
- Quickstart guide
- Safety Instructions

OPERATING TEMPERATURE	32° to 122°F (0° to 50°C)
MOUNTING DIRECTION	Vertical
COLOR	Black
INPUT CONNECTION	C20
CORD LENGTH	2.5m
WATTAGE	3.7 kW max
AMPERAGE RATING	16A
ELECTRIC CURRENT - MAX	16A
INPUT VOLTAGE	200-240V
PHASE	Single-phase
FREQUENCY RATING	50/60 Hz
OUTLETS	24 outlets (20)C13 (4)C19
NUMBER OF OUTPUTS 5-15R	0
NUMBER OF OUTPUTS 5-20R	0
NUMBER OF OUTPUTS 6-15R	0
NUMBER OF OUTPUTS 6-20R	0
NUMBER OF OUTPUTS L14-30R	0
NUMBER OF OUTPUTS L5-20R	0
NUMBER OF OUTPUTS L5-30R	0
NUMBER OF OUTPUTS L6-20R	0

Resources

BROCHURES

[Eaton FlexPDU G2 Brochure](#)

[Eaton FlexPDU G2 Quick Start Guide](#)

DECLARATIONS OF CONFORMITY

[Eaton FlexPDU G2 EU Declaration of Conformity](#)

DRAWINGS

[FlexPDU G2 FLXTBAC20C2 model drawing](#)

MANUALS AND USER GUIDES

[Eaton FlexPDU G2 management operation instructions](#)

NUMBER OF OUTPUTS L6-30R	0
NUMBER OF OUTPUTS C13	20
NUMBER OF OUTPUTS C19	4
NUMBER OF OUTPUTS C20	0
NUMBER OF OUTPUTS HARDWIRED	0
NUM OF OUTPUTS PC (SCHUKO)	0
NUMBER OF OUTPUTS (OTHER)	0
NUMBER OF OUTLETS WITH EARTH PIN	24
NO OF OUTLET SUISSE STNDRD TYPE13	0
NO OF OUTLET SUISSE STNDRD TYPE15	0
NO OF OUTLET SUISSE STNDRD TYPE23	0
NO OF OUTLET SUISSE STNDRD TYPE25	0
NUMBER OF UK BS1363 SOCKETS	0
CIRCUIT BREAKER	0
SNMP	Yes
ELECTRICAL CONNECTION	Connecting cord with plug
EVALUATION	Other
MOUNTING DIMENSION (METRICAL)	967
MOUNTING DIMENSION (STANDARDIZED)	Other
SWITCHABLE	No
OVER VOLTAGE CATEGORY	2
AMPEREMETER	No
WITH SURGE PROTECTION MODULE	No
FITTED WITH:	Mounting material
NUMBER OF USB CONNECTIONS	0
NUMBER OF RJ45 SOCKETS	0
ACCESSORY	No

PROJECT NAME:
PROJECT NUMBER:
PREPARED BY:
DATE:



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

