



SELLING POINTS

- The latest 5th-Gen QD-OLED Panel – With stunning image quality and fast response time.
- MSI M-Mate App brings intuitive monitor control to your fingertips, bridging the gap between your monitor and Mac.
- 5-layer tandem OLED panel with EL Gen 3 technology – Light efficiency up to 30%.
- DarkArmor Film- Delivers 40% deeper blacks and a 2.5x more scratch-resistant screen surface.
- Uniform Luminance - HDR Curve Customization allowing you to customize the HDR curve and enjoy a smoothly uniform HDR experience.
- MSI OLED Care 3.0 – AI Care Sensor reduced the risk of OLED image sticking / burn-in.
- Built-in dual USB Type-C connection with 98W & 15W power delivery allows you to effortlessly ...

FEATURES



QD-OLED Display

MSI's renowned QD tech, combined with the latest OLED panel technology, these displays exhibit the best picture quality and incredible high contrast when gaming



5th-gen QD-OLED

The 5th-gen Tandem QD-OLED pixel arrangement utilizes the RGB Stripe layout, fundamentally elevating display quality. This design minimizes color fringing and significantly enhances the clarity of text.



VisiClarity

VisiClarity masterfully integrates Anti-Glare Low Reflection technology to eliminate distracting light, providing a window of pure, undisturbed depth.



DarkArmor Film

Delivers 40% deeper blacks and a 2.5x more scratch-resistant screen surface.



AI Care Sensor


AI Care integrates AI sensors to dynamically optimize OLED protection based on real-time usage, making the system even smarter.



Dual Type-C 98W/ 15W PD

Built-in an USB Type-C connection with 98W power delivery allows you to effortlessly connect to and charge your devices.

CONNECTIONS

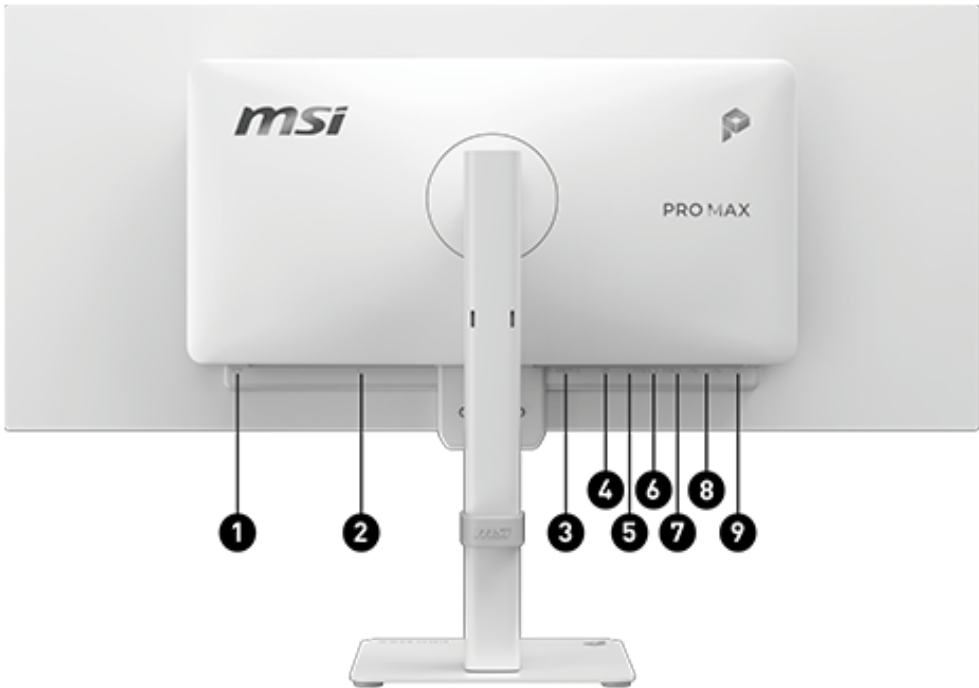

1. Kensington Lock

3. 2x HDMI™ 2.1 (FRL 12G) (UWQHD@144Hz)

5. 1x Type-C (DP alt.) w/ 98W PD

7. 1x USB 5Gbps Type-B

9. 1x Headphone-out
2. AC-in

4. 1x DisplayPort 1.4a (HBR3)

6. 1x Type-C (DP alt.) w/ 15W PD

8. 4x USB 5Gbps Type-A

SPECIFICATIONS

I/O ports	2.3 1 2.3 1 4 1 3Wx 2 2 2.1 (FRL 12G) 1.4a (HBR3) 2
Screen Size	34" (86.36 cm)
Active Display Area (mm)	800.06(H) x 337.06(V)
Curvature	Flat
Panel Type	QD-OLED
Resolution	3440x1440 (UWQHD)
Pixel pitch (mm)	0.2315(H)x0.2315(V)
Aspect Ratio	21:9
Dynamic Refresh Rate technology	AMD FreeSync™ Premium Pro
Dynamic Refresh Rate Activated Range	48~144Hz
HDR (High dynamic range)	VESA DisplayHDR True Black 500
SDR Brightness (nits)	300
HDR Brightness (Peak nits)	1300
Contrast Ratio	1500000:1
DCR (Dynamic Contrast Ratio)	TBD
Signal Frequency	237.2~239 KHz(H) / 48~144 Hz(V)
Refresh Rate	144HZ
Response Time (MPRT)	TBD
Response Time (GTG)	0.03ms
View Angles	178°(H)/178°(V)
sRGB (CIE1976 area percentage/overlap)	136.4%/99.8%



BUSINESSPRODUCTIVITYMONITORS

PRO MAX 341QPXW14G

Adobe RGB (CIE1976 area percentage/overlap)	116.9%/97.4%
DCI-P3 (CIE1976 area percentage/overlap)	108.6%/99%
Quantum Dot Film	TBD
Surface Treatment	Anti-Glare Low Reflection
Touch Screen	Non-touch
Display Colors	1.07B
Color bit	10 bits
Local Dimming	TBD
Lock type	Kensington Lock
Power type	Internal Power Board
Power Input	100~240V, 50/60Hz
Adjustment (Tilt)	-5° ~ 20°
Adjustment (Swivel)	-30° ~ 30°
Adjustment (Height)	0 ~ 130 mm
Adjustment (Pivot)	-10° ~ 10°
VESA Mounting	100x100mm
Stand with Integrated Mini PC Mount	v
Accessories	2.1 0 1 0 1 0 0 0 0 1 0 1 0 0 4 (M4x8)/4 (M4x10) 0 0 0 0 1 1.4a 1
Note	v v v v v KVM 2.0 Support Delta E ≤ 2 (Pre-Calibration) VESA DisplayHDR True Black 500 VESA ClearMR 8000 AI Vision 3.0 3440 x1440 (Up to 144Hz) 3440 x 1440 (Up to 144Hz) DP Signal C13 YES Type C 1 98W / Type C 2 15W M4x8mm / M4x10mm