


5-Port 2.5G PoE Switch

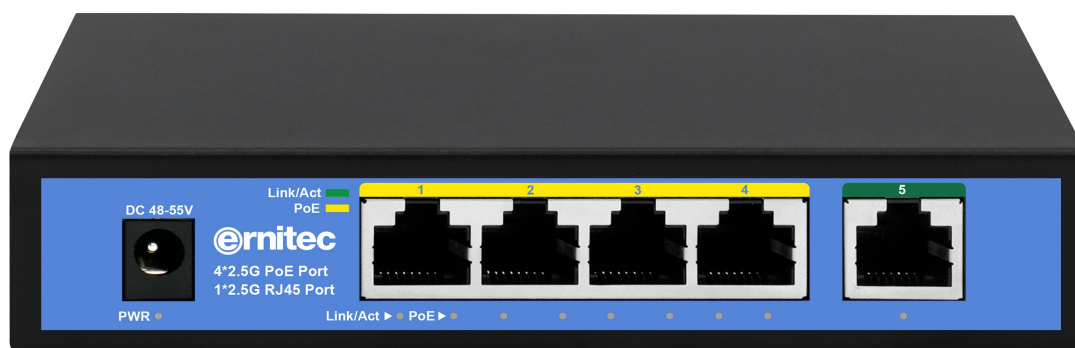

Product Highlights

- 4*2.5Gbps PoE ports+1*2.5Gbps RJ45 port
- Comply with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3bz, and IEEE 802.3x standards
- Ethernet Ports support 10M/100M/1G/2.5Gbps self-adaptive
- Support automatic port flipping (Auto MDI/MDIX)
- The panel indicator LEDs will monitor the working status and assist in fault analysis
- Flow control method, IEEE802.3x standard for full duplex and Backpressure standard for half duplex

Hardware Features

Description	Specification
Model	ELECTRA-U05-2.5GB-65W
Interface	4*2.5Gbps PoE ports 1*2.5Gbps RJ45 port
Port Standard	IEEE802.3 (Ethernet) IEEE802.3u (Fast Ethernet) IEEE802.3ab (Gigabit Ethernet) IEEE 802.3bz (2.5G Ethernet) IEEE 802.3z (Gigabit Ethernet) IEEE802.3x (Flow Control)
Switching Bandwidth	25Gbps
Packet Forwarding Rate	18.6Mpps
Packet Buffer	8Mbit
MAC Address Table	4K
Transmission Method	Store and Forward
PoE Standard	IEEE802.3af (15.4W) IEEE802.3at (30W)
PoE Port Output Voltage	DC 44-57V
PoE Ports	Ports 1-4 PoE power output <30W
PoE Power Budget	58W
Power Supply	AC 100-240V 50/60Hz DC 52V1.25A
Mainboard Power Consumption	6.06W
Structure Information	Product Dimensions: 140*93*28mm Packaging Dimensions: 245*190*60mm Product Net Weight: 0.3KG Product Gross Weight: 0.76KG
Packing Information	Carton Dimensions: 520*300*340mm Packing Quantity: 20PCS Packing Weight: 16.2KG
Package Contents	Switch 1pcs, AC Adapter 1pcs, Manual 1pcs, Certificate of Inspection 1pcs, Power Cord 1pcs
Fan Quantity	0
Installation	Desktop

Hardware Features

Description	Specification
Surge Protection	Port Surge: Common mode 4KV, Differential mode 2KV (Class A) Electrostatic ESD: Air 8KV, Contact 6KV (Class C) Power Supply: Common mode 4KV, Differential mode 4KV (Class A)
Operating Temperature	0~40°C
Storage Temperature	-40~70°C
Operation Humidity	10%~90%, non condensing
Storage Humidity	5%~95%, non condensing
PWR Green LED	On: Powered on Off: Powered off
Ports 1-5	Green LED on: 2.5Gbps Link normal Yellow LED on: 10/100/1000Mbps Link normal Off: Link blocked Flashing: Data transmitting
PoE Yellow LED	On: PoE powered on Off: PoE powered off

Product Structure Diagram

