



NO.

| 标记 | 处数 | 分区 | 更改 | 日期 |
|----|----|----|----|----|
| | | | | |


LENGTH

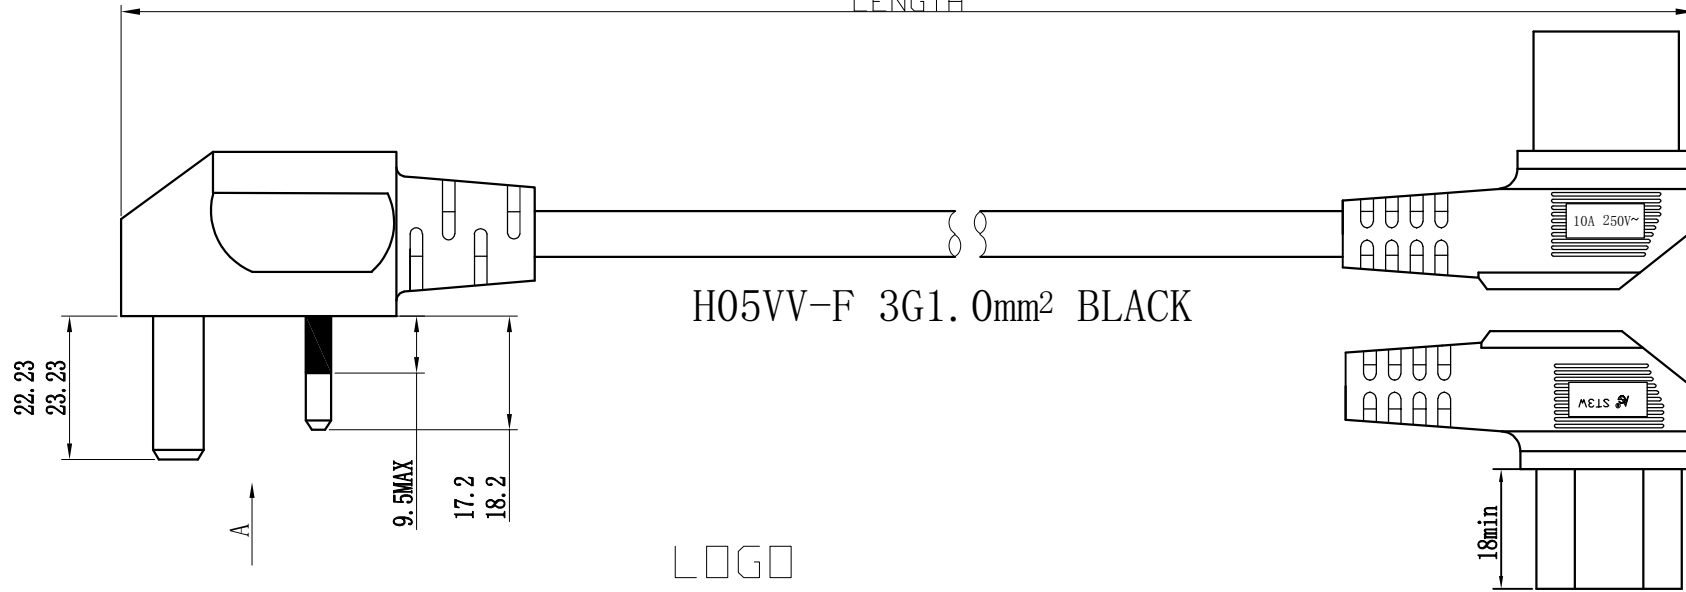


A Direction

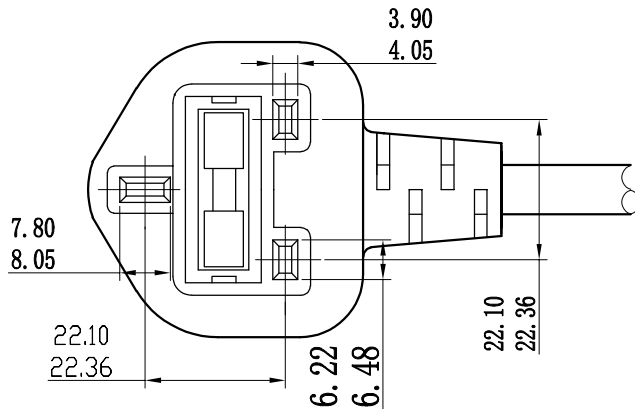

LOGO

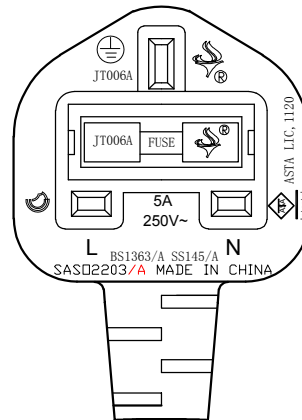

B Direction

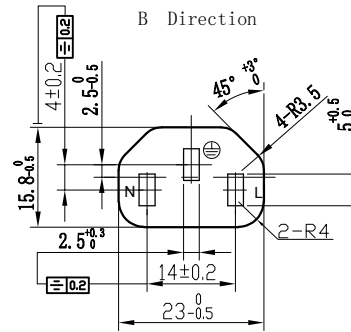

B

| | | | |
|-------------|---------|---------|-------|
| NO. | 27-0101 | 27-0037 | |
| LENGTH (mm) | 5000 | 3000 | 5000 |
| COLOR | BLACK | BLACK | BLACK |

Notes:

1. Plug: JT006A/ST3W Clear injection no scratch and dirt;
2. Cable: H05VV-F 3G1.0mm² Jacket $\phi 7.0 \pm 0.2$ Conductor 32*0.198±0.004 Core $\phi 2.5 \pm 0.1$
Cable Mark: <VDE> H05VV-F 3G1.0mm²
3. Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than 5M Ω , no strike out;

| 尺寸标注 | | 公差 | | 第三角度投影 | | | 第X张 共X张 | | |
|--|-------|----------------------------|-------------|--------|-----|------|---------|-----|----|
| TOLERANCE ACCORDING TO THIS FORM - UNLESS OTHERWISE DESIGNATED | | THE THIRD ANGLE PROJECTION | | 版本 | 比例 | 单位 | 材料 | 图号 | 图幅 |
| 公差 | 角度 | 版本 | A | 比例 | 1:1 | UNIT | mm | HPS | A4 |
| LENGTH | ANGLE | FILE LOCATION | | | | | | | |
| <200 | ±0.1 | ±0.5° | | | | | | | |
| 200~500 | ±0.3 | | | | | | | | |
| 500~800 | ±0.5 | | | | | | | | |
| >800 | ±1.0 | | | | | | | | |
| DESIGN | | 产品名称 | JT006A/ST3W | | | | | | |
| MARK | | PRODUCTOR NAME | JT006A/ST3W | | | | | | |
| APPROVAL | | | | | | | | | |