NO.

标记	处数	分区	更改	日期

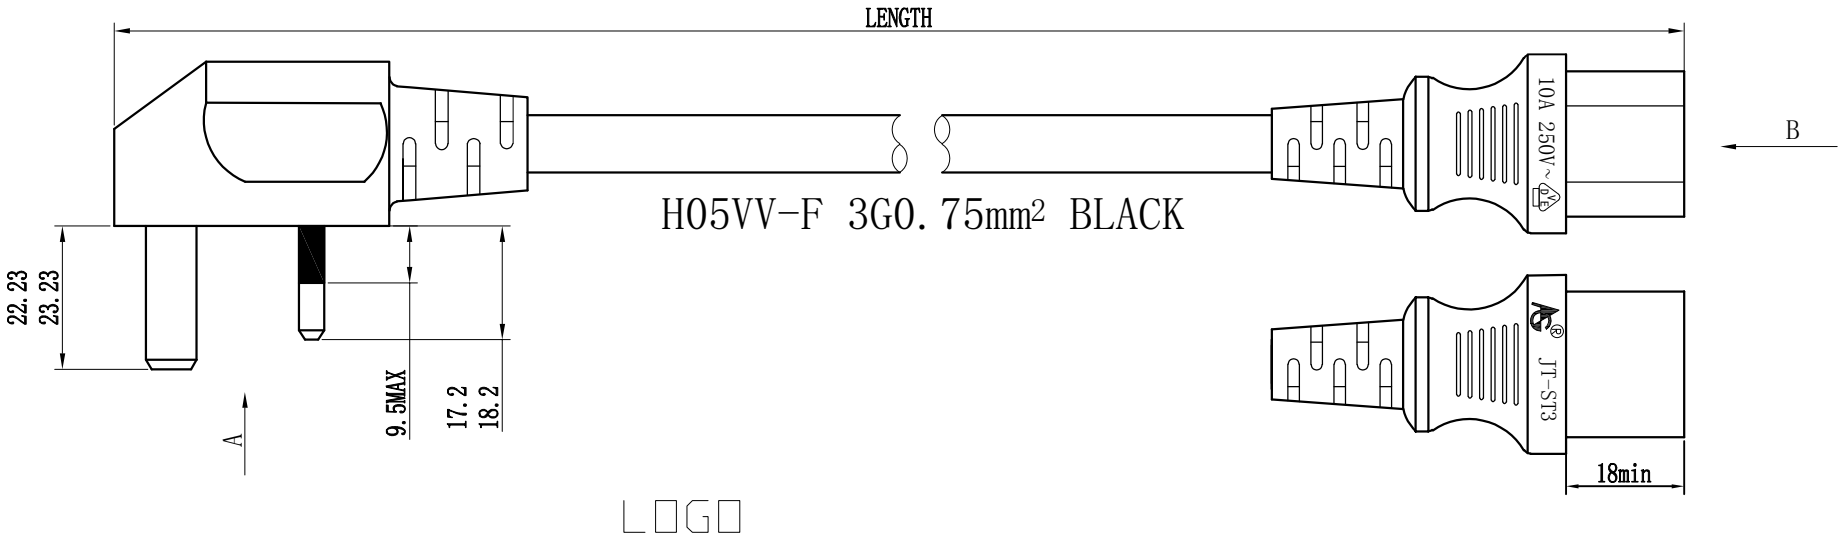

A Direction

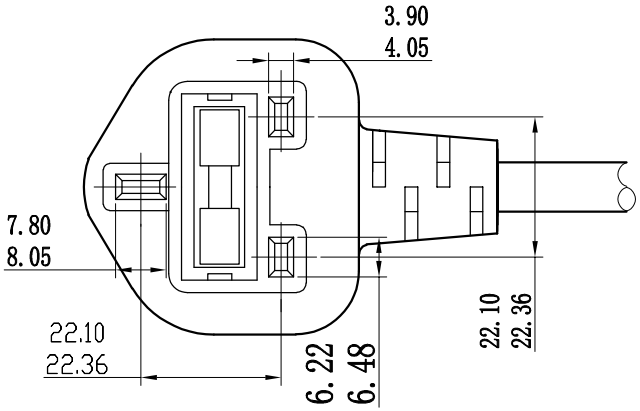

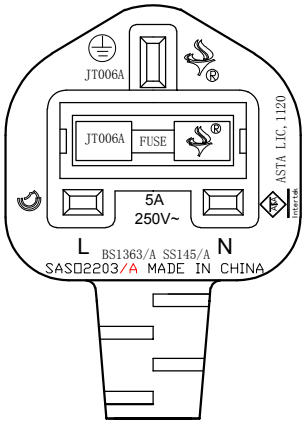

B Direction

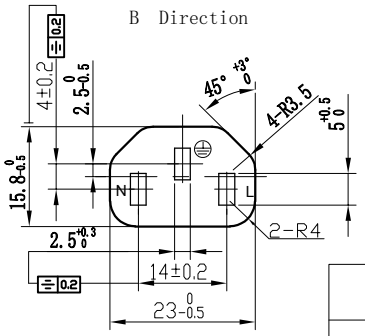

NO.	27-0061B	27-0084B	27-0110
LENGTH(mm)	1000	500	1800
COLOR	BLACK	BLACK	BLACK

Notes:

1. Plug: JT006A/JT-ST3 Clear injection no scrath and dirt;
2. Cable: H05VV-F 3G0.75mm² Jacket Φ6.5±0.2 Conductor 24*0.198±0.004 Core Φ2.4±0.1
   Cable Mark: ◁VDE▷ H05VV-F 3G0.75mm²
3. Test: Hi-pot: lnner Voltage AC2500V/1S External Voltage AC4000V/1S
   current leakage 1mA, insulation resistance no less than 5MΩ, no strike out;

除非另有说明，首明公差按下表：
TOLERANCE ACCORDING TO THIS FORM UNLESS OTHERWISE INDICATED

尺寸标注 DIMENSION	公差 TOLERANCE 长度 LENGTH	角度 ANGLE
<200	±0.1	±0.5°
200~500	±0.3	
500~800	±0.5	
<800	±1.0	

第三角度投影 THE THIRD ANGLE PROJECTION			第X张 共X张		
版本 VERSION	A	比例 PROPORTION	1:1	单位 UNIT	mm
图幅 MAPS	A4				
文件位置 FILE LOCATION					
面号 FIGURE NO		树脂材料 RESIN MATERIALS			
模号 DIE NO.		收缩率 SHRINKAGE			
设计 DESIGN		产品名称 PRODUCTOR NAME	JT006A/JT-ST3		
审核 AUDIT					
批准 APPROVAL					