



PLUS SERIES

Pro Essentials.

CL2P Standard HDMI® Cable

Installation in plenum spaces—such as those found in schools, hospitals, and commercial buildings—can be challenging due to strict building code requirements. This CL2P Standard HDMI® Cable is specifically designed to meet those standards, making it a reliable solution for commercial, industrial, educational, and healthcare environments.

Its gripping HDMI connectors offer enhanced port retention, reducing the risk of accidental disconnection—without the need for locking sockets, tie-downs, or screws.

Whether you're streaming video or delivering a presentation, this cable ensures crisp audio and pristine high-definition video, helping you make every presentation count. It's the ideal choice for maintaining signal integrity in demanding environments.





PLUS SERIES

Pro Essentials.

CL2P Standard HDMI® Cable

FEATURES

- CL2P Plenum rated jacket
- Gripping connectors
- Supports up to 1080p @60Hz video resolution
- Gold plated connectors

Plus Series CL2P Standard HDMI® Cable	
42528 or CG42528†	15ft (4.5m) C2G Plus Series CL2P Standard HDMI® Cable - Plenum Rated
42529 or CG42529†	25ft (7.6m) C2G Plus Series CL2P Standard HDMI® Cable - Plenum Rated
42530 or CG42530†	35ft (10.7m) C2G Plus Series CL2P Standard HDMI® Cable - Plenum Rated
42531 or CG42531†	40ft (12.2m) C2G Plus Series CL2P Standard HDMI® Cable - Plenum Rated
42532 or CG42532†	50ft (15.2m) C2G Plus Series CL2P Standard HDMI® Cable - Plenum Rated

†Note: Some legacy systems use the 5-digit part number while others use the CG notation for numbers. Contact your Legrand AV sales representative with questions.



PLUS SERIES

Pro Essentials.

TECHNICAL DRAWING

ELECTRICAL SPECIFICATIONS	Conductor Resistance	at 20°C Max 24AWG: 94.2Ω/KM
	Impedance	100±10 Ω
PHYSICAL CHARACTERISTICS	Operating Temperature	0° to 50° C; 10-85% Relative Humidity
	Storage Temperature	-25°C to +70°C
	Connectors	HDMI Male
	Minimum Bend Radius	135mm
	Contacts	Gold Plated; Gold Flash Shell
	Cable Diameter	9mm±0.5mm
	Cable Gauge	24AWG
	Shield	Aluminum Foil - 100% Coverage / Braid - Tinned Copper (24/7/0.12mm)
	Port Retention	6.6lbs Minimum Withdraw Force
	Jacket Rating	CL2P
	Contact Material	Gold Flashing
	Regulatory Approvals	Product is CE Marked and Conforms to 2011/65/EU ROHS 2






PLUS SERIES

Pro Essentials.

TECHNICAL DRAWING

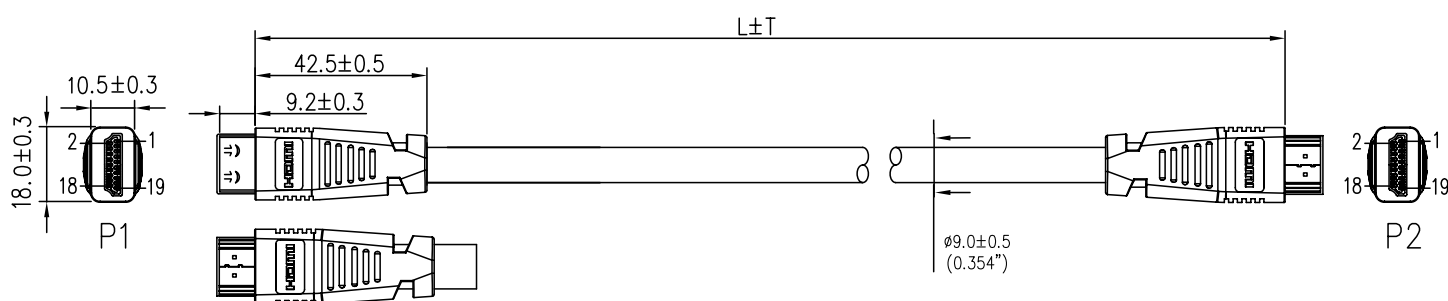

C2G | CHIEF | CONNECTRAC | DA-LITE | LUXUL | MIDDLE ATLANTIC | ON-Q | SANUS | VADDIO | WIREMOLD

©2025 Legrand AV Inc. 240039 Rev B 10/25 C2G, Chief, Da-Lite, Luxul, Middle Atlantic, On-Q, Sanus, Vaddio and Wiremold registered trademarks of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

USA 866.977.3901 av.support@legrand.com
CANADA 877.345.4329 av.support@legrand.com
EMEA +31 495 580 840 av.emea.sales@legrand.com
APAC +852 2145 4099 av.asia.sales@legrand.com