


# Delock 2.5" Converter SATA 22 pin > 1 x mSATA / 1 x CFAST - 9.5 mm

## Description

This converter by Delock enables the connection of an mSATA SSD in half size or full size format or a CFAST memory card. If both slots are occupied, only the mSATA SSD can be used. The converter can be installed into the system through the SATA interface.

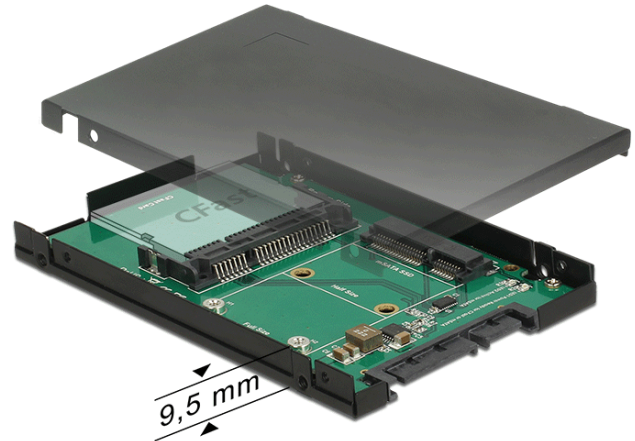

## Specification

- Connectors:  
1 x SATA 6 Gb/s 22 pin plug >  
1 x mSATA slot (half size / full size)  
1 x CFAST slot
- Supports CFAST 1.0 and 2.0
- Maximum power for modules: 4 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- LED indicator
- Dimensions (LxWxH): ca. 100 x 70 x 9.5 mm

## System requirements

- A free SATA interface

## Package content

- Converter SATA > mSATA / CFAST
- Mounting material
- User manual

## Item No. 62862


EAN: 4043619628629

Country of origin: Taiwan, Republic of China

Package: Retail Box



## Images



General	
LED indicator:	power and activity
Supported memory card:	CFast 1.0 and 2.0
Protection:	ESD (Electrostatic Discharge) Short circuit protection Overheating protection
Interface	
connector 1:	1 x SATA 6 Gb/s 22 pin plug
connector 2:	1 x mSATA slot
connector 3:	1 x CFast slot
Physical characteristics	
Length:	100 mm
Width:	70 mm
Height:	9.5 mm