

INSTALLATION INSTRUCTIONS

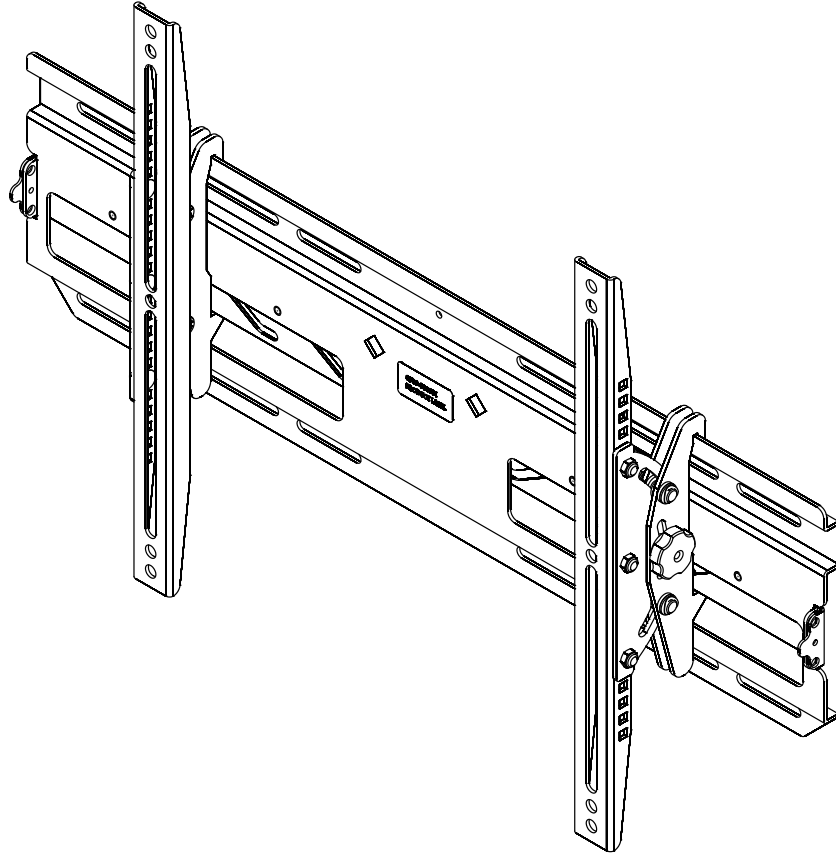


Outdoor Universal Tilting Wall Mount


CHIEF[®]

A brand of **legrand**

ODMLT

LEGEND

	Tighten Fastener
	Apretar elemento de fijación
	Befestigungsteil festziehen
	Apertar fixador
	Serrare il fissaggio
	Bevestiging vastdraaien
	Serrez les fixations

	Loosen Fastener
	Aflojar elemento de fijación
	Befestigungsteil lösen
	Desapertar fixador
	Allentare il fissaggio
	Bevestiging losdraaien
	Desserrez les fixations

	Phillips Screwdriver
	Destornillador Phillips
	Kreuzschlitzschraubendreher
	Chave de fendas Phillips
	Cacciavite a stella
	Kruiskopschroevendraaier
	Tournevis à pointe cruciforme

	Open-Ended Wrench
	Llave de boca
	Gabelschlüssel
	Chave de bocas
	Chiave a punte aperte
	Steeksleutel
	Clé à fourche

	By Hand
	A mano
	Von Hand
	Com a mão
	A mano
	Met de hand
	À la main

	Hex-Head Wrench
	Llave de cabeza hexagonal
	Sechskantschlüssel
	Chave de cabeça sextavada
	Chiave esagonale
	Zeskantsleutel
	Clé à tête hexagonale

	Pencil Mark
	Marcar con lápiz
	Stiftmarkierung
	Marcar com lápis
	Segno a matita
	Potloodmerkteken
	Marquage au crayon

	Drill Hole
	Perforar
	Bohrloch
	Fazer furo
	Praticare un foro
	Gat boren
	Percez un trou


	Adjust
	Ajustar
	Einstellen
	Ajustar
	Regolare
	Afstellen
	Ajuster

	Remove
	Quitar
	Entfernen
	Remover
	Rimuovere
	Verwijderen
	Retirez

	Optional
	Opcional
	Optional
	Opcional
	Opzionale
	Optie
	En option

	Security Wrench
	Llave de seguridad
	Sicherheitsschlüssel
	Chave de segurança
	Chiave di sicurezza
	Veiligheidssleutel
	Clé de sécurité

TOOLS REQUIRED FOR INSTALLATION



7/32" - wood stud
1/4" - concrete




1/2" (12.7mm) - wood stud
3/8" (9.5mm) - concrete



#2


PARTS

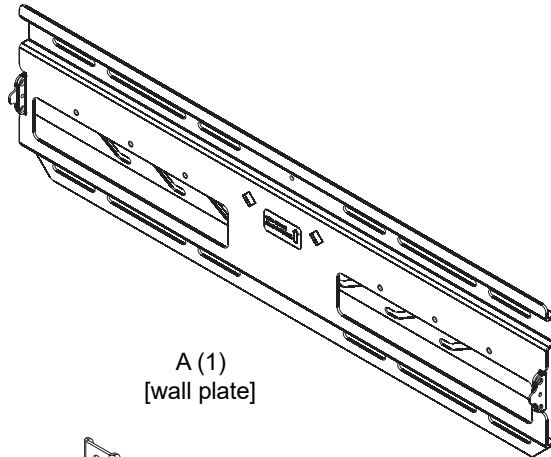

A (1)
[wall plate]



B (1)
[left interface bracket]




C (1)
[right interface bracket]



D (4)
5/16 x 3 1/2"



E (4)
5/16"



5/16 x 3" Buildex Tapcon® anchors
with Blue Climaseal® coating
(not included)




F (4)
M8 x 20mm



G (4)
M8 x 30mm



H (4)
M6 x 16mm




J (4)
M6 x 25mm



K (4)
M5 x 16mm



L (4)
M5 x 20mm




M (4)
M5 x 25mm



N (4)
M4 x 16mm



P (4)
M4 x 20mm



Q (4)
M4 x 25mm



R (4)
12.7mm



T (4)
6.40mm



U (4)
#10



V (4)
1/4"

ASSEMBLY and INSTALLATION

INSPECT MOUNT BEFORE ASSEMBLY

1. Carefully inspect the mount components for shipping damage.
2. If any damage is apparent, call your carrier claims agent and do not continue with the installation until the carrier has reviewed the damage.

NOTE: Read all assembly instructions before starting the installation process.

Wall Plate Installation

IMPORTANT ! : The ODMLT mounts are designed to be mounted to a 2" x 4" wood studs (16" or 24" on center) wall with a maximum covering of 5/8" thick drywall, plywood, OSB, fiberboard, buffalo board or other similar sheathing materials.

IMPORTANT ! : The ODMLT mounts may be installed to a bare 8" solid concrete wall if 5/16 x 3" Buildex® Tapcon® anchors with Blue Climaseal® coating (not included) are used in place of lag bolts (D) provided. **Do not install the ODMLT mounts to a hollow block concrete wall.**

Wood Stud Installation



WARNING: It is the responsibility of the installer to verify that the structure to which the mount is anchored will safely support five times the combined load of all attached components and equipment.

1. Determine a suitable mounting location and lift the wall plate (A) into mounting position on wall.
2. Using a small nail or screw (not provided) in the center hole, lightly support the wall plate at the mounting location. (See Figure 1)
3. Level the wall plate (A) and drill 7/32" pilot holes for anchoring the wall plate. Holes must be drilled at the center of wood studs. (See Figure 1) or (See Figure 2)
4. Using four 5/16 x 3 1/2" lag bolts (W) and four 5/16" washers (X), install the wall plate (A) on the wall. (See Figure 1) or (See Figure 2)

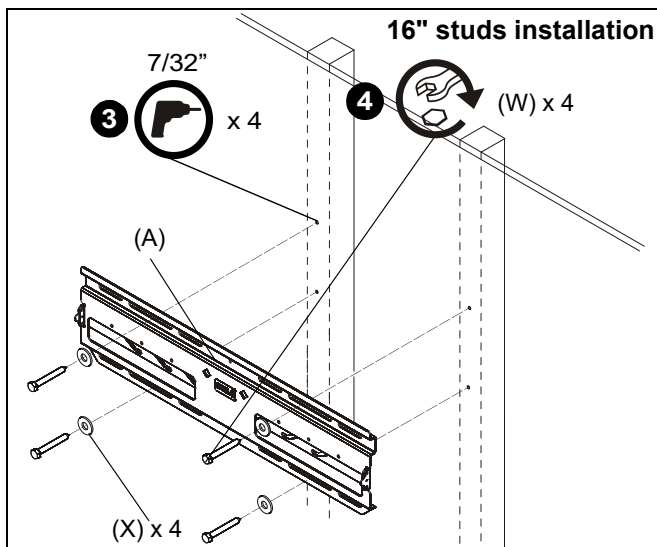


Figure 1

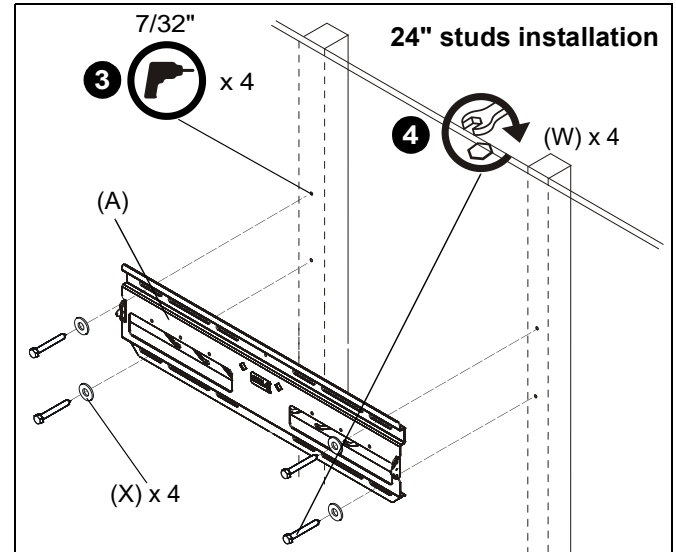


Figure 2

5. Slide the latches out on the wall mount in preparation for installing display. (See Figure 3)

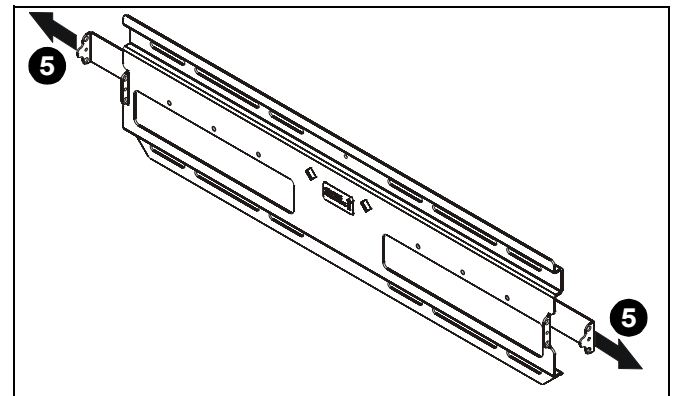


Figure 3

Concrete Installation



WARNING: It is the responsibility of the installer to verify that the structure to which the mount is anchored will safely support five times the combined load of all attached components and equipment.

IMPORTANT ! : Concrete site must be a solid wall 8" in thickness. Do not install the mount to a hollow block concrete wall.

1. Determine a suitable mounting location and lift the wall plate (A) into mounting position on wall.
2. Using a small nail or screw (not provided) in the center hole, lightly support the wall plate at the mounting location. (See Figure 4)
3. Level the wall plate (A) and drill 1/4" pilot holes for anchoring the wall plate. Holes must be drilled between 16" and 24" apart. (See Figure 4)
4. Using four Buildex® Tapcon® anchors and four 5/16" washers (X), install the wall plate (A) on the wall. (See Figure 4)

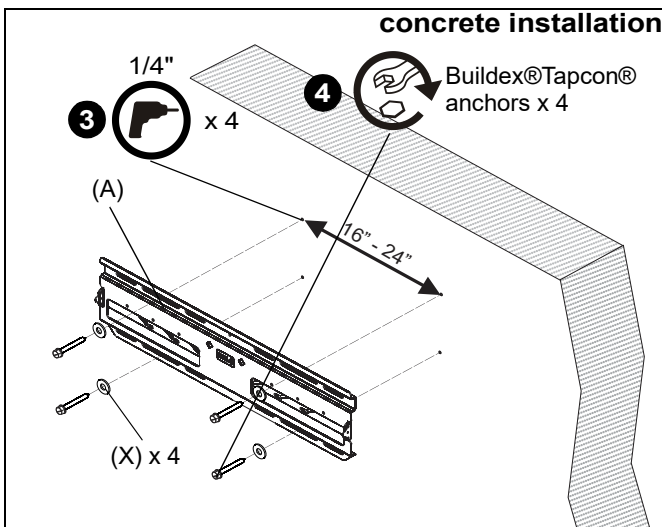


Figure 4

5. Slide the latches out on the wall mount in preparation for installing display. (See Figure 5)

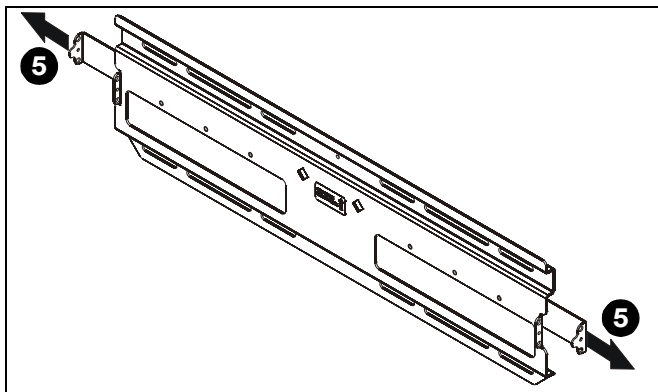


Figure 5

Interface Bracket Installation

1. Place display face down on a soft, non-abrasive surface.
2. Place left and right interface brackets (B and C) on the back of the display, with the tension knob on each bracket facing toward the outside of the television. (See Figure 6)



WARNING: IMPROPER INSTALLATION CAN LEAD TO DISPLAY FALLING CAUSING SERIOUS PERSONAL INJURY OR DAMAGE TO EQUIPMENT! Using screws of improper size may damage your display. Properly sized screws will easily and completely thread into display mounting holes. If spacers are required, be sure to use longer screws of the same diameter.

NOTE: Spacers (R and T) are used to offset the bracket if the mounting holes are recessed or to get around the protrusions.

3. Secure the left and right interface bracket assemblies (B and C) to the display. Select the mounting hardware that fits your application. (See Figure 6)
 - Use spacers (R or T), if necessary.
 - Use M6 screws (H or J) or M8 screws (F or G) and 1/4" washers (V).
 - Or, use M4 screws (N, P or Q) or M5 screws (K, L or M), 1/4" washers (V) and #10 washers (U).

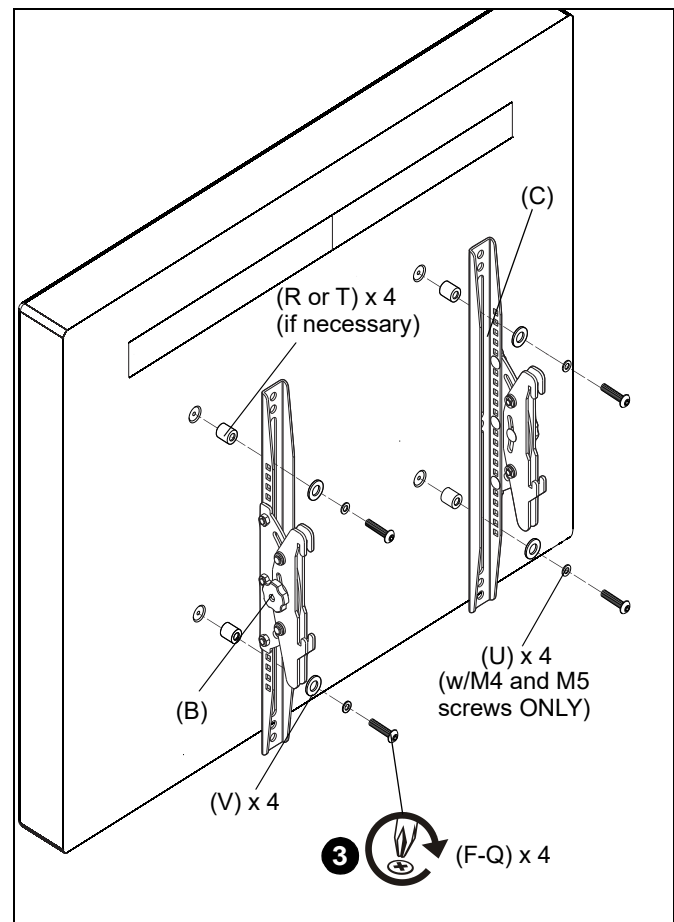


Figure 6

Display Installation



WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components located between the ODMLT up to (and including) the display does not exceed 175 lbs (80 kg).

1. Place the display on the wall plate (A) by hooking the hooks of the brackets (B and C) in the top of the wall plate. (See Figure 7)
2. Secure the display by sliding the latches, one on each side, inward. As the latches are slid in, it will lower and catch the bottom hook and secure the television in place. (See Figure 7)
3. If desired, install self tapping screws (not provided) and/or padlocks (not provided) for additional security. (See Figure 7)

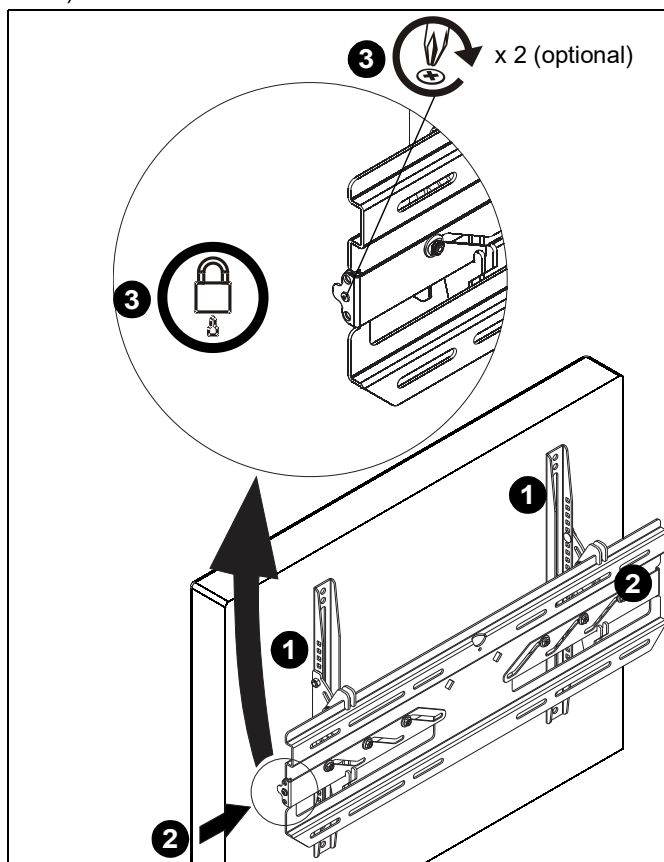


Figure 7

Tilt Adjustment

1. Adjust tilt tension adjustment knobs to desired tension. (See Figure 8)
2. Adjust tilt of display by pulling the top of display away from the wall until desired tilt position is reached. (See Figure 8)
3. Tighten tilt tension adjustment knobs to secure tilt position. (See Figure 8)

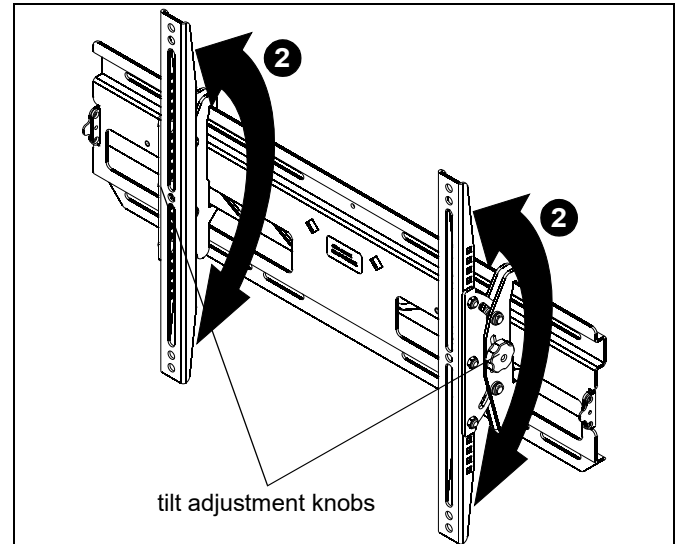


Figure 8

Display Removal

To remove display:



CAUTION: Disconnect power and audio/video cables before removing the display from its wall mount.



WARNING: The display is heavy and extremely fragile. Exercise caution when removing the display from the mount to avoid equipment damage or personal injury.

1. If applicable, remove the self tapping screws (not provided) and/or padlocks from both sides of the wall plate. This hardware provides security. (See Figure 9)
2. Slide the security latches out on both sides of the display from the wall plate. (See Figure 9)
3. With an assistant, lift the display up and off the wall plate to remove the display from the wall. (See Figure 9)

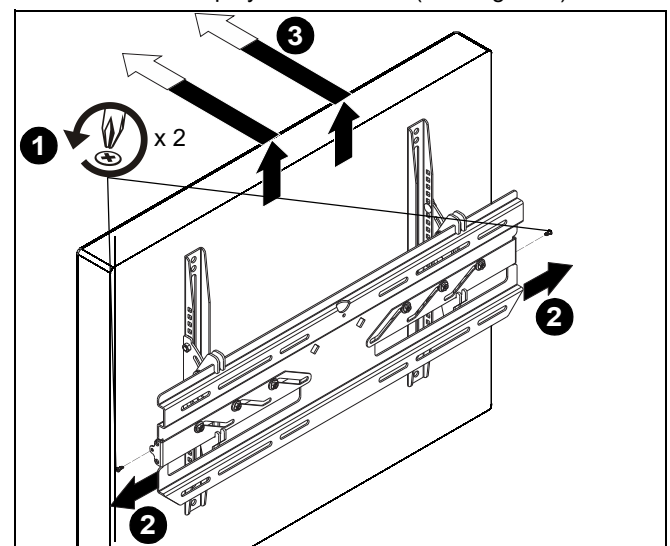


Figure 9

CHIEF®

A brand of  **legrand®**

8800-002842 Rev03
©2026 Legrand | AV
www.legrandav.com
06/2026

- USA/International

Europe

Asia Pacific
- A

P

F

A

P

F

A

P

F
- 10900 Red Circle Drive, Minnetonka, MN 55343

800.582.6480 / 952.225.6000

877.894.6918 / 952.894.6918

Franklinstraat 14, 6003 DK Weert, Netherlands

+31 (0) 495 580 852

+31 (0) 495 580 845

Office No. 918 on 9/F, Shatin Galleria

18-24 Shan Mei Street

Fotan, Shatin, Hong Kong

852 2145 4099

852 2145 4477

