


RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

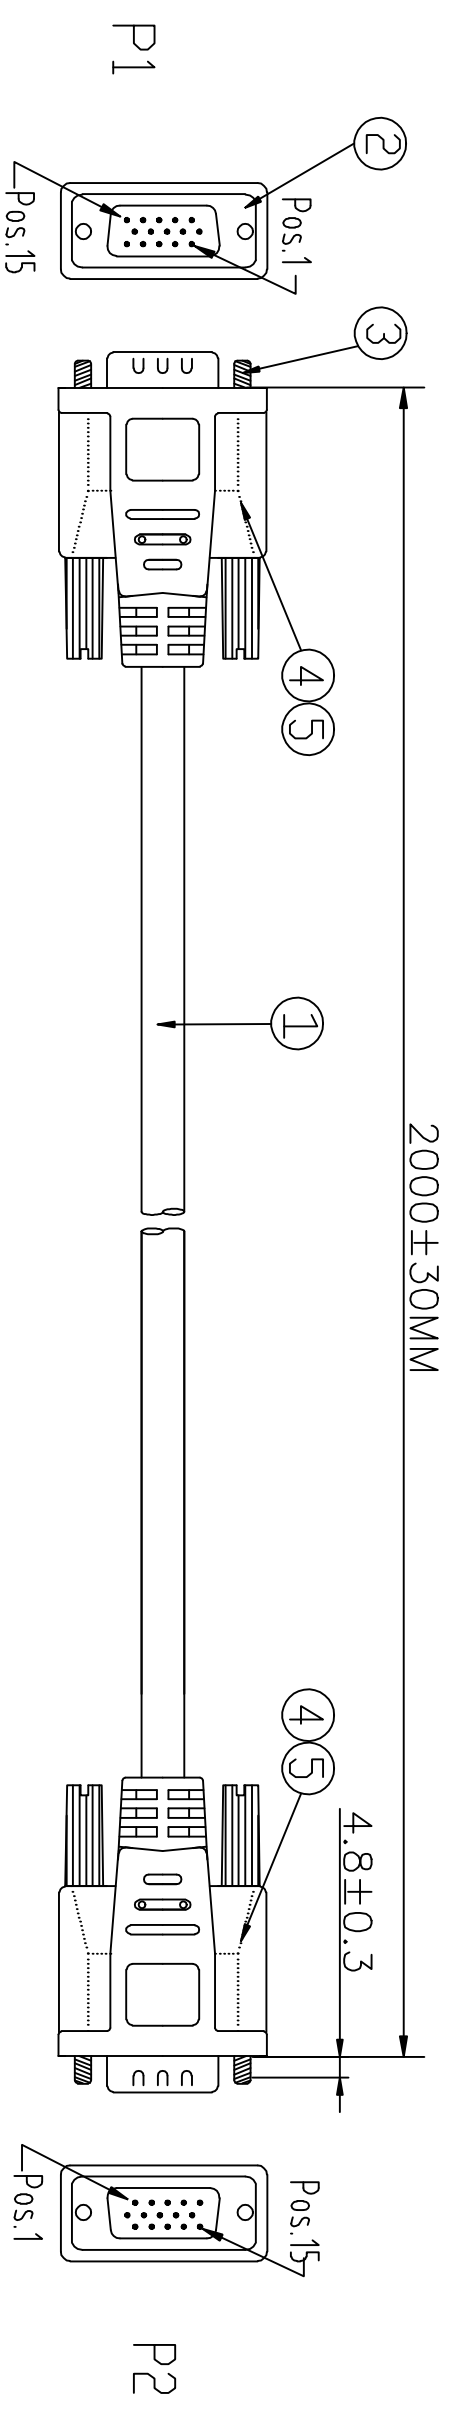

REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

PIN OUT

P1	P2	P1	P2
1 Red coax conductor	1	13	13
2 Green coax conductor	2	14	14
3 Blue coax conductor	3	15	15
6 Red coax drain	6	4	4
7 Green coax drain	7	5	5
8 Blue coax drain	8	10	10
9	9	11	11
12	12	shell	Drain
			shell

⑥	OUTER MOLDED	BLACK 45P PVC	0.038	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4-40UNC 2.3*45.5MM,BLACK PVC	4	PCS
③	CONNECTOR	HDB 15PIN/MALE BLUE INSULATOR,NICKEL PLATED SHELL, GOLD PLATED PIN	2	PCS
①	CABLE	(1G*28#+D+AL+PVC)*3C+6C*28#+AL+D+B JACKET:BLACK PVC OD:8.0±0.15 MARKING:AWM STYLE 2919 80°C 30V LOW VOLTAGE COMPUTER CABLE ROHS COMPLIANT	2	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date MARCH 6,2012	File name HDB15PIN M/M L=2M Date MARCH 6,2012 Scale FREE

32 1020		32 1020	
Edition 1		Sheet 1/1	