


RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

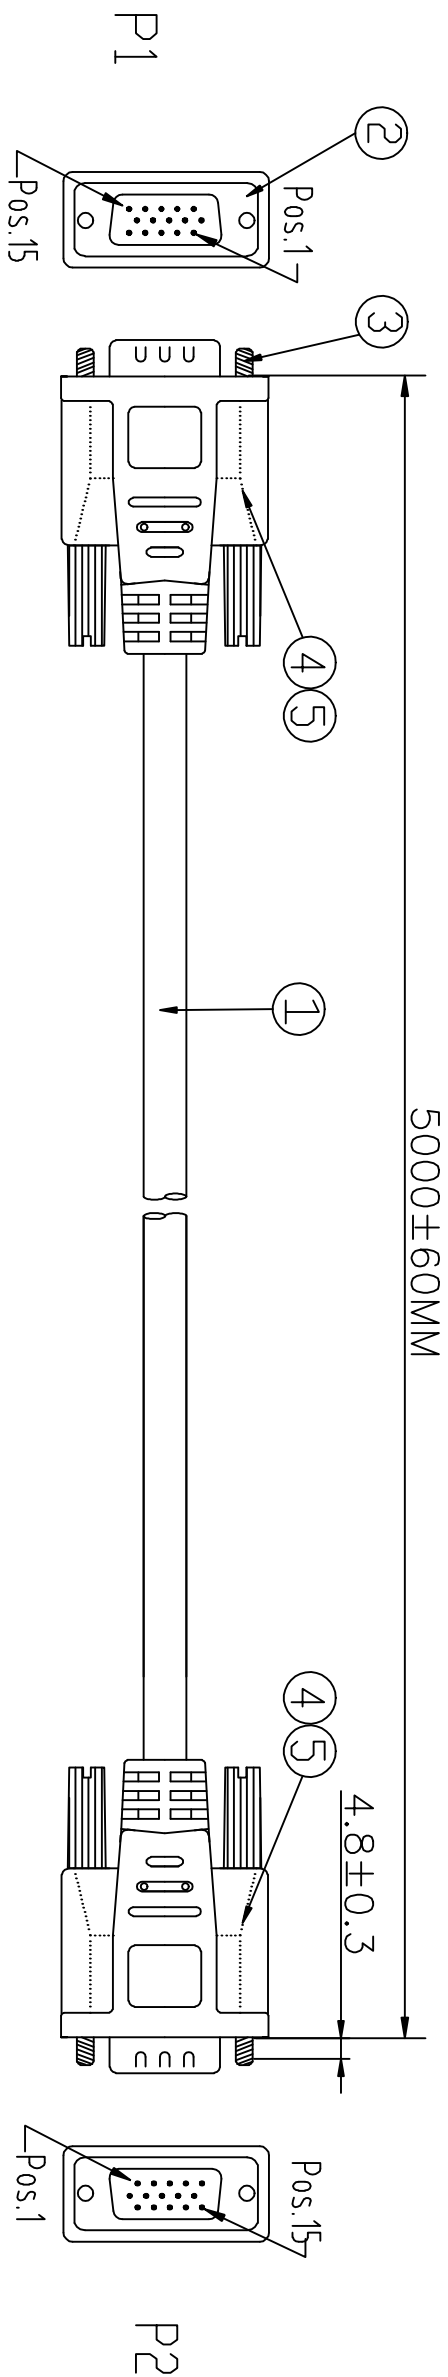


REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
- Conduction resistance 5Ω(Max)

⑥	OUTER MOLDED	BLACK 45P PVC	0.038	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4--40UNC 2.3*45.5MM,BLACK PVC	4	PCS
③	CONNECTOR	HDB 15PIN/MALE BLUE INSULATOR,NICKEL PLATED SHELL, GOLD PLATED PIN	2	PCS
①	CABLE	(1C*28#+D+AL+PVC)*3C+6C*28#+AL+D+B JACKET:BLACK PVC OD:8.0±0.15 MARKING:AWM STYLE 2919 80°C 30V LOW VOLTAGE COMPUTER CABLE ROHS COMPLIANT	5	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

PIN OUT

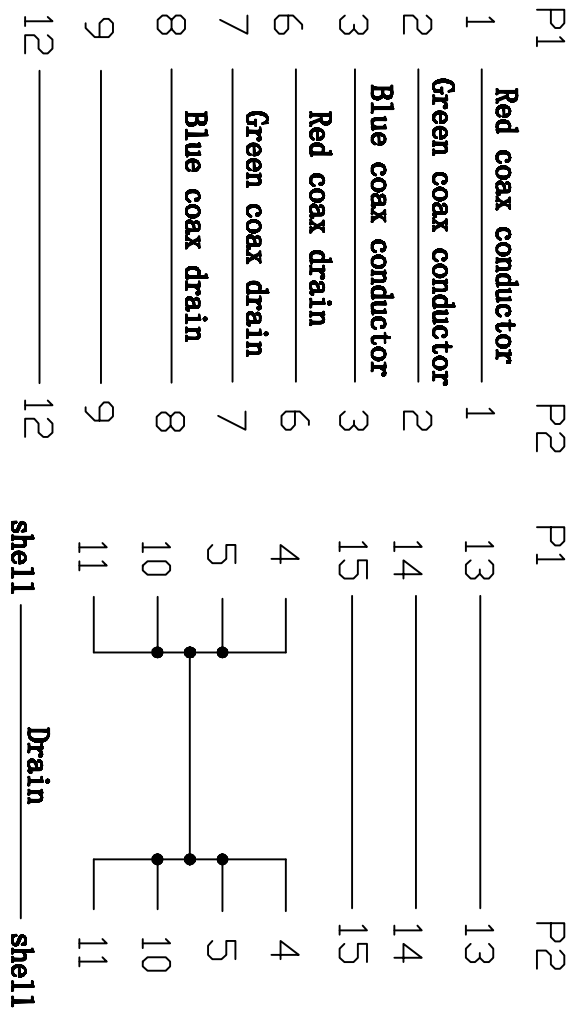

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by	HELEN	Checked by	HELEN
ACHY		Approved by - date	MARCH 6,2012
		File name	HDB15PIN M/M-L-5M
		Date	MARCH 6,2012
		Scale	FREE
		32 1050	
		32 1050	
		1	Sheet
		1/1	