


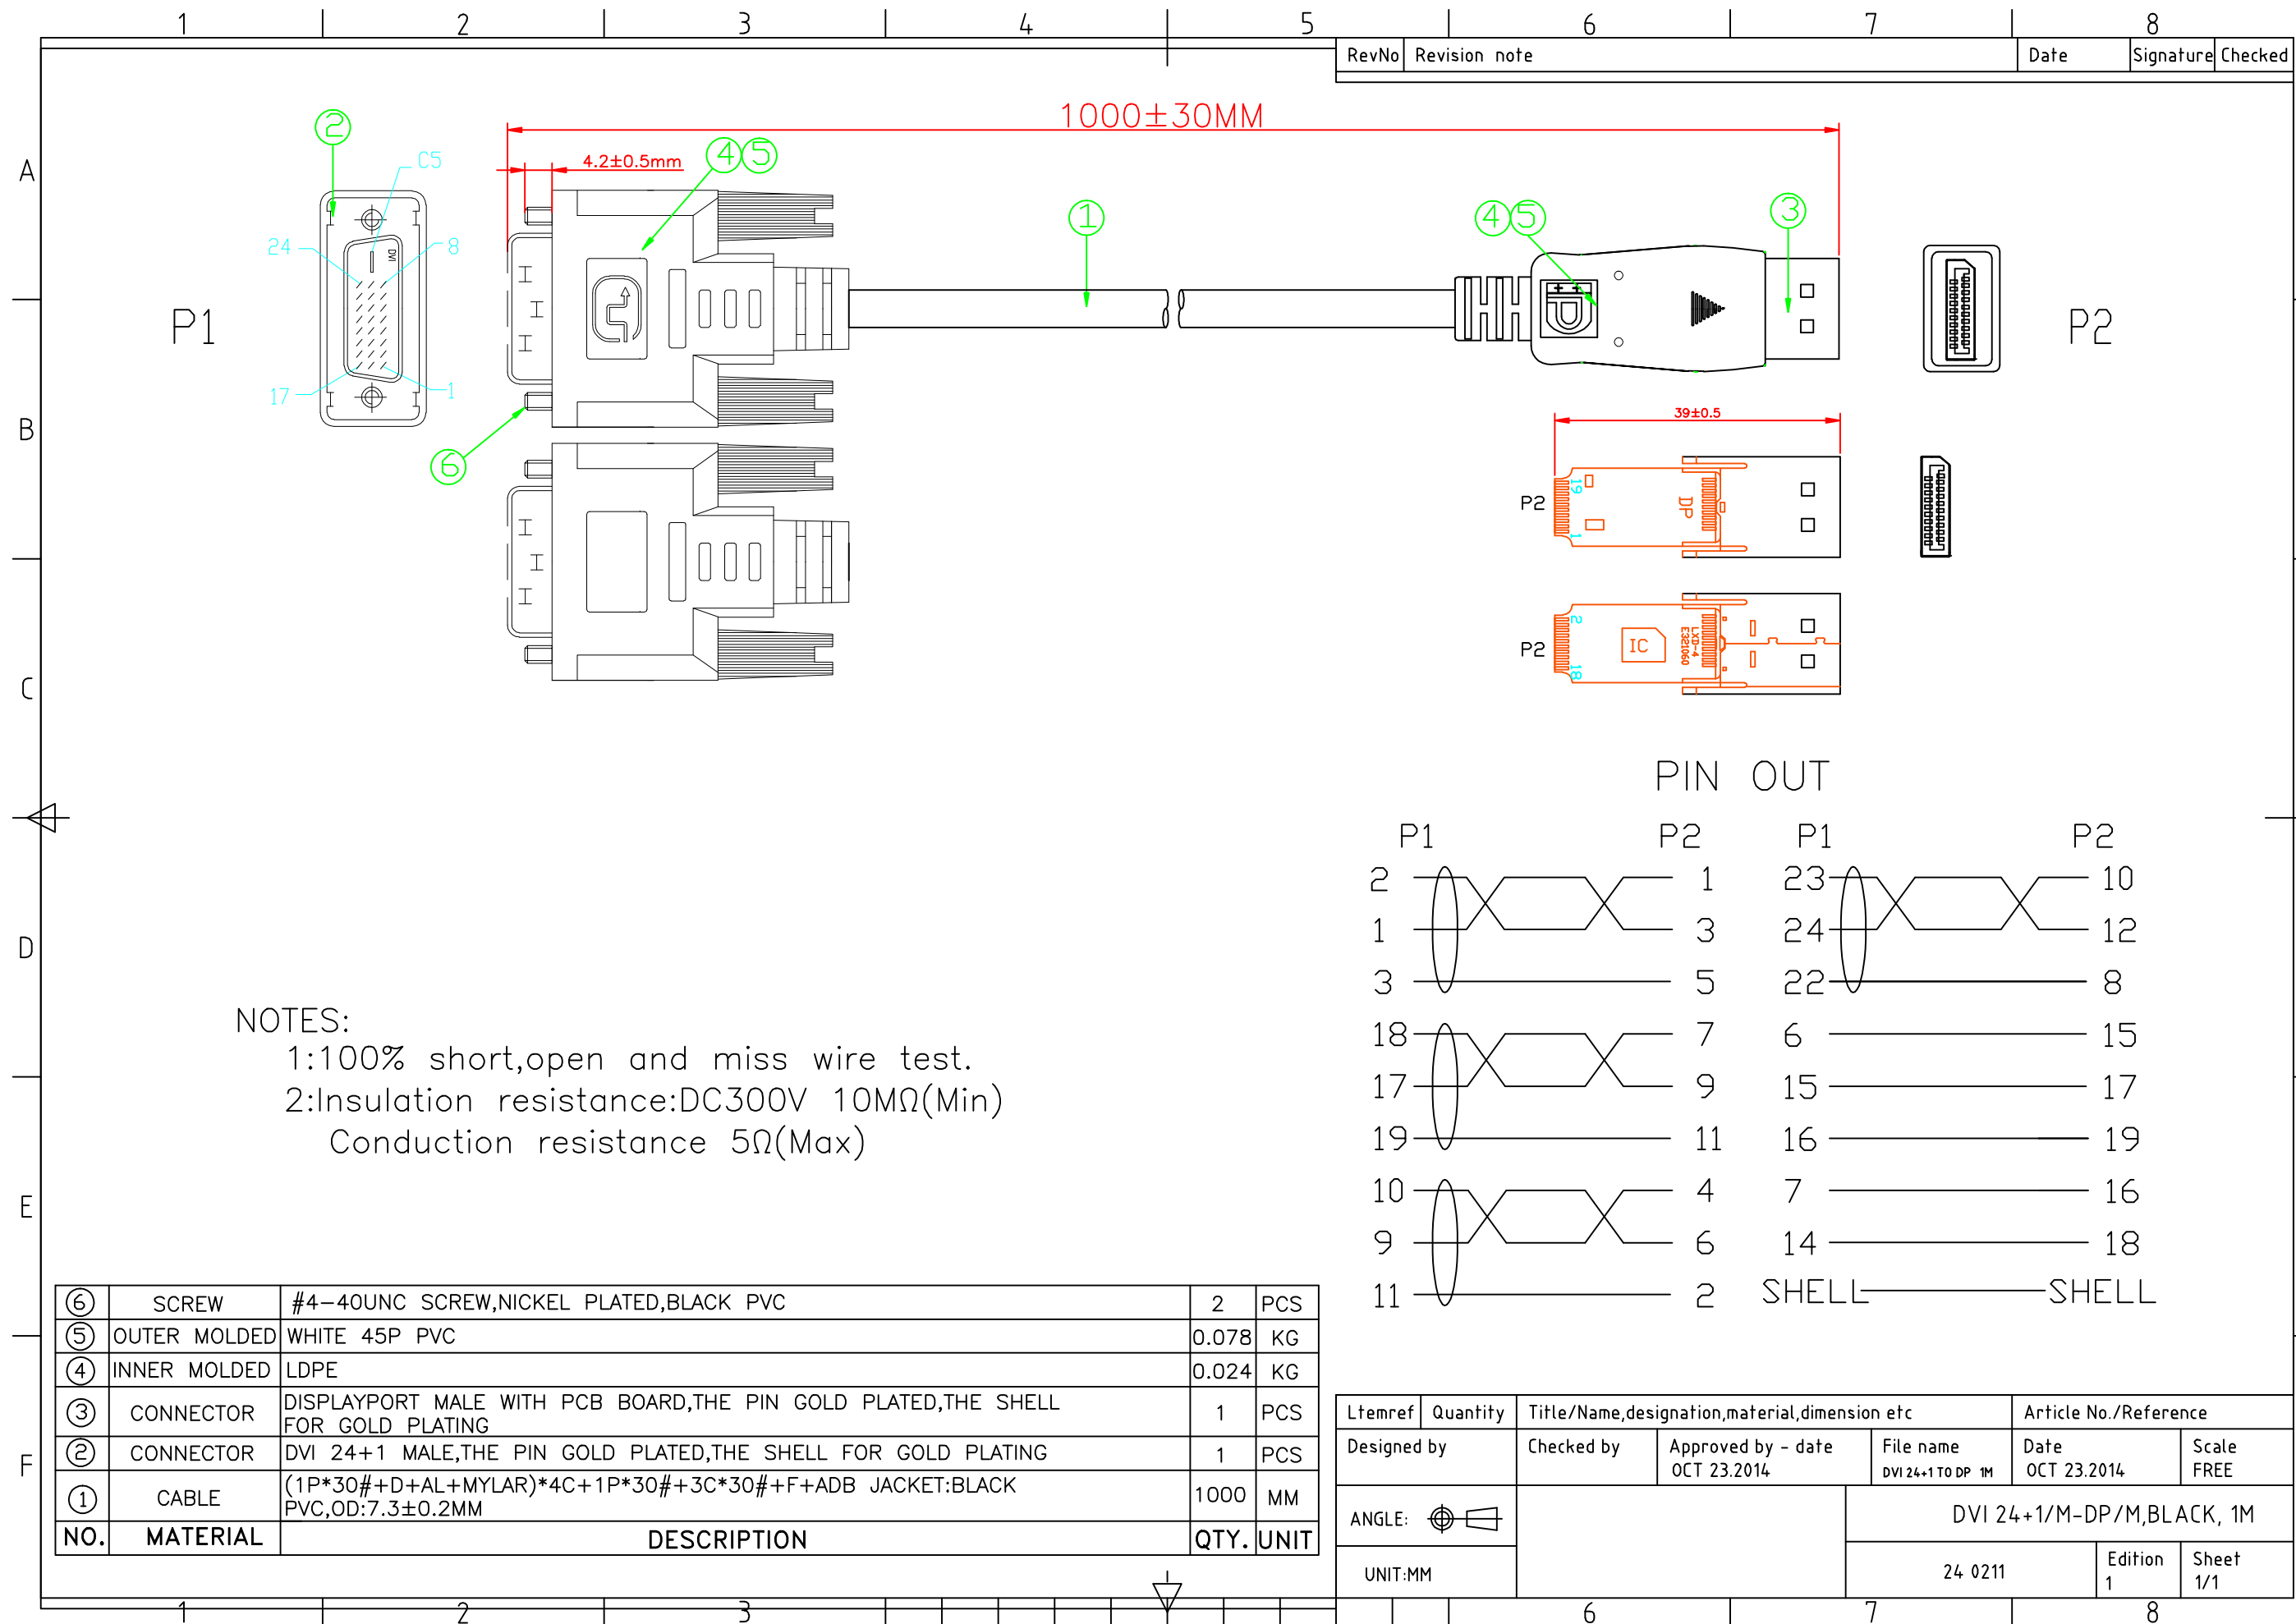

NOTES:
1:100% short,open and miss wire test.
2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

⑥	SCREW	#4-40UNC SCREW,NICKEL PLATED,BLACK PVC	2	PCS
⑤	OUTER MOLDED	WHITE 45P PVC	0.078	KG
④	INNER MOLDED	LDPE	0.024	KG
③	CONNECTOR	DISPLAYPORT MALE WITH PCB BOARD,THE PIN GOLD PLATED,THE SHELL FOR GOLD PLATING	1	PCS
②	CONNECTOR	DVI 24+1 MALE,THE PIN GOLD PLATED,THE SHELL FOR GOLD PLATING	1	PCS
①	CABLE	(1P*30#+D+AL+MYLAR)*4C+1P*30#+3C*30#+F+ADB JACKET:BLACK PVC,OD:7.3±0.2MM	1000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
		OCT 23.2014	DVI 24+1 TO DP 1M	OCT 23.2014	FREE	
ANGLE:				DVI 24+1/M-DP/M,BLACK, 1M		
UNIT:MM				24 0211	Edition 1	Sheet 1/1