RevNo	Revision note	Date	Signature	Checked

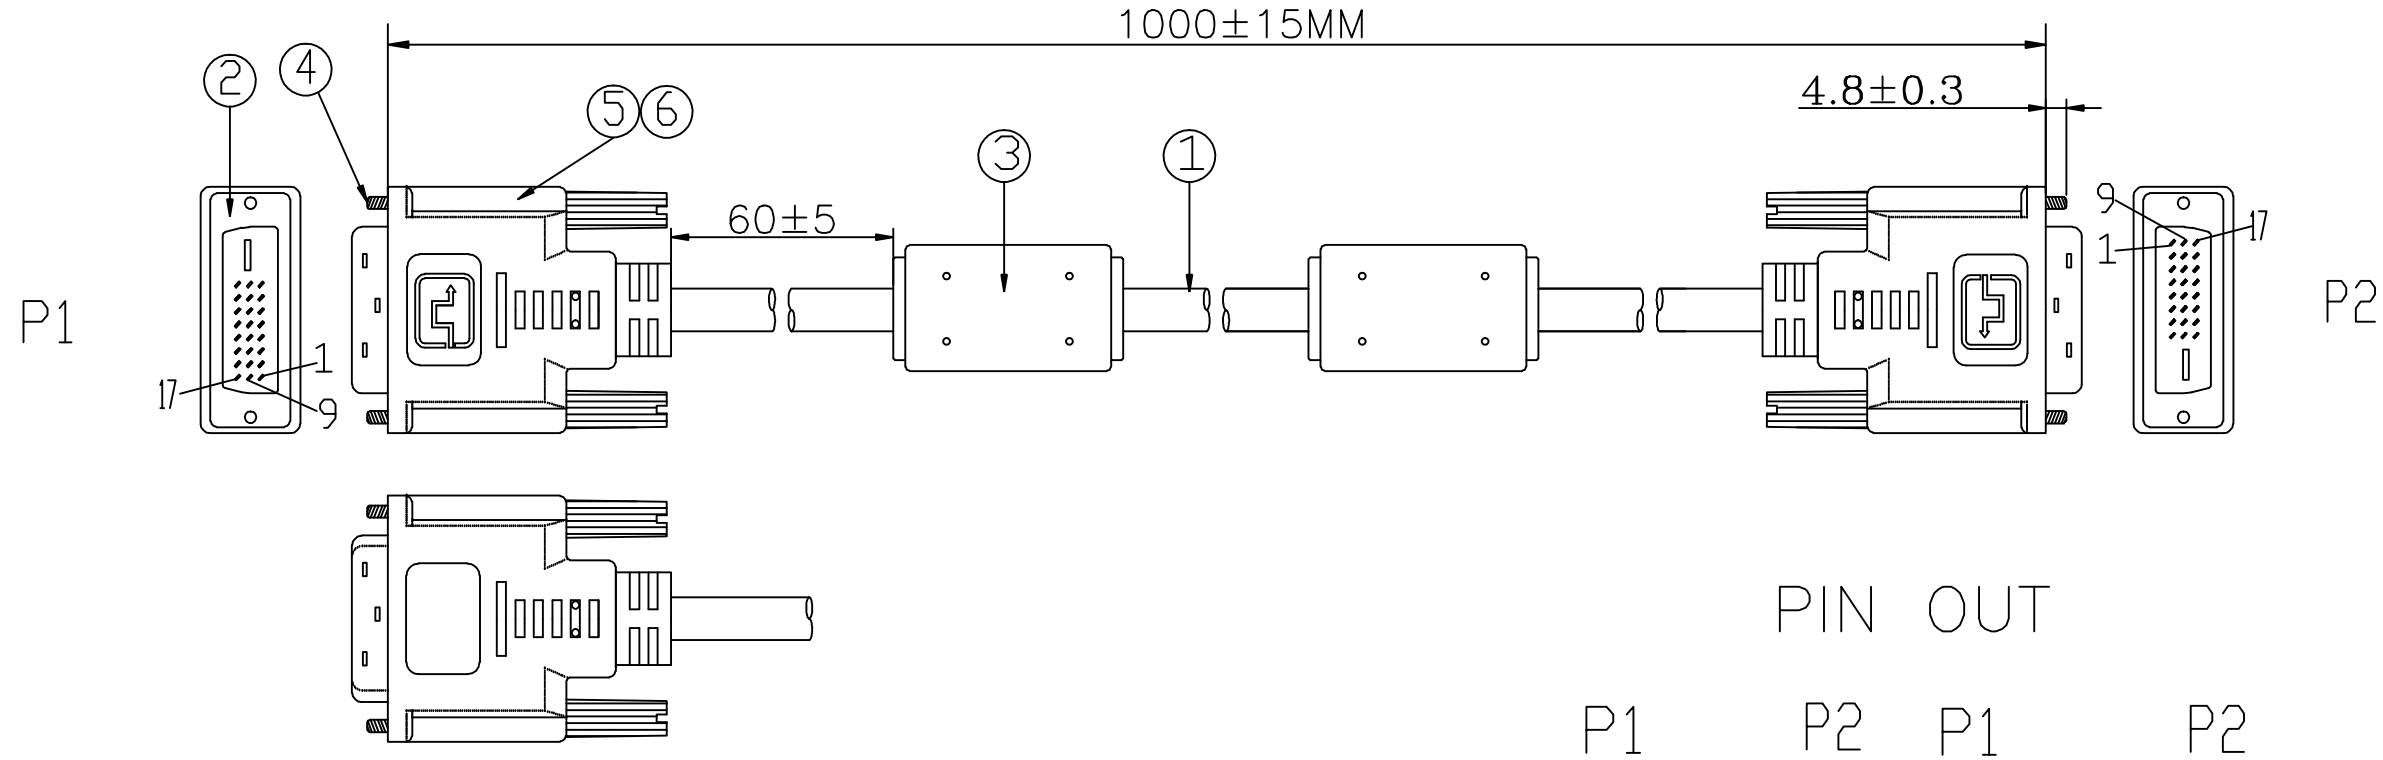

REQUIREMENTS:

1:100% short,open and miss wire test.

2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

PIN OUT

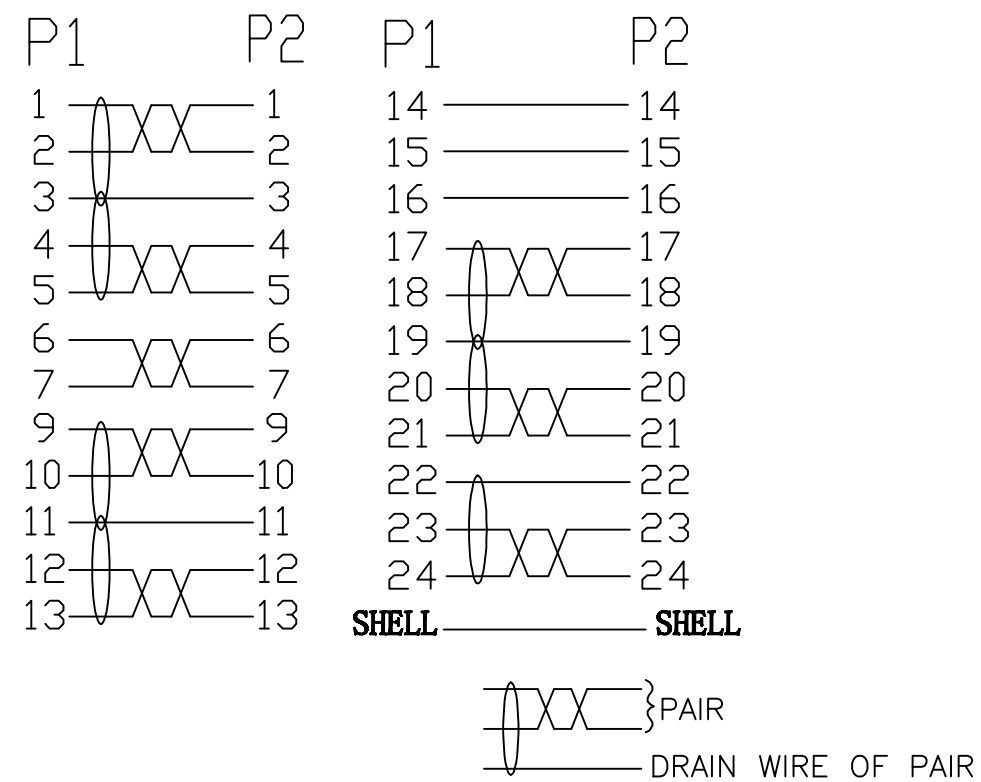

NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT
⑥	OUTER MOLDED	BLACK 45P PVC	0.038	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4-40UNC 2.3*45.5MM,BLACK PVC	4	PCS
③	FERRITE CORE	F5B:RH12*20*8.0	2	PCS
②	CONNECTOR	DVI 24+1/M BLACK INSULATOR,NICKEL PLATED SHELL, GOLD PLATED PIN	2	PCS
①	CABLE	(1P*30#+FME+D+AL+MYLAR)*7C+1P*30#+3C*30#+ADB JACKET: BLACK PVC OD:7.3±0.15	1	M

Ltemref	Quantity	Title/Name,designation,material,dimension etc		Article No./Reference	
Designed by ACHY	Checked by HELEN	Approved by - date MARCH 6.2012	File name DVI 24+1 M/M L=1M	Date MARCH 6.2012	Scale FREE
		32 2799			
		1MDVI DUAL		Edition 1	Sheet 1/1