
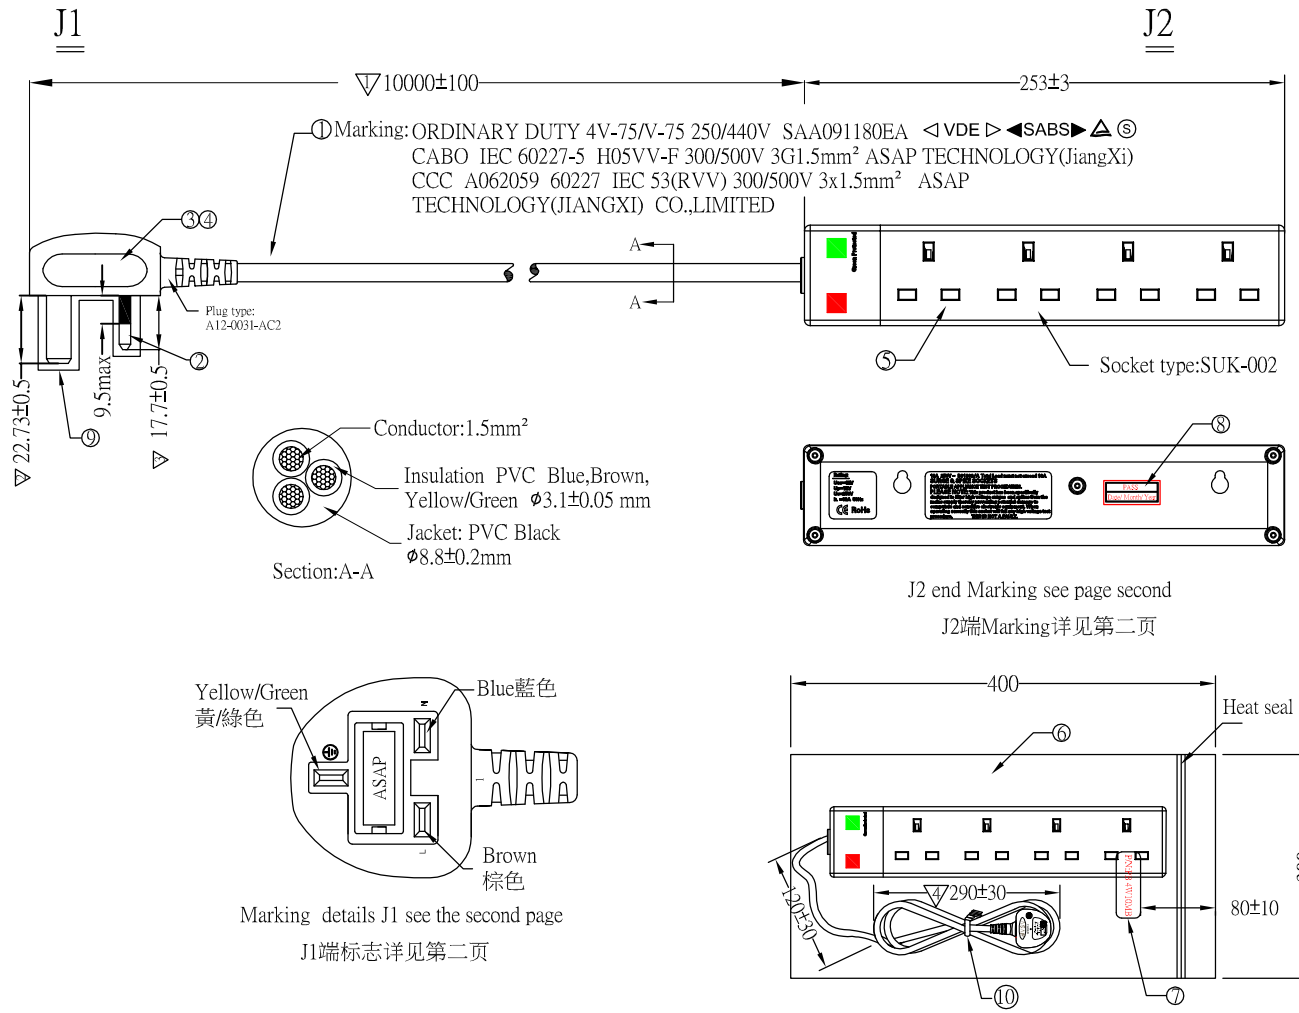


8		7		6		5		4		3		2		1																																																								
Technical requirement 技术参数：										REV.	DESCRIPTION		DESIGN	APPROVAL	DATE																																																							
										A	NEW		Hongmei	BG Yang	2015.06.26																																																							
1. Electrical Characteristics Test电气性能检验																																																																						
1.1 Products 100% for electrical test.成品100%电性测试.																																																																						
1.2 Insulation resistance: More than 100MΩ of 500V DC,Conductor resistance：Less than3.0Ω.																																																																						
绝缘阻抗:大于或等于100MΩ 500V DC,导通阻抗小于等于3.0Ω.																																																																						
2. Finished product conditions 成品状态																																																																						
2.1 The attachment plug front show the test mark of "T".																																																																						
插头主视面須有测试标志"T"。																																																																						
2.2 The dimension with "▽" must be control and inspected importantly.																																																																						
带"▽"尺寸需重点管控和检验。																																																																						
2.3 material and product comply with Doc No."QW-Q-043"《material-and product- of restricted substance control specification.																																																																						
物料及成品必须符合QW-Q-043《材料与成品限用物质管理规范》.																																																																						
3. The standards for the products:.产品标准：																																																																						
3.1 The cord shall comply with IEC60227.線材須符合IEC60227.																																																																						
3.2 The socket-outlet shall comply with BS1363-2:1995.																																																																						
插板須符合BS1363-2:1995.																																																																						
wiring method接線方式：																																																																						
J1 cord J2																																																																						
E Yellow/Green 黃/綠色 E																																																																						
L Brown 棕色 L																																																																						
N Blue 藍色 N																																																																						
																																																																						
<table><tr><td>⑩</td><td>TIE</td><td>Black PE tie hanking cord and meeting RoHS.</td><td>pcs</td><td>1</td></tr><tr><td>⑨</td><td>SLEEVE</td><td>Protecting of plug,white</td><td>pcs</td><td>1</td></tr><tr><td>⑧</td><td>Q&A Label</td><td>Type L 25 × W15 Black character on white background</td><td>pcs</td><td>1</td></tr><tr><td>⑦</td><td>Label</td><td>Type L 55 × W18 Black character on white background</td><td>pcs</td><td>1</td></tr><tr><td>⑥</td><td>PE BAG</td><td>Type L 350 × W200 PE bag</td><td>pcs</td><td>1</td></tr><tr><td>⑤</td><td>Socket assembly</td><td>UK 4 gang socket assembiy</td><td>pcs</td><td>1</td></tr><tr><td>④</td><td>PVC PELLET</td><td>55P black PVC pellets meeting RoHS, UL94 V-0.</td><td>g</td><td></td></tr><tr><td>③</td><td>FUSE</td><td>13A fuse in line with BS 1363</td><td>pcs</td><td>1</td></tr><tr><td>②</td><td>INSERT</td><td>UK fuse plug insert with grounding,black</td><td>pcs</td><td>1</td></tr><tr><td>①</td><td>POWER CORD</td><td>H05VV-F 3x1.5mm² Φ8.8±0.2mm black</td><td>mm</td><td>/</td></tr><tr><td>ITEM</td><td>NAME</td><td>DESCRIPTION</td><td>UNIT</td><td>Q'TY</td></tr></table>										⑩	TIE	Black PE tie hanking cord and meeting RoHS.	pcs	1	⑨	SLEEVE	Protecting of plug,white	pcs	1	⑧	Q&A Label	Type L 25 × W15 Black character on white background	pcs	1	⑦	Label	Type L 55 × W18 Black character on white background	pcs	1	⑥	PE BAG	Type L 350 × W200 PE bag	pcs	1	⑤	Socket assembly	UK 4 gang socket assembiy	pcs	1	④	PVC PELLET	55P black PVC pellets meeting RoHS, UL94 V-0.	g		③	FUSE	13A fuse in line with BS 1363	pcs	1	②	INSERT	UK fuse plug insert with grounding,black	pcs	1	①	POWER CORD	H05VV-F 3x1.5mm² Φ8.8±0.2mm black	mm	/	ITEM	NAME	DESCRIPTION	UNIT	Q'TY						
⑩	TIE	Black PE tie hanking cord and meeting RoHS.	pcs	1																																																																		
⑨	SLEEVE	Protecting of plug,white	pcs	1																																																																		
⑧	Q&A Label	Type L 25 × W15 Black character on white background	pcs	1																																																																		
⑦	Label	Type L 55 × W18 Black character on white background	pcs	1																																																																		
⑥	PE BAG	Type L 350 × W200 PE bag	pcs	1																																																																		
⑤	Socket assembly	UK 4 gang socket assembiy	pcs	1																																																																		
④	PVC PELLET	55P black PVC pellets meeting RoHS, UL94 V-0.	g																																																																			
③	FUSE	13A fuse in line with BS 1363	pcs	1																																																																		
②	INSERT	UK fuse plug insert with grounding,black	pcs	1																																																																		
①	POWER CORD	H05VV-F 3x1.5mm² Φ8.8±0.2mm black	mm	/																																																																		
ITEM	NAME	DESCRIPTION	UNIT	Q'TY																																																																		
8		7		6		5		4		3		2		1																																																								



Rating:
Uoc=4KV
Up=1KV
Uc=250V
IL =13A 50Hz
RoHs


13A 250V ~ BS1363/A Total Load must not exceed 13A
SURGE & SPIKE SOCKETS
PORTABLE APPLIANCE TEST PROCEDURES.
PLEASE NOTE: This product has been specifically
designed to filter high voltage surges and spikes from the
mains supply thereby preventing potential damage to
computers and sensitive electronic equipment. When
operating correctly this socket will fail any high voltage test
procedure. THIS IS NOT A FAULT.

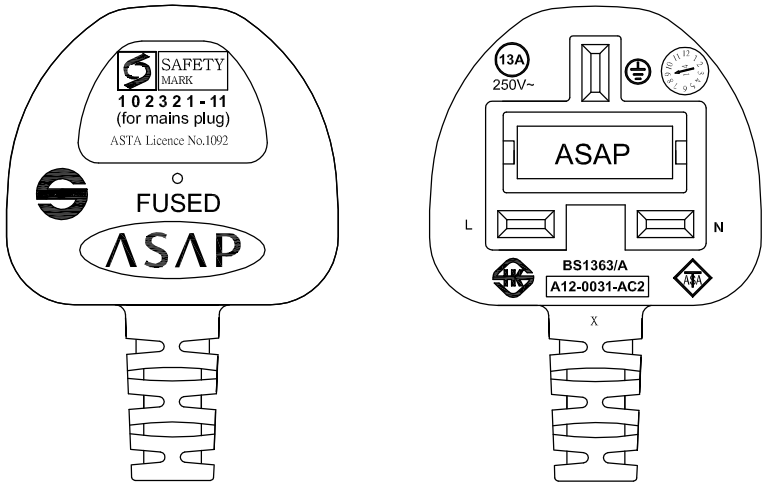

J1 Marking
J1端標誌

J2Marking
J2端標誌

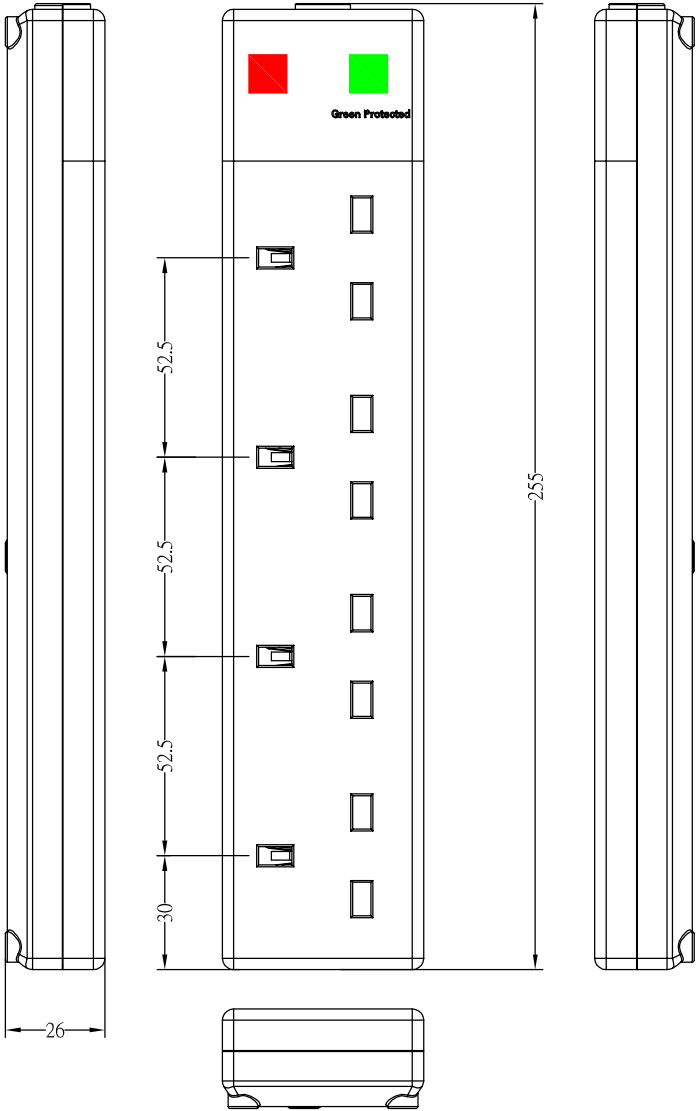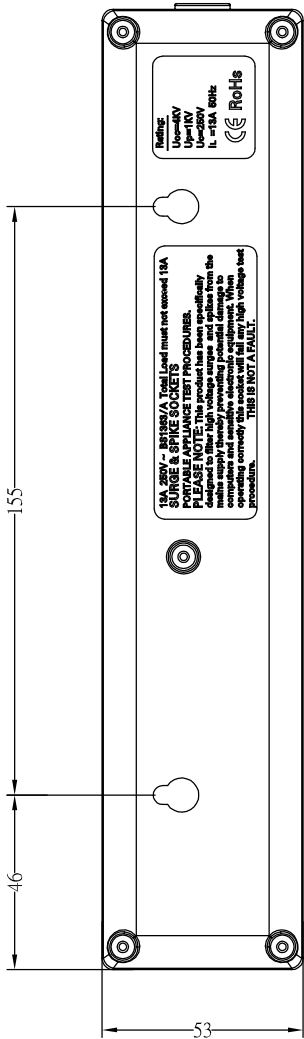

X.±	X.°±	UNITS mm	P/N: PB 4W10MB					
.X±	.X°±		MATL	PART NO: L8CAC053-QT-N	TITLE: UK POWER PLUG TO 4 GANG UK SOCKET-OUTLET L=10.0M Black			
.XX±	.XX°±	FINISH			APPD: Baogen Yang	DWG NO: ACRDN15060043-008		
.XXX±	.XXX°±		CHKD: Guangren Ouyang					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ASAP TECHNO- LOGY(JIANGXI)CO., LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ASAP TECHNO- LOGY(JIANGXI)CO., LIMITED.				Q'TY	DR: Hongmei Hu		SCALE	SHEET
			NONE				2/2	A