



RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

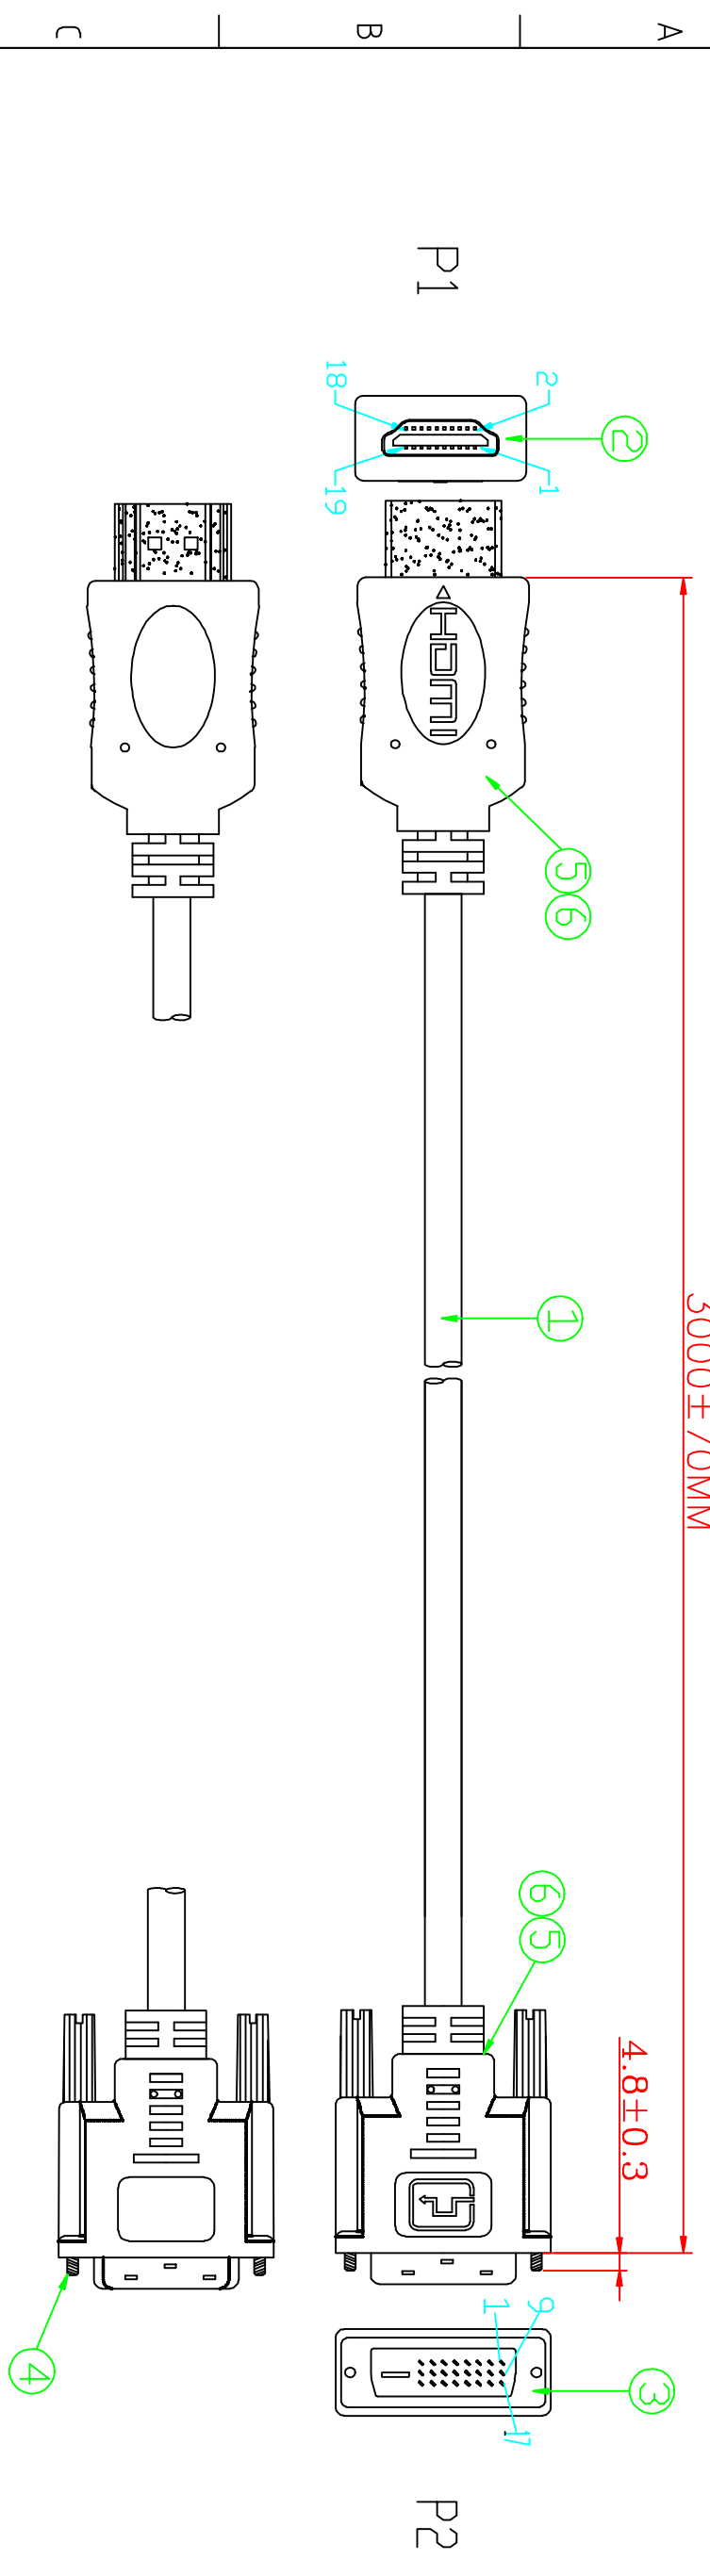

PIN OUT

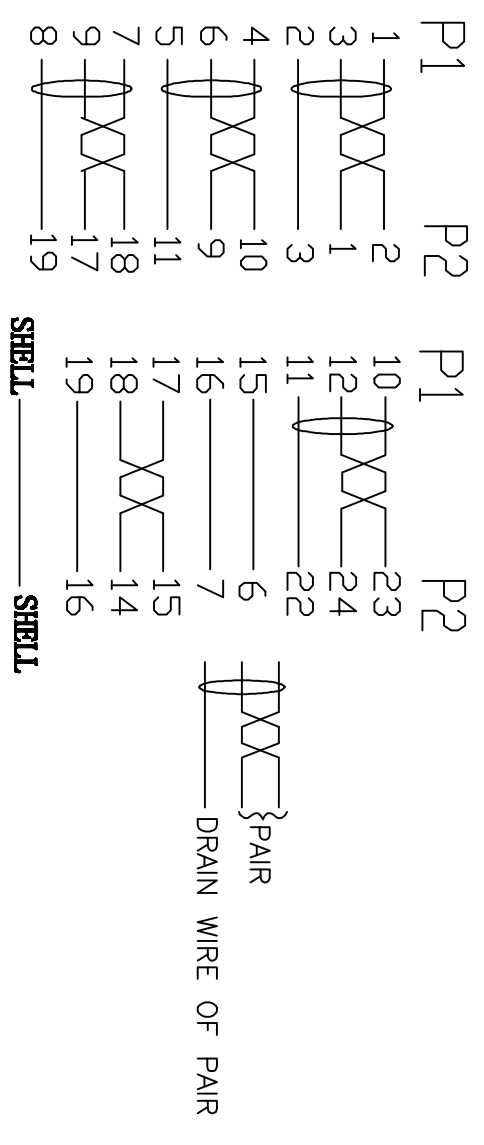

REQUIREMENTS:
 1:100% short,open and miss wire test.
 2:Insulation resistance:DC300V 10MΩ(Min)
 Conduction resistance 5Ω(Max)

⑥	OUTER MOLDED	BLACK 45P PVC	0.048	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4-40UNC 2.3*45.5MM,BLACK PVC	2	PCS
③	CONNECTOR	DVI 24+1/MALE,BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	HDMI A TYPE/MALE,BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	(1P*30#+FME+D+AL+MYLAR)*4C+1P*30#+3C*30#+ADB JACKET: BLACK PVC OD:6.0±0.15MM	3000	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Litemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by	Checked by	HELEN	HELEN
ACHY	Approved by - date	MARCH 6,2012	MARCH 6,2012
ANGLE:			
UNIT:MM			
		DVI 24+1/M TO HDMI AM	
		32 3752	
		Edition 1	Sheet 1/1