



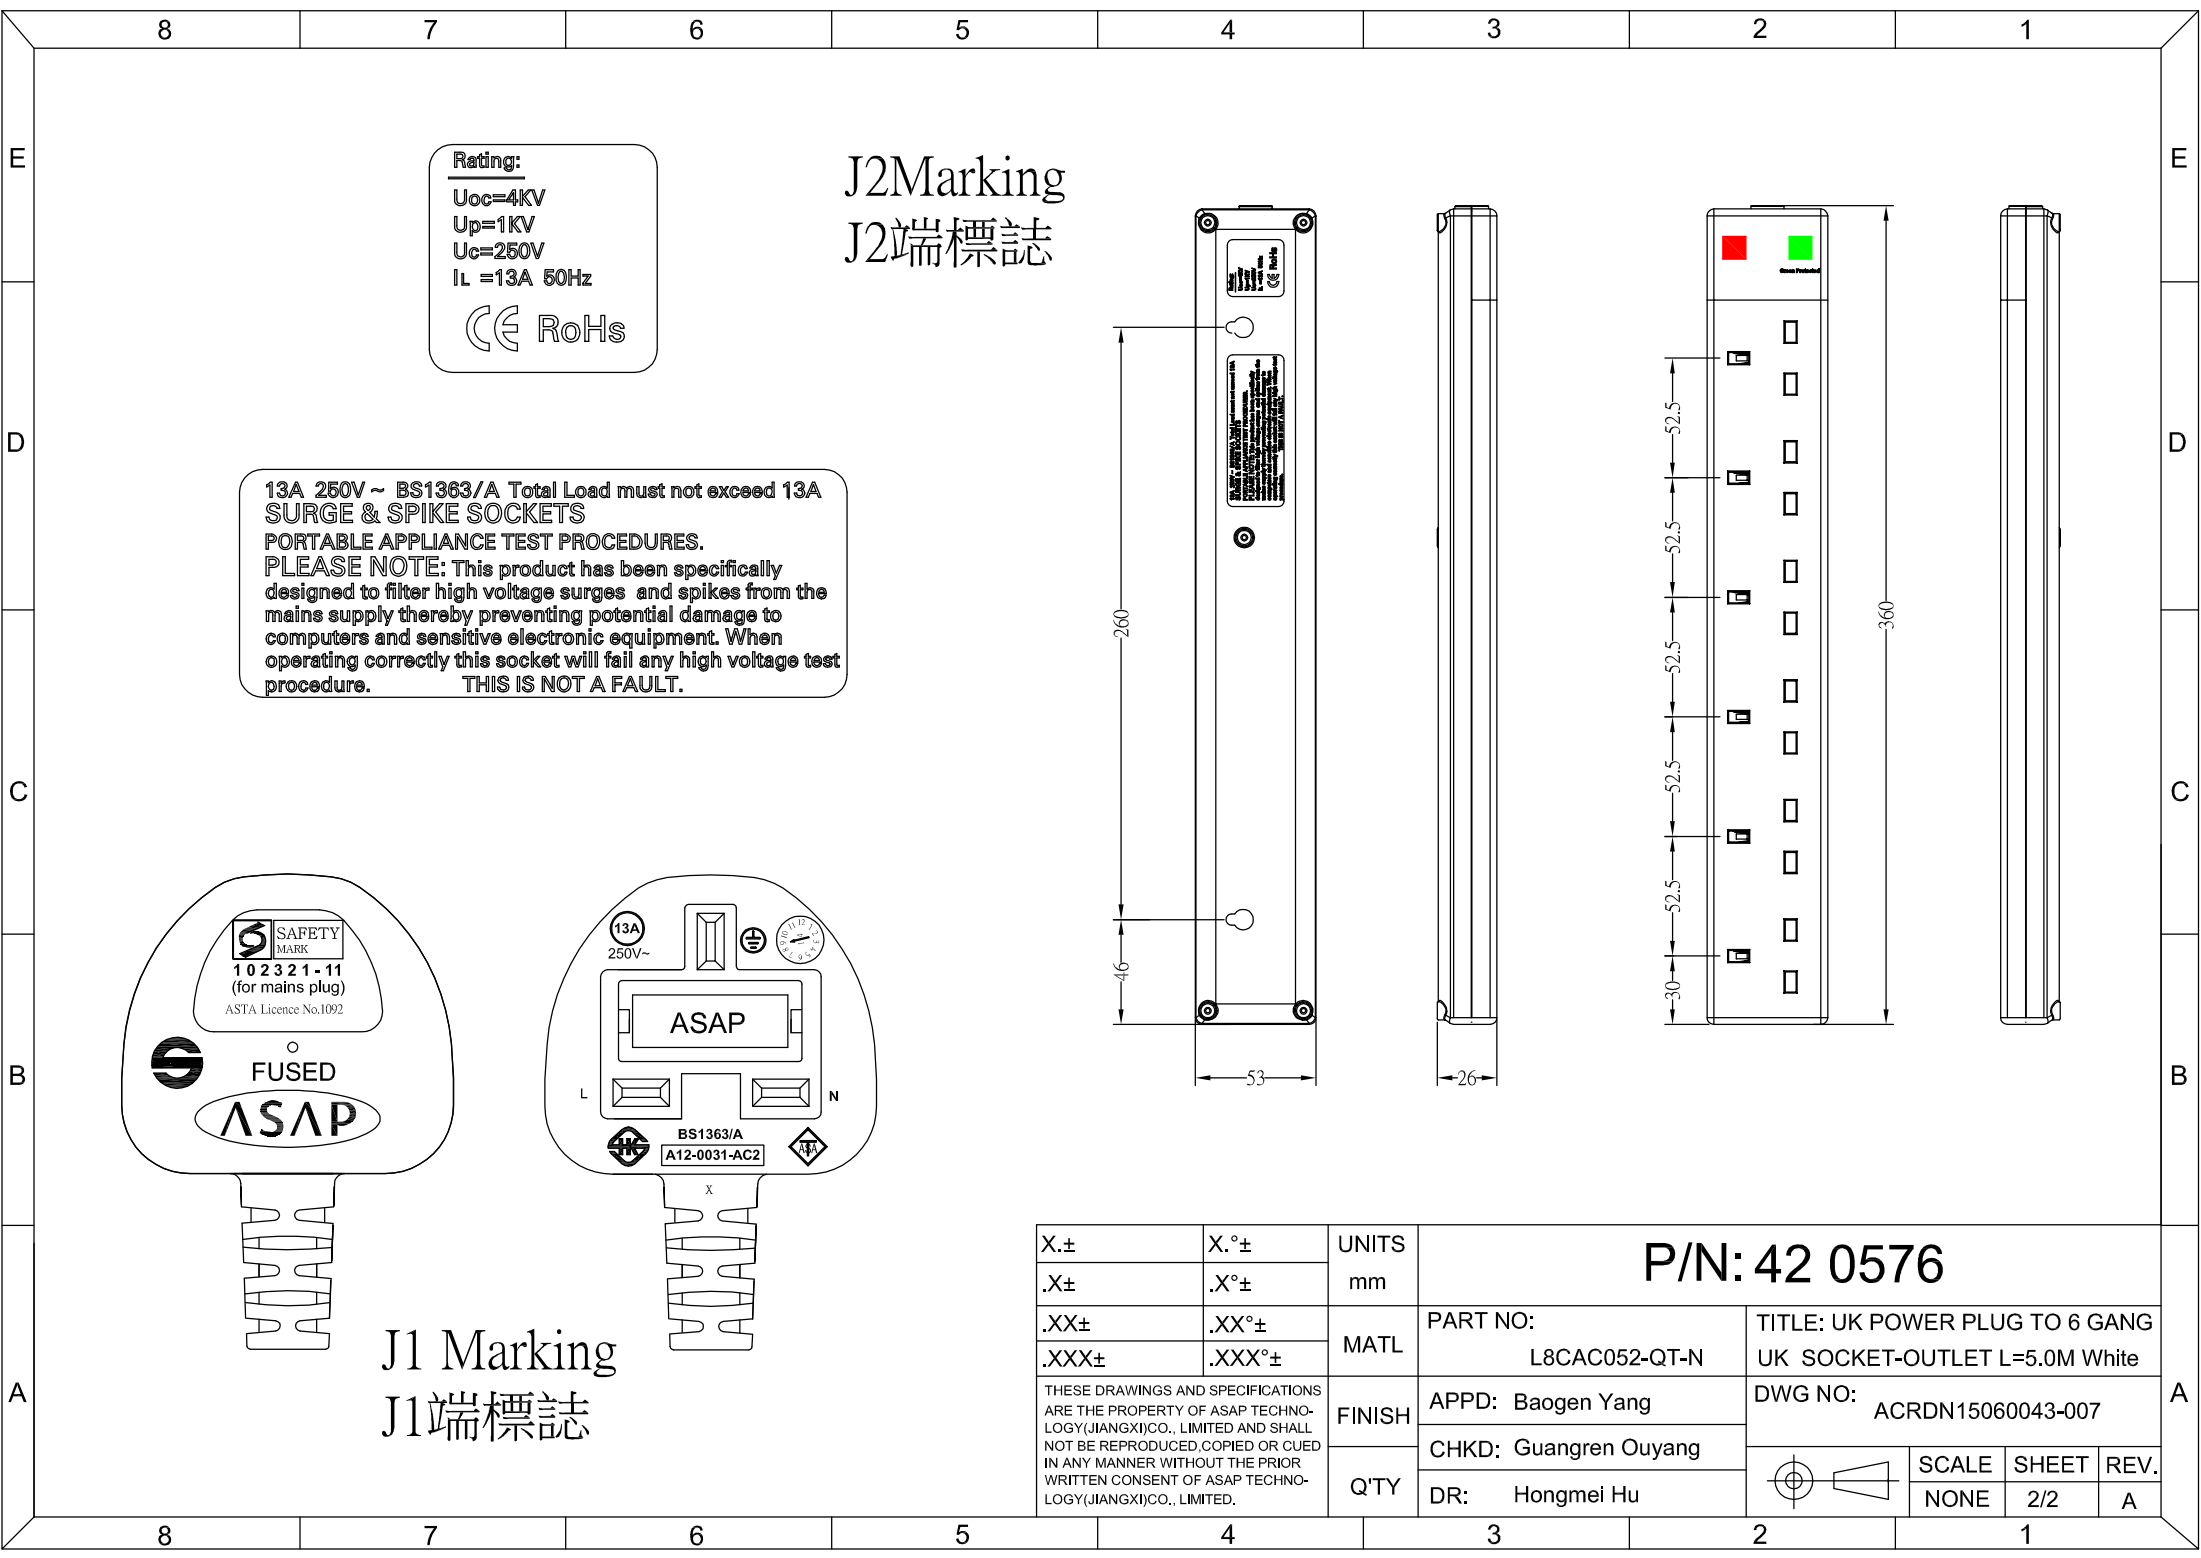






Rating:
Uoc=4KV
Up=1KV
Uc=250V
IL =13A 50Hz
RoHs


J2Marking
J2端標誌

13A 250V ~ BS1363/A Total Load must not exceed 13A
SURGE & SPIKE SOCKETS
PORTABLE APPLIANCE TEST PROCEDURES.
PLEASE NOTE: This product has been specifically
designed to filter high voltage surges and spikes from the
mains supply thereby preventing potential damage to
computers and sensitive electronic equipment. When
operating correctly this socket will fail any high voltage test
procedure. THIS IS NOT A FAULT.

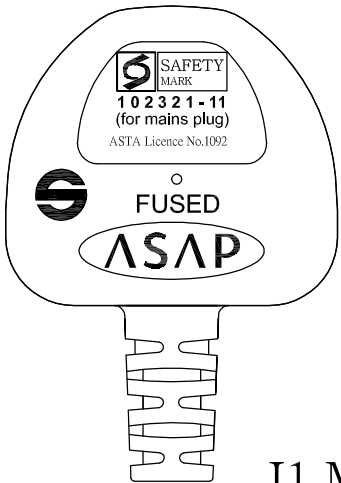

J1 Marking
J1端標誌

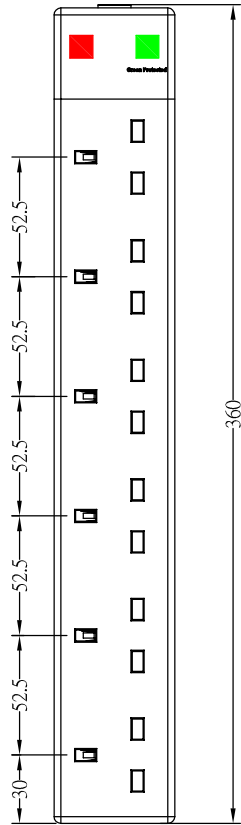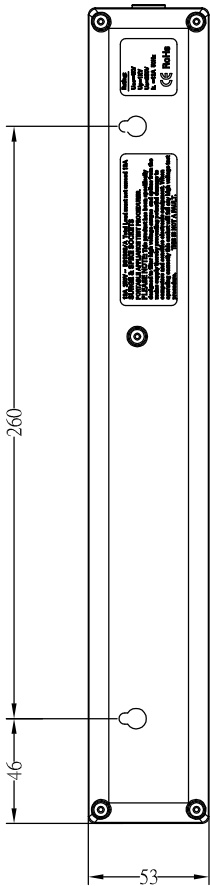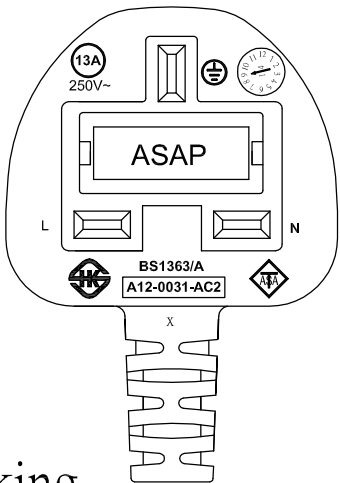

.X±	X.°±	UNITS mm	P/N: 42 0576					
.X±	.X°±							
.XX±	.XX°±	MATL	PART NO: L8CAC052-QT-N	TITLE: UK POWER PLUG TO 6 GANG UK SOCKET-OUTLET L=5.0M White				
.XXX±	.XXX°±							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ASAP TECHNO- LOGY(JIANGXI)CO., LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ASAP TECHNO- LOGY(JIANGXI)CO., LIMITED.		FINISH	APPD: Baogen Yang		DWG NO: ACRDN15060043-007			
			CHKD: Guangren Ouyang					
		Q'TY	DR: Hongmei Hu			SCALE	SHEET	REV.
						NONE	2/2	A