



UL 94 V2

Hook and Loop

Back to Back Reels

Description

- Knit loop laminated to a polyester/polypropylene mushroom.
- Widths: 9 mm, 16 mm, 20 mm, 25 mm, 50 mm.
- Coloris standards :




▪ Mushroom :						
▪ Loop :						
	008	052	091	051	006	000

- Available in continuous rolls.

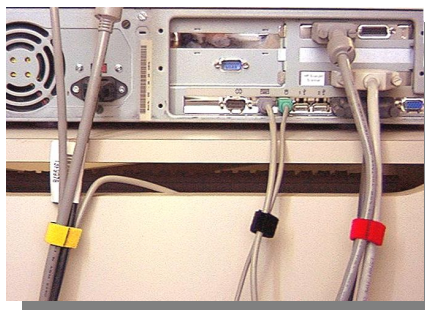
Packaging

- 25 meter rolls.

Performances

	Resistance	Shear Strength cN/cm ²	Traction Strength cN/cm ²	Peel Strength cN/cm
Cycle life				
New state		1500	200	30
200 operations		1300	150	30

The above values are multiple data averages according to the French Norm EN 12242, WI 248 172, NF G91- 103 and STI/QUA 87 and 88. cN/cm² ~ g/cm²



Technical characteristics

PHYSICAL CHARACTERISTICS	▪ Thickness: $3 \pm 0,5$ mm
EFFECT OF TEMPERATURE	▪ Resist heat up to 100°C (212°F)

Certifications

Fire Certifications (aplix® 800 fire retardant)
▪ FAR 25-853 (60s) et (12s) ▪ UL94V2