

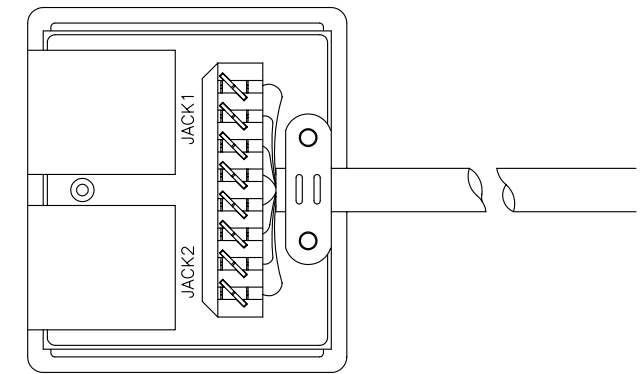


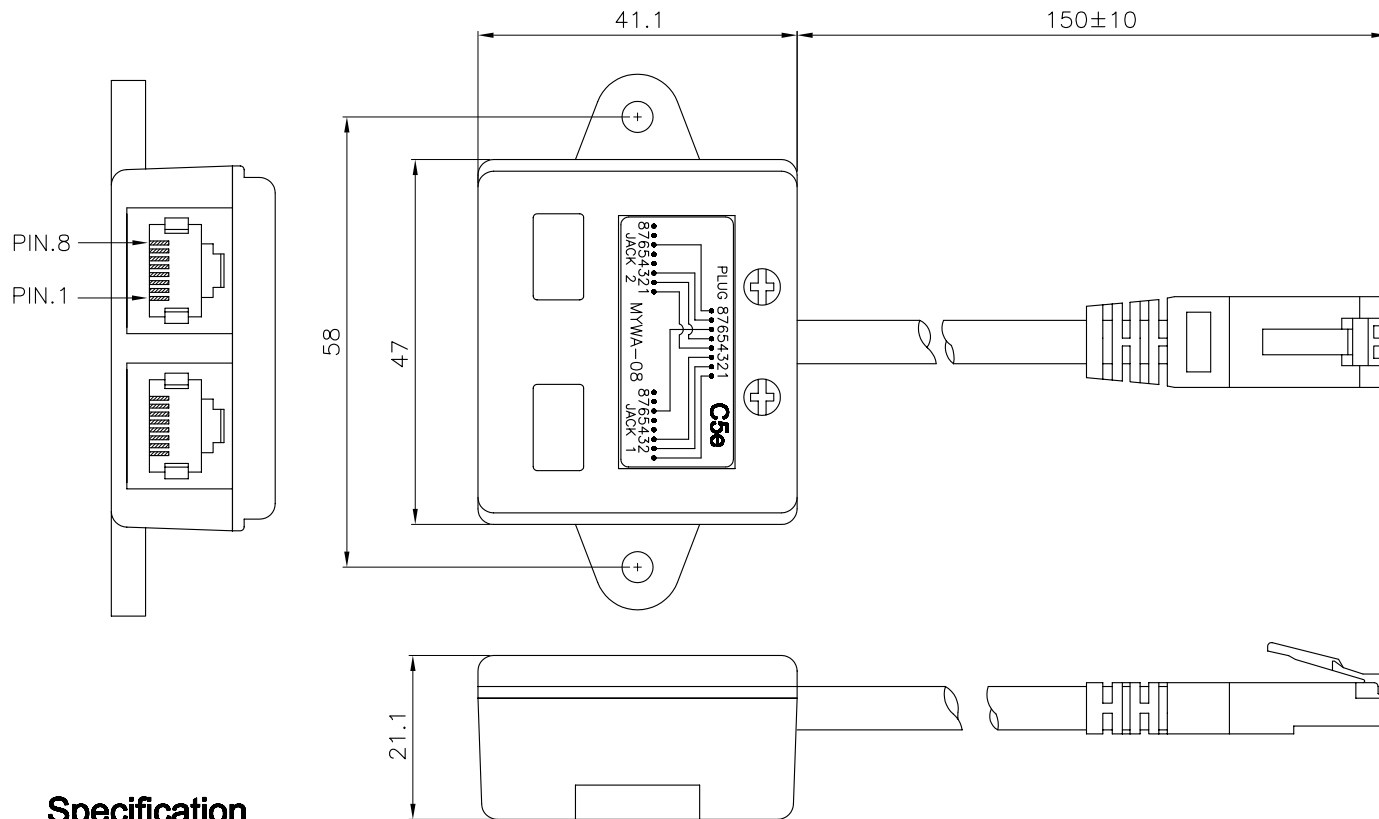


Specification

- Upper & Button Case : ABS UL94 HB, white color.
- RJ45 plug : PC UL94 V0, contact is 6u" gold plating.
- RJ45 Jack : Body: PBT UL94 V0 rated.
Contact: Phosphor Bronze with 50u" gold plated
over nickel plated in contact area.
Tin-lead over nickel in solder area.
- Cable: Cat.5e cable ,4pair ,24AWG
- P.C.B : 1.6m/m , double side , FR4.
- Operation Temperature : -40°C to 80°C.
- Insertion Force : 900gms for 8 contacts.
- Retention Strength : 7.7 kgs between jack and plug.
- Durability :
750 Cycles contact resistance test check every
100 cycles. Insertion cycles at 20 cycles/minute max.

wiring information

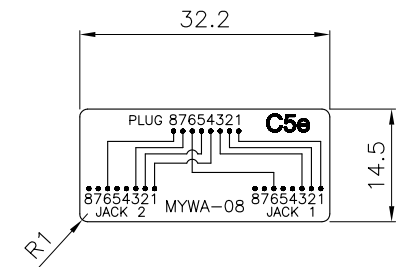

	DSGN	KLi	25.SEP.2004	ITEM NO: 22 2130
	CHK			
	APPR			MYWA08-E/BK
	Velocity			
UNIT	M / M			
SCALE	1/1			
DWG NO: 22 2130				