

UNIT: mm

FOUR CONDUCTOR / SIX POSITION PLUG

修訂NO	修訂內容	DATE
1		
2		
3		

UNIT:MILLIMETER

DIM	
A	11.24±0.1
B	7.2±0.1
C	4.95±0.05
D	0.40±0.05
E	2.48±0.10
F	13.45±0.10
G	1.1±0.05
H	1.0±0.05
I	1.5±0.05

1. MATERIAL

1)HOUSING: POLYCARBONATE(PC)
UL 94-V0 , COLOR: WHITE(202173#)

2)CONTACT: GOLD BLADE X4PCS

GOLD PLATING 0.000003 INCH THICKNESS

ON NICKEL PLATING 0.000100 INCH THICKNESS
OR GOLD THICKNESS BY CUSTOMER REQUIRE


2. ELECTRICAL TEST

1)CURRENT RATING :2.0 AMPS

2)INSULATION RESISTANCE :100M OHM MIN

3)CONTACT RESISTANCE :20m OHM MAX

3. COMPLIES WITH FCC68.500 SPECIFICATION

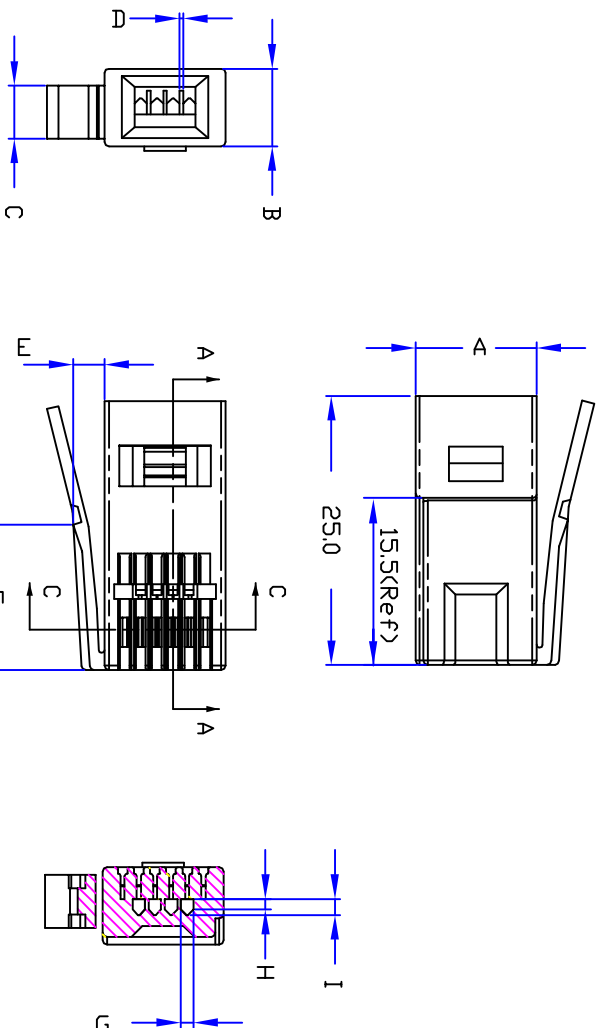

CUSTOMER	ITEM NO.
	22 2145

U.K PLUG

VELOCITY

DATE	DRAWING NO.	APPROVED	CHECKED	DRAWN BY
	L.Y0507186			9/12/97

REV- SION	A--0			2005.07.28
--------------	------	--	--	------------