

DATASHEET


USB2.0 - RS232 Converter



USB2.0

USB A plug to DSub 9-pole plug, 1.8 metres
Supports RS-232, DB9, DB25
Connection of serial devices to USB
Power supply via USB interface
Chipset: FTDI
Supports WIN98SE/ME/2000/XP/VISTA/WIN7/8/10/LINUX/MACOS
Included in delivery: gender changer DB9 jack/DB25

Transmission rate:	1024 kbps
Service primary side:	USB
Connection type primary side:	USB-A
Service secondary side:	RS232
Connection type secondary side:	D-Sub 9-pin plug
Bi-directional:	False
Over current protection:	False
Galvanic separation:	without
Nominal electricity consumption:	- mA

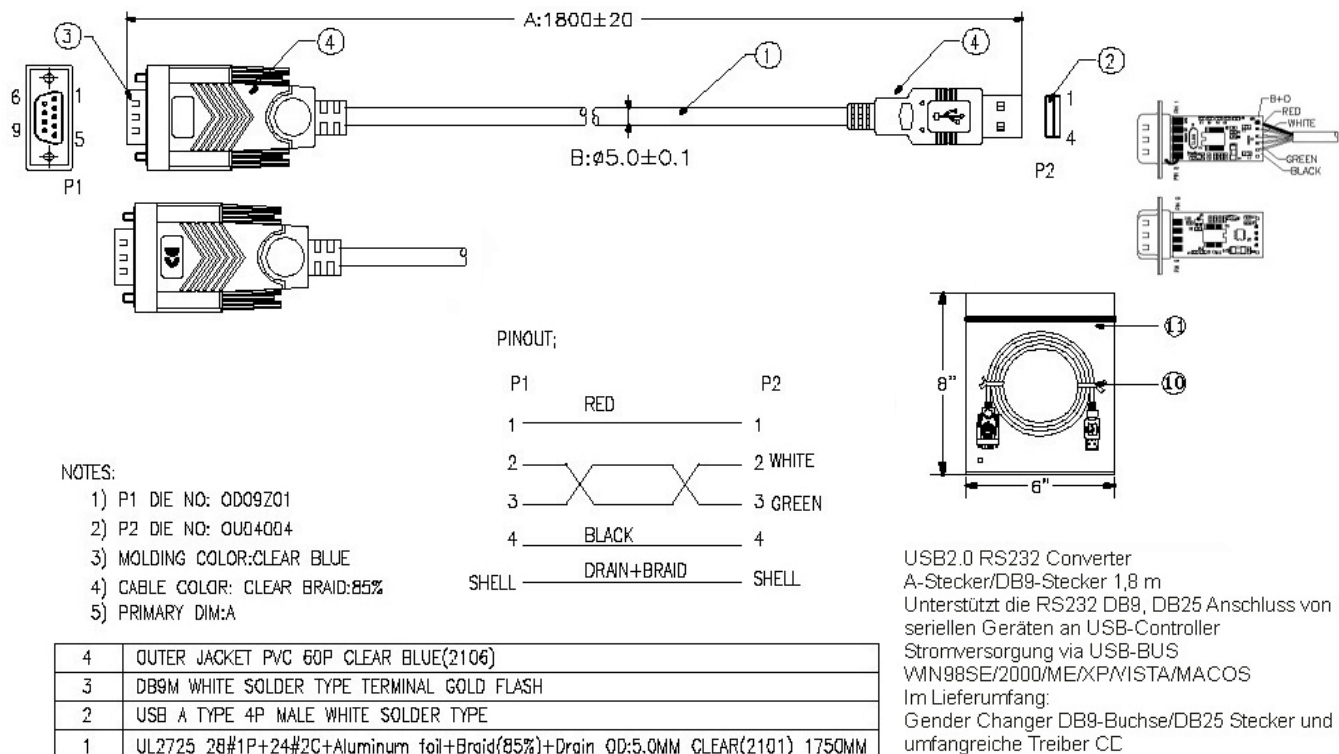

Article no.

40 1029

Title

USB2.0/RS232 Converter, aktiv A-plug/DB9-plug 1.8m