

PRODUCT DATASHEET

ENDURA STYLE Lantern Classic Up 10 W BK

ENDURA STYLE LANTERN CLASSIC | Traditional lantern shapes equipped with modern LED technology



AREAS OF APPLICATION

- Outdoor
- Building facades
- Entrance lighting

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP44
- Available in two housing colors
- Available as up or down luminaires



TECHNICAL DATA


Electrical data

Operating mode	Mains voltage
Nominal wattage	10.00 W
Nominal voltage	220...240 V
Mains frequency	50/60 Hz

Photometrical data

Color temperature	3000 K
Luminous flux	550 lm
Light color (designation)	Warm White
Color rendering index Ra	>80

Dimensions & weight

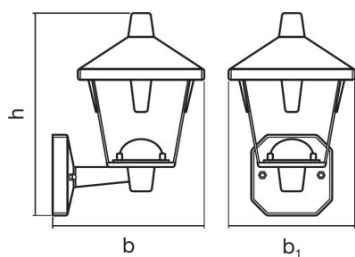

Length	216.0 mm
Width	180.0 mm
Height	289.0 mm
Product weight	713.00 g

Colors & materials

Body material	Aluminum
Product color	Black

Temperatures & operating conditions

Ambient temperature range	-20...40 °C
----------------------------------	-------------

Lifespan

Lifespan	30000 h
-----------------	---------

Capabilities

Dimmable	No
-----------------	----

Certificates & standards

Protection class	I
Type of protection	IP44
Standards	CE

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075032323	ENDURA STYLE Lantern Classic Up 10 W BK	Shipping carton box 4	485 mm x 441 mm x 320 mm	68.44 dm ³	5687.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

- ▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.