

PRODUCT FAMILY DATASHEET

PLANON Pure

Slim panel luminaires for recessed ceiling mounting



AREAS OF APPLICATION

- For indoor use only
- Decorative domestic lighting
- For recessed mounting

PRODUCT BENEFITS

- Very homogenous light
- Easy and quick installation

PRODUCT FEATURES


- Ceiling luminaire with advanced LED technology
- Recessed ceiling mounting




TECHNICAL DATA

Product description	Electrical data				Photometrical data				Dimensions & weight		
	Operating mode	Nominal wattage	Nominal voltage	Mains frequency	Color temperature	Luminous flux	Light color (designation)	Color rendering index Ra	Length	Width	Height
PLANON PURE 60x60 36 W 830	Integrated LED driver	36.00 W	220...240 V	50/60 Hz	3000 K	3200 lm	Warm White	>80	595.0 mm	595.0 mm	10.5 mm
PLANON PURE 60x60 36 W 840	Integrated LED driver	36.00 W	220...240 V	50/60 Hz	4000 K	3200 lm	Cool White	>80	595.0 mm	595.0 mm	10.5 mm
PLANON PURE 30x60 15 W 830	Mains voltage	15.00 W	220...240 V	50/60 Hz	3000 K	1400 lm	Warm White	>80	595.0 mm	295.0 mm	10.5 mm
PLANON PURE 30x60 15 W 840	Integrated LED driver	15.00 W	220...240 V	50/60 Hz	4000 K	1400 lm	Cool White	>80	595.0 mm	295.0 mm	10.5 mm
PLANON PURE 30x120 36 W 830	Mains voltage	36.00 W	220...240 V	50/60 Hz	3000 K	3400 lm	Warm White	>80	1195 mm	295.0 mm	10.5 mm
PLANON PURE 30x120 36 W 840	Integrated LED driver	36.00 W	220...240 V	50/60 Hz	4000 K	3400 lm	Cool White	>80	1195 mm	295.0 mm	10.5 mm


Product description	Colors & materials		Capabilities		Certificates & standards	
	Body material	Product color	Dimmable	Type of connection	Protection class	Type of protection
PLANON PURE 60x60 36 W 830	Metal	White	No	Cable, 2-pole	II	IP20
PLANON PURE 60x60 36 W 840	Metal	White	No	Cable, 2-pole	II	IP20
PLANON PURE 30x60 15 W 830	Metal	White	No	Cable, 2-pole	II	IP20
PLANON PURE 30x60 15 W 840	Metal	White	No	Cable, 2-pole	II	IP20
PLANON PURE 30x120 36 W 830	Metal	White	No	Cable, 2-pole	II	IP20
PLANON PURE 30x120 36 W 840	Metal	White	No	Cable, 2-pole	II	IP20

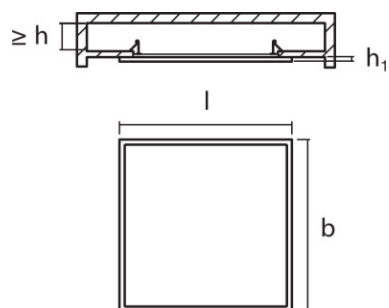

PLANON PURE 60x60 36 W 830,
PLANON PURE 60x60 36 W 840

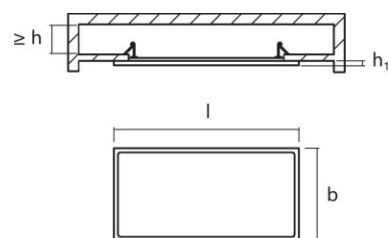

PLANON PURE 30x60 15 W 830,
PLANON PURE 30x60 15 W 840

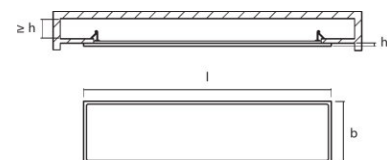

PLANON PURE 30x120 36 W 830,
PLANON PURE 30x120 36 W 840

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075035348	PLANON PURE 60x60 36 W 830	Shipping carton box 4	647 mm x 267 mm x 688 mm	118.85 dm ³	14926.00 g
4058075035362	PLANON PURE 60x60 36 W 840	Shipping carton box 4	647 mm x 267 mm x 688 mm	118.85 dm ³	14680.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075035386	PLANON PURE 30x60 15 W 830	Shipping carton box 4	647 mm x 267 mm x 388 mm	67.03 dm ³	8354.00 g
4058075035409	PLANON PURE 30x60 15 W 840	Shipping carton box 4	647 mm x 267 mm x 388 mm	67.03 dm ³	8356.00 g
4058075035423	PLANON PURE 30x120 36 W 830	Shipping carton box 4	1267 mm x 267 mm x 373 mm	126.18 dm ³	14880.00 g
4058075035447	PLANON PURE 30x120 36 W 840	Shipping carton box 4	1267 mm x 267 mm x 373 mm	126.18 dm ³	14790.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.