CRIMSON
AV MOUNTING SOLUTIONS

Flat Panel Ceiling Mount
For 10" to 32" (25.4-81.3cm) LCD and Plasma TVs

CV100 (BLACK)
CV100W (WHITE)

For Unistrut installation

Ideal for security monitor/camera combinations in a warehouse setting. Attaches to Unistrut tracking with ability to align the whole system after it is installed. Features downward tilt of up to 25°, 360° rotation and continuous telescoping adjustment for variable drop lengths to provide perfect screen positioning. Includes hardware for connecting to Unistrut as well as monitor hardware. Open top mounting slots in the adapter plate simplyfy the process of hanging the monitor by freeing the installer's hands, simply hang the screen and attach bottom screws to lock in place. UL Listed.

- **Various Screen Sizes**
  Fits most 10" to 32" flat panel screens weighing 40lb or less.

- **VESA Compatible**
  Fits VESA hole patterns with 75x75mm and 100x100mm sizes.

- **Height Adjustment**
  Telescoping adjustments from 3' to 5', 5' to 9' and 8' to 15'.

- **Easy Installation**
  Adapter easily attaches to unistrut.

- **Cable Management**
  Easily route cables through openings at the top and bottom of the extension column.

- **Multi-Angle Positioning**
  Up to 25° of continuous tilt and 360° rotation.

- **Post-Installation Leveling**
  Entire assembly can be leveled after installation. Leveling mechanism is at the very top, allowing for the pole as well as the monitor to be leveled.

10"-32" / 25.4cm-81.3cm   40 LB / 18 KG

Functional Specifications

Tilt: *+25°/-0°* Rotation: *360°*	**Mounting Surfaces:** *Unistrut and similar track systems, other structural surfaces such as wood or concrete (additional hardware may be required)*	MaxMountingPattern: *100mm (3.9") width* *100mm (3.9") height*	Drop Length: *3 sizes (up to 15')* Load Capacity: *40 LB / 18 KG* Warranty: *Limited 10 Years*

Post-Installation Leveling
Aligns the whole column not just the monitor.

VESA Compatible
Fits VESA hole patterns with 75x75mm and 100x100mm sizes.

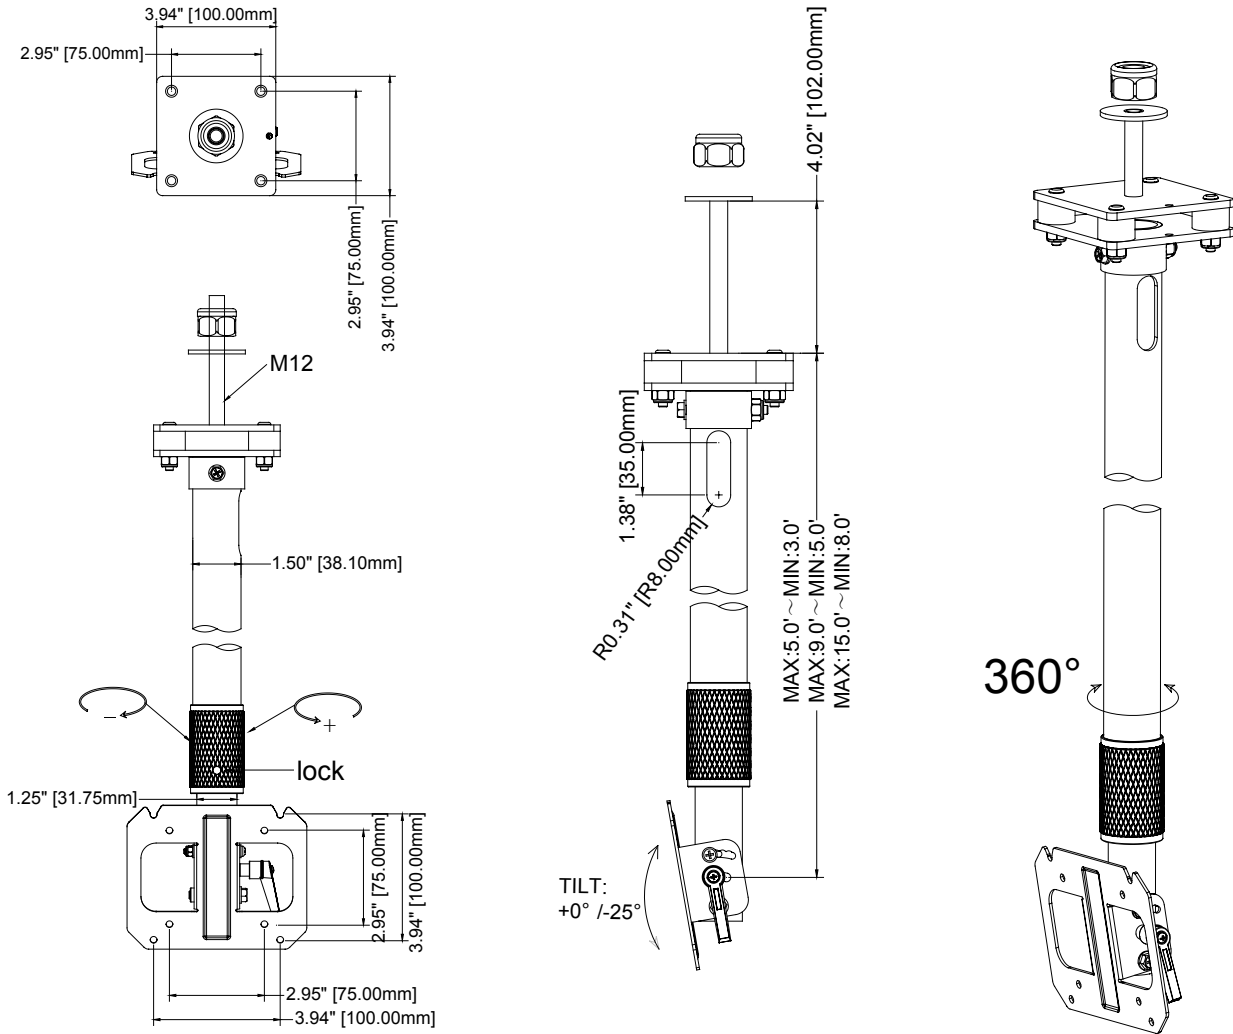**Adjustable Drop Length**
Continuous telescoping adjustment.

Mounting Surface
Unistrut mounting hardware included.

Tilt
Up to 25º tilt for optimal viewing angles.

3.94" [100.00mm]
2.95" [75.00mm]
2.95" [75.00mm]
3.94" [100.00mm]

M12

1.50" [38.10mm]

lock

1.25" [31.75mm]

2.95" [75.00mm]
3.94" [100.00mm]

2.95" [75.00mm]
3.94" [100.00mm]

4.02" [102.00mm]

1.38" [35.00mm]

R0.31" [R8.00mm]

MAX:5.0' ~ MIN:3.0'
MAX:9.0' ~ MIN:5.0'
MAX:15.0' ~ MIN:8.0'

TILT:
+0° /-25°

360°

Product Specifications / Package Specifications

Product Specifications				Package Specifications			
PRODUCT WEIGHT	LOAD CAPACITY	COLORS	FINISH	PACKAGE SIZE (WxHxD)	SHIP WEIGHT	UPC CODE	PACKAGE CONTENTS
7.9lb (3.6kg)	40lb (18kg)	Black White	Scratch resistant powder coating	48"x6"x6"	10.3lb (4.7kg)	CV100-35A (3'- 5') 0815885014857(Black) 0815885014888(White)	Ceiling adapter, adjustable column, mount box, mounting hardware, manual.
13.4lb (6.1kg)				73"x6"x6"	16.3lb (7.4kg)	CV100-59A (5'- 9') 0815885014864(Black) 0815885014895(White)	
18.3lb (8.3kg)				109"x6"x6"	21.6lb (9.8kg)	CV100-18A (8'- 15') 0815885014871(Black) 0815885014901(White)	

Mounting Interface

W
H

Max Mounting Pattern
100mm (W) x 100mm (H)

VESA
	W	75mm	100mm
	X	X	X
	H	75mm	100mm