


Delock PCI Card > 1 x Serial RS-232

Description

This PCI card by Delock expands a PC by one external serial port. Different devices such as scanner, printer, mouse etc. can be connected to this card. By using the included low profile bracket, the PCI card can be also installed into a Mini-PC.

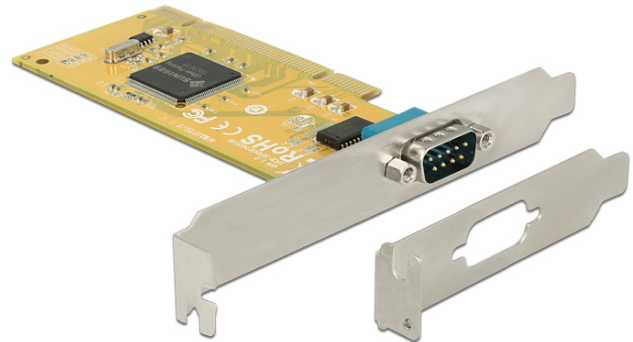

Specification

- Connectors:
external: 1 x serial RS-232 DB9 male
internal: 1 x 32-Bit PCI standard 3.0
- Chipset: SUN1989
- Compliance with PCI 33 MHz Ver. 3.0/2.3/2.2./2.1 specification
- Supports both 64-bit & 32-bit PCI bus slots and 3.3 V & 5 V power
- Signals: DCD, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI
- ±2 kV ESD protection for all serial signals
- Data transfer rate up to 115.2 Kb/s
- FIFO: 128 byte
- Compatible with 16C950 UART
- Operating temperature: 0 °C ~ 60 °C
- Humidity: 5 ~ 95 %

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6.38
- PC with one free PCI slot

Package content

- PCI card
- 1 x low profile bracket
- Driver CD
- User manual

Item no. 89592



EAN: 4043619895922

Country of origin: China

Package: Retail Box



Images



General	
Supported operating system:	standard Linux ex Kernel 2.6.38 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Protection:	standard ESD (Electrostatic Discharge)
Interface	
External:	standard 1 x serial RS-232 DB9 male
Internal:	standard 1 x PCI V3.0/2.3/2.2/2.1
Technical characteristics	
Chipset:	standard SUNIX
Data transfer rate:	standard up to 115,2 Kb/s
FIFO:	standard 128 byte
Operating temperature:	standard 0 °C ~ 60 °C
Humidity:	standard 5 ~ 95 %
UART:	standard 16C950
Physical characteristics	
Slot bracket:	standard low profile standard
Length:	standard 120 mm
Width:	standard 51 mm
Height:	standard 6.6 mm