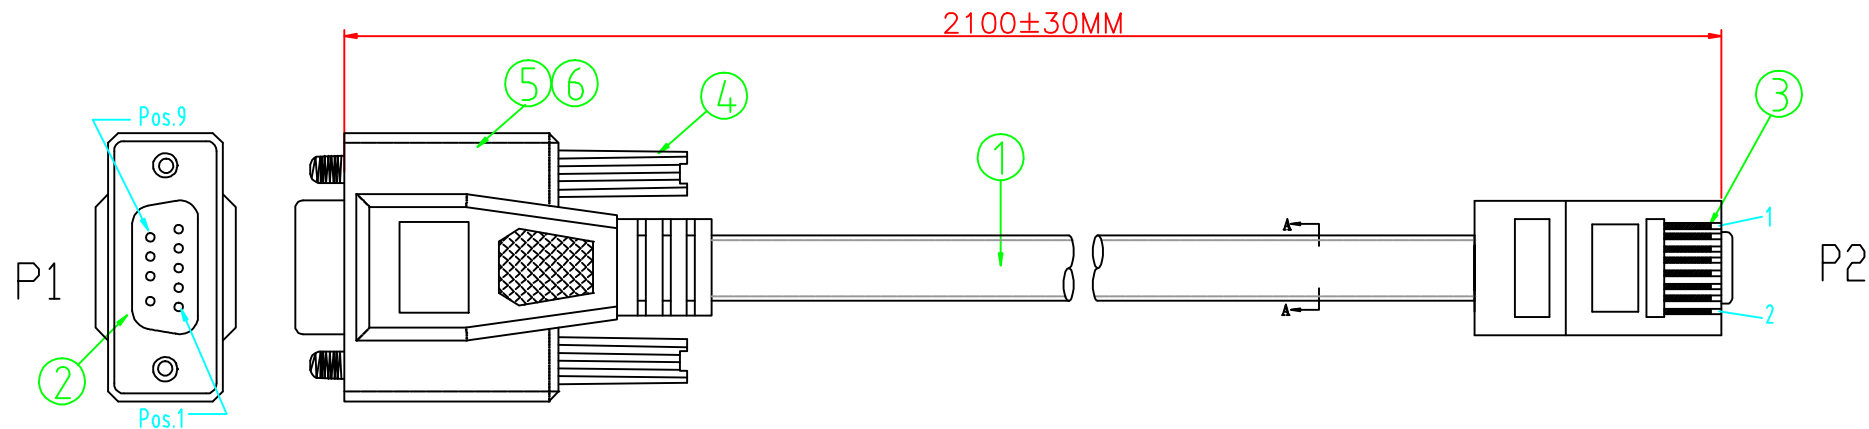


NOTES:
 1:100% short,open and miss wire test.
 2:Insulation resistance:DC300V 10MΩ(Min)
 Conduction resistance 5Ω(Max)

PIN OUT		
P1		P2
8	_____	1
6	_____	2
2	_____	3
5	_____	4
5	_____	5
3	_____	6
4	_____	7
7	_____	8

⑥	OUTER MOLDED	45P PVC,COLOR:pantone 17-4435 tpx	0.024	KG
⑤	INNER MOLDED	LDPE	0.024	KG
④	SCREW	#4-40UNC 2.3*45.5MM,PVC COLOR:pantone 17-4435 tpx	4	PCS
③	CONNECTOR	UTP CAT.5E 8P8C TRANSPARENT PC HEAD,THE PIN GOLD GOLD PLATED	1	PCS
②	CONNECTOR	DB 9PIN/FEMALE,BLUE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	FLAT CABLE:8C*26AWG,JACKET:PVC,COLOR:pantone 17-4435 tpx,OD:2.7*8.8±0.2	2100	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date DEC 14.2016	File name DB9PIN F/RJ45 2.1M	Date DEC 14.2016	Scale FREE	
ANGLE: 			DB9PIN F TO RJ45,26AWG;pantone 17-4435 tpx,2.1M			
UNIT:MM			32 0386		Edition 1/1	Sheet 1/1